

# SB120 thru SB1100

Schottky Barrier Rectifiers  
Reverse Voltage 20 to 100V Forward Current 1.0A

## Feature & Dimensions

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* Low power loss, high efficiency
- \* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- \* Guarding for over voltage protection
- \* High temperature soldering guaranteed:  
260°C/10 seconds at terminals

## Mechanical Data

**Case:** JEDEC DO-41, molded plastic over glass body


**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.011 oz., 0.284 g

**Handling Precaution:** None

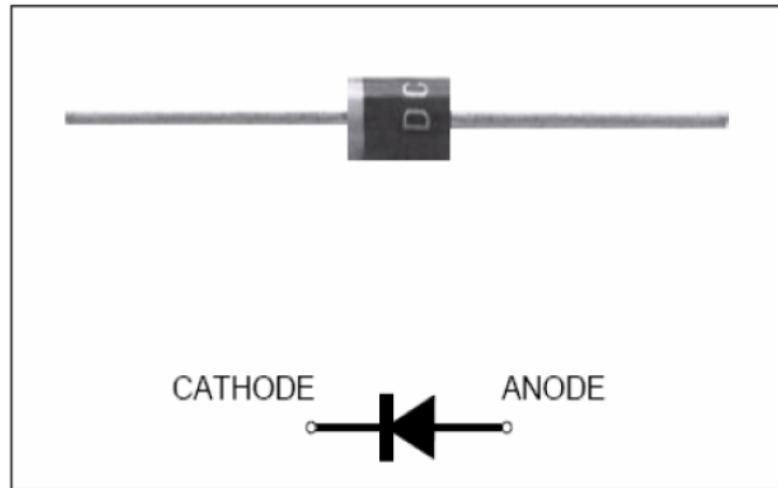

We declare that the material of product compliance with ROHS requirements

## 1. Electrical Characteristic

**Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.**

Parameter Symbol	symbol	SB 120	SB 130	SB 140	SB 150	SB 160	SB 180	SB 190	SB 1100	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	90	100	V
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	56	63	70	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	I <sub>F(AV)</sub>	1.0							A	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30							A	
Typical thermal resistance (Note 1)	R <sub>θJA</sub>	35							°C/W	
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>TSG</sub>	-40 to +125							°C	

**Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.**

Parameter Symbol	symbol	SB 120	SB 130	SB 140	SB 150	SB 160	SB 180	SB 190	SB 1100	Unit
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	0.50			0.70		0.84			V
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	I <sub>R</sub>	0.5			10					mA
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>	110							PF	

NOTES:

1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

# SB120 thru SB1100

## 2. Characteristic Curves ( TA = 25°C unless otherwise noted )

Fig. 1 – Forward Current Derating Curve

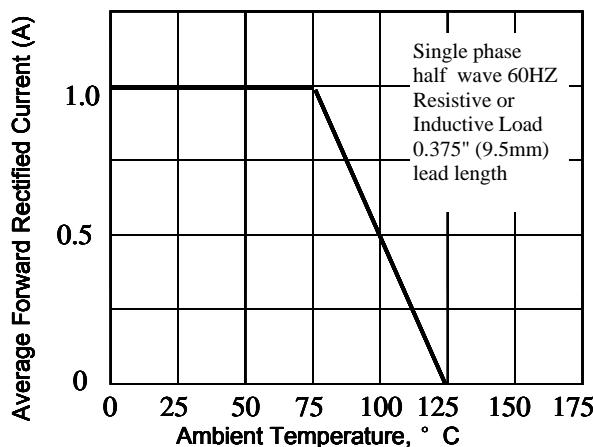


Fig. 3. – Typical Instantaneous Forward Characteristics

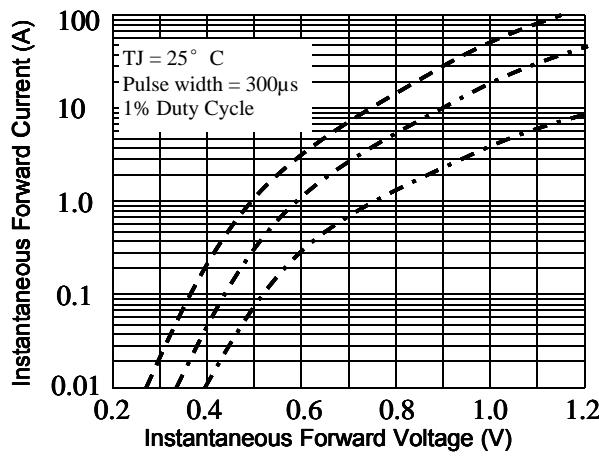


Fig 5. –typical transient thermal impedance

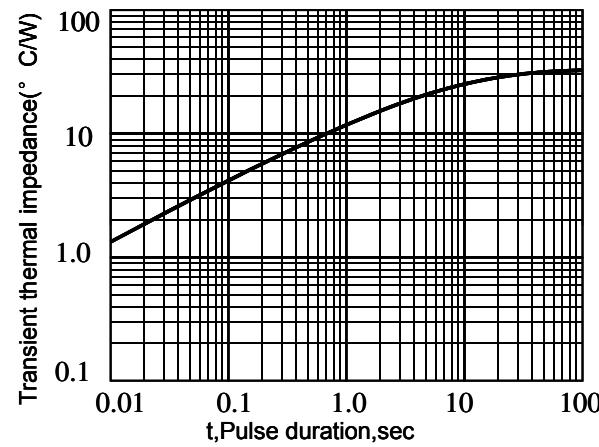


Fig. 2 – Maximum Non-repetitive Peak Forward Surge Current

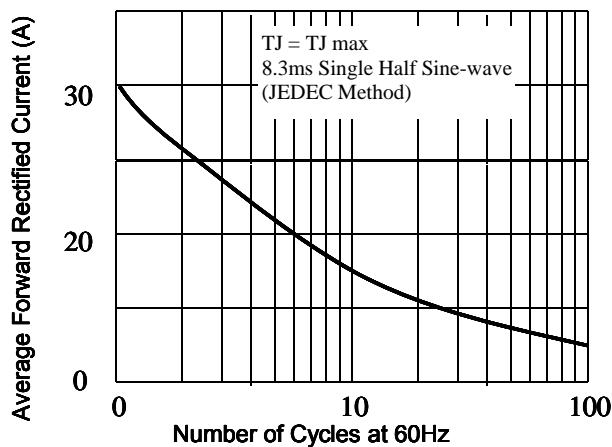


Fig 4. – Typical Reverse Characteristics



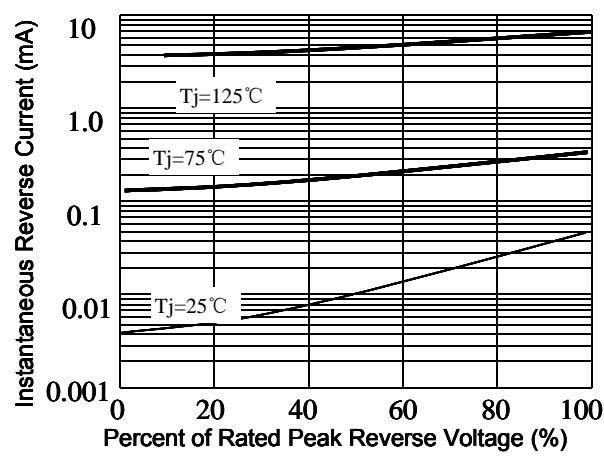


Fig 6. – Typical Junction Capacitance

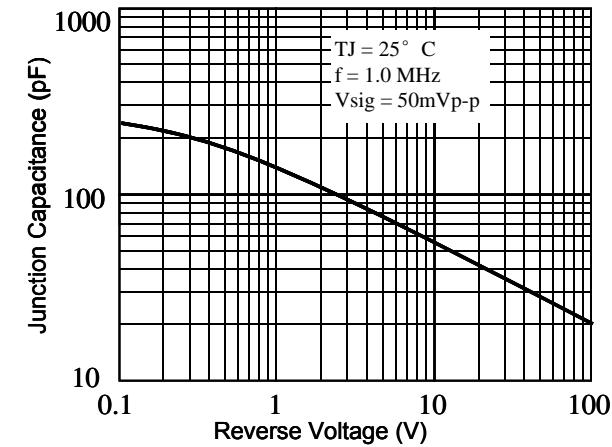

**SB120 thru SB1100****3. dimension:**

Package outline

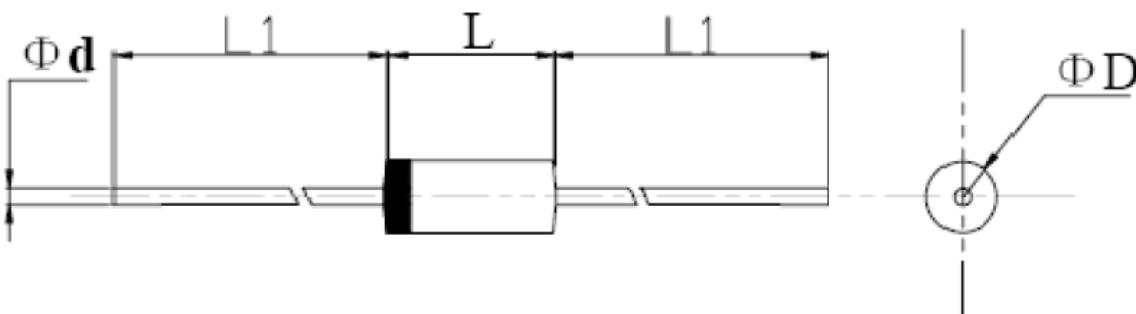

Dimensions					Note: DO-41 molded plastic case The marking band indicates the cathode
	inches		mm		
	Min.	Max.	Min.	Max.	
L	0.166	0.205	4.2	5.2	
L1	0.866	-	22	-	
$\Phi D$	0.080	0.107	2.0	2.7	
$\Phi d$	0.028	0.034	0.7	0.9	

**SB120 thru SB1100****4. Update Record**

版次	更新记录	更新作者	更新日期
1	第一版	余波	2010-5-27



电子元器件线上授权代理开拓者  
原厂授权 · 正品现货 · 一件即发

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)