

LNB8303DT0AG

N-Channel Logic Level Enhancement Mode MOSFET

1. FEATURES


- Low thermal impedance.
- Fast switching speed.
- We declare that the material of product are Halogen Free and compliance with RoHS requirements.



DFN3333-8A

2. APPLICATION

- Power Routing
- DC/DC Conversion
- Motor Drives



3. ORDERING INFORMATION

Device	Marking	Shipping
LNB8303DT0AG	AB	2000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25°C)

Parameter		Symbol	Limits	Unit
Drain-to-Source Voltage		VDSS	30	V
Gate-to-Source Voltage		VGS	±20	V
Avalanche Current(L = 0.1mH)		IAS	34	A
Avalanche energy(L = 0.1mH)		EAS	59	mJ
Continuous Drain Current(Note 1)	TC =25°C	ID	37	A
	TA =25°C		22	
	TC =100°C		25	
	TA =100°C		13	
Pulsed Drain Current (Note 2)		IDM	148	
Power Dissipation(Note 1)	TC =25°C	PD	21	W
	TC =100°C		8.3	
	TA =25°C		2.5	
	TA =100°C		1	
Continuous Drain Current(Note 3)	TA =25°C	ID	11	A
	TA =100°C		7.2	
Power Dissipation(Note 3)		PD	0.7	W
Operating Junction Temperature		TJ	-55 ~+150	°C
Storage Temperature Range		Tstg	-55 ~+150	

5. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Maximum Junction-to-Ambient(Note 1)	RθJA	50	°C/W
Maximum Junction-to-Ambient(Note 3)	RθJA	175	
Maximum Junction-to-Case	RθJC	6	





- 1.Surface mounted on "1.5 x 1.5" FR4 board using 1 sq in pad, 2 oz Cu
- 2.Pulse width limited by maximum junction temperature.
- 3.Surface mounted on FR4 board using the minimum recommended pad size.

6. ELECTRICAL CHARACTERISTICS(Ta = 25°C)





Characteristic	Symbol	Min.	Typ.	Max.	Unit	
Static						
Drain-Source Breakdown Voltage (VGS = 0V, ID = 250 uA)	V(BR)DSS	30	-	-	V	
Gate-Source Threshold Voltage (VDS = VGS, ID = 250 uA)	VGS(th)	1	1.5	3	V	
Gate-Body Leakage (VDS = 0 V, VGS = ±20 V)	IGSS	-	-	±100	nA	
Zero Gate Voltage Drain Current (VDS = 24 V, VGS = 0 V)	IDSS	-	-	1	μA	
Drain-Source On-Resistance(Note 4) (VGS = 10 V, ID = 18 A) (VGS = 4.5 V, ID = 14 A)	RDS(on)	-	2.5 3	3.3 4.3	mΩ	
Dynamic						
Total Gate Charge(VGS =4.5V)	(VDS = 15 V, VGS = 10 V, ID = 18 A)	Qg	-	36	-	nC
Total Gate Charge(VGS =10V)		Qg	-	67.3	-	
Gate-Source Charge		Qgs	-	7.4	-	
Gate-Drain Charge		Qgd	-	14.7	-	
Input Capacitance	(VDS = 15 V, VGS = 0 V, f = 1 MHz)	Ciss	-	3178	-	pF
Output Capacitance		Coss	-	402	-	
Reverse Transfer Capacitance		Crss	-	311.9	-	
Turn-On Delay Time	(VDS = 15 V, ID = 1A, VGS = 10 V, RGS = 2.7 Ω)	td(on)	-	15	-	ns
Rise Time		tr	-	10	-	
Turn-Off Delay Time		td(off)	-	50	-	
Fall Time		tf	-	10	-	
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (TC = 25 ° C)						
Continuous Current	IS	-	-	37	A	
Pulsed Current	ISM	-	-	148	A	
Diode Forward Voltage (IF = 18A, VGS = 0V)	VSD	-	-	1.3	V	

4. Pulse test: $PW \leq 300\mu s$ duty cycle $\leq 2\%$.


7. ELECTRICAL CHARACTERISTICS CURVES

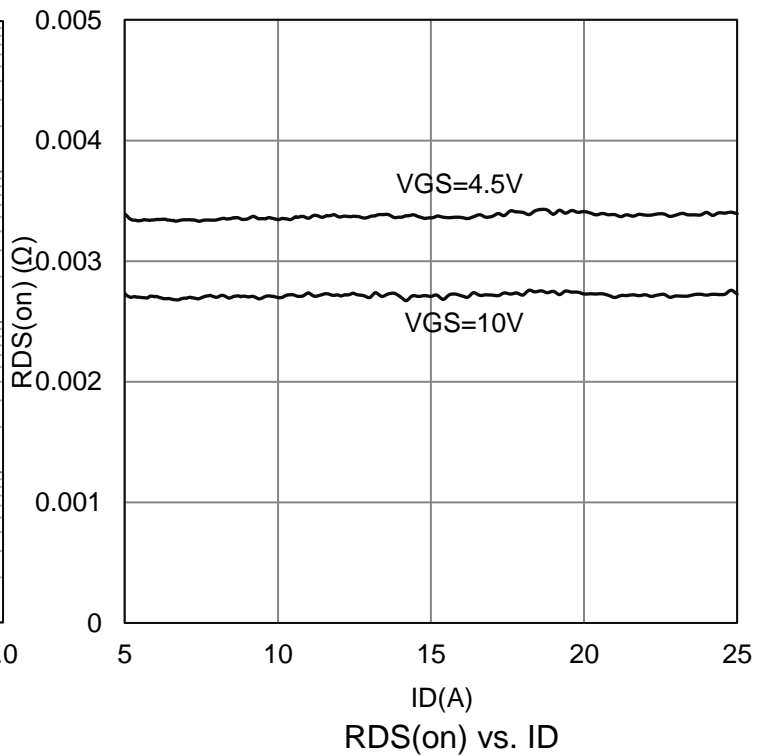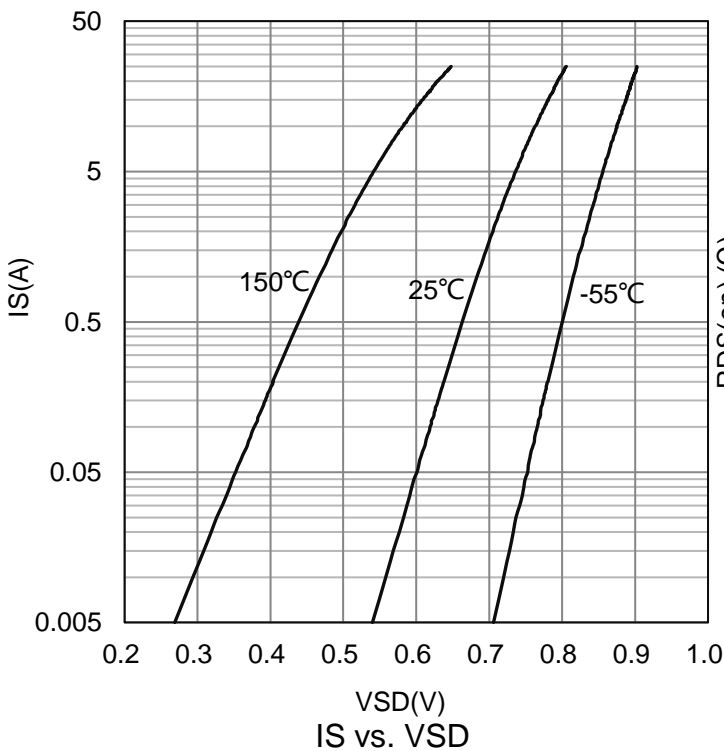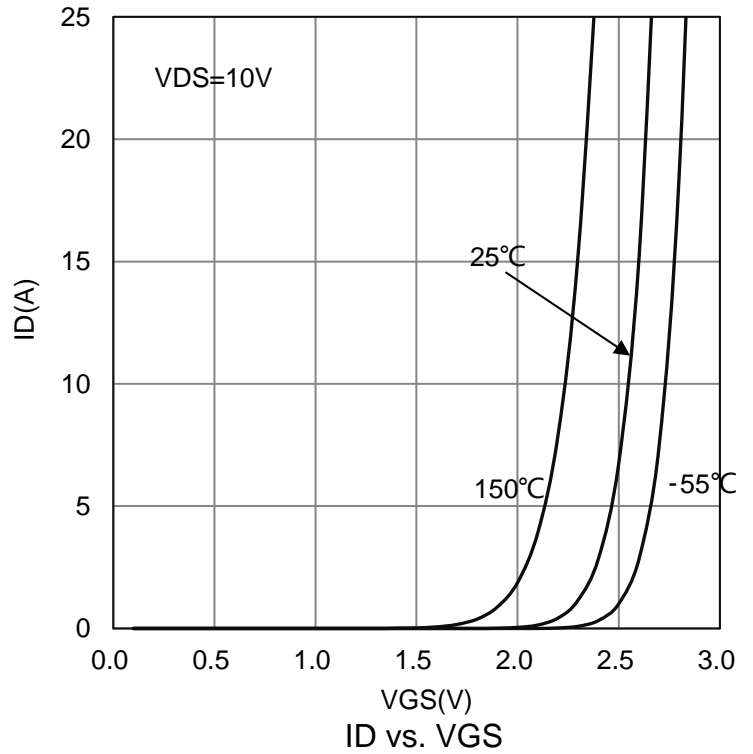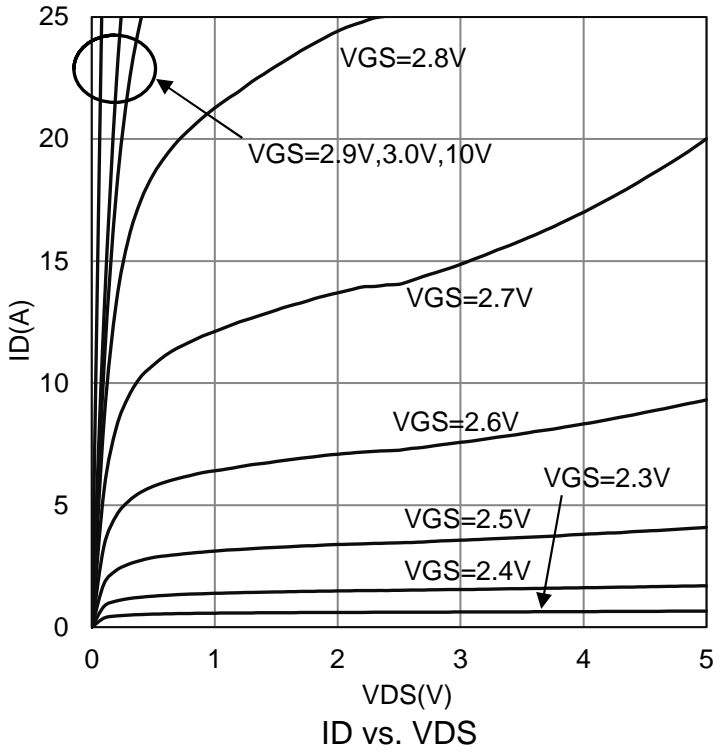

7.ELECTRICAL CHARACTERISTICS CURVES(Con.)

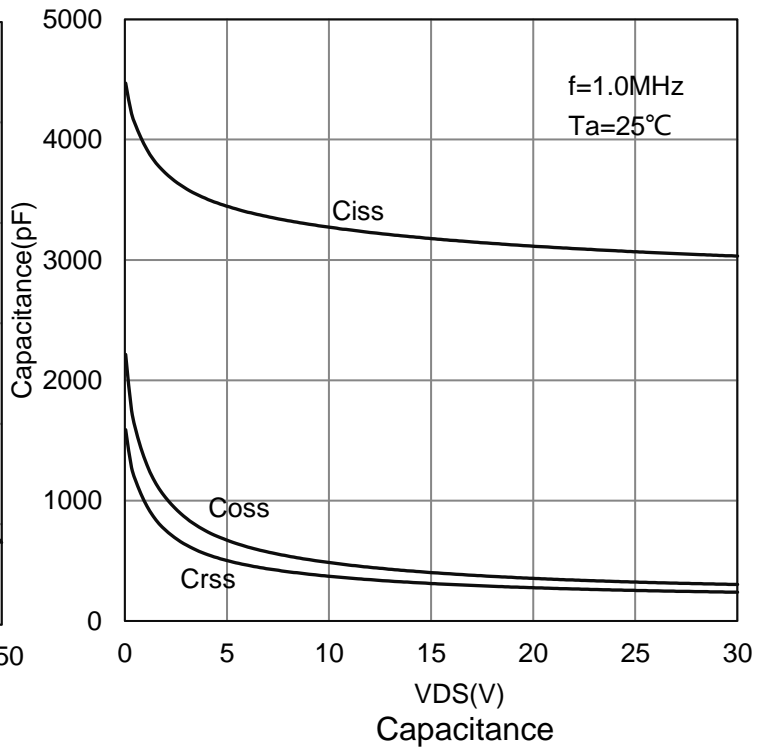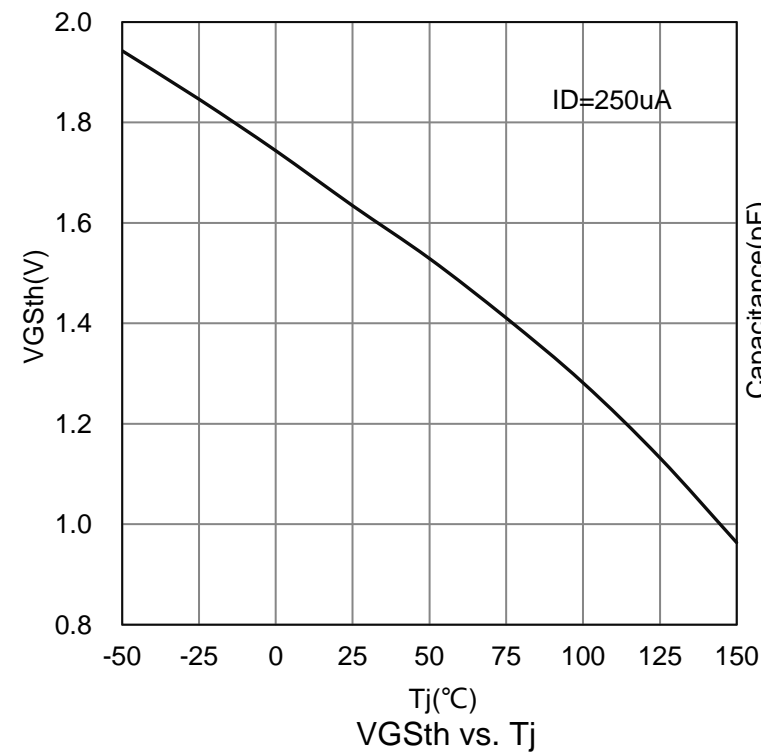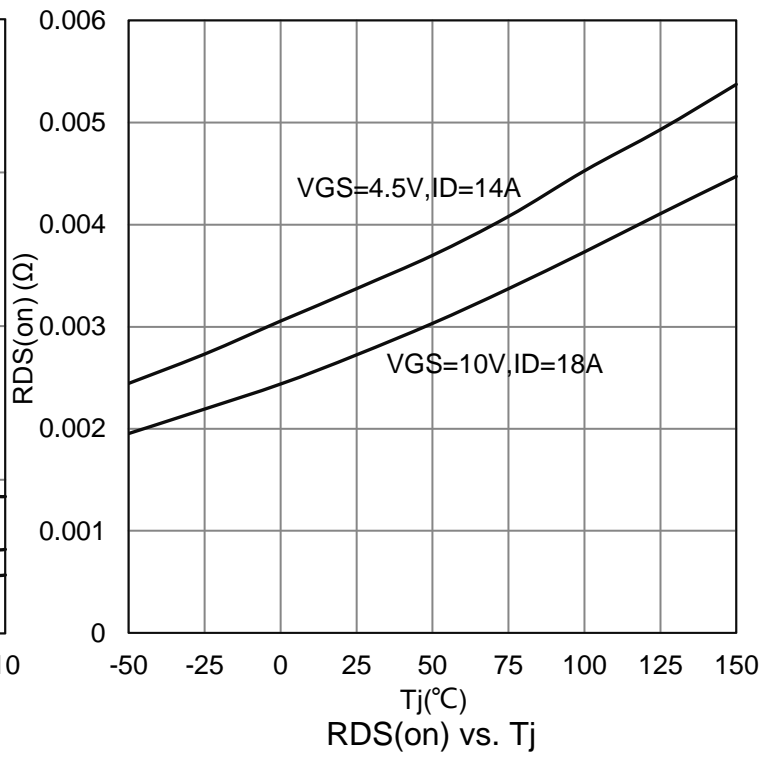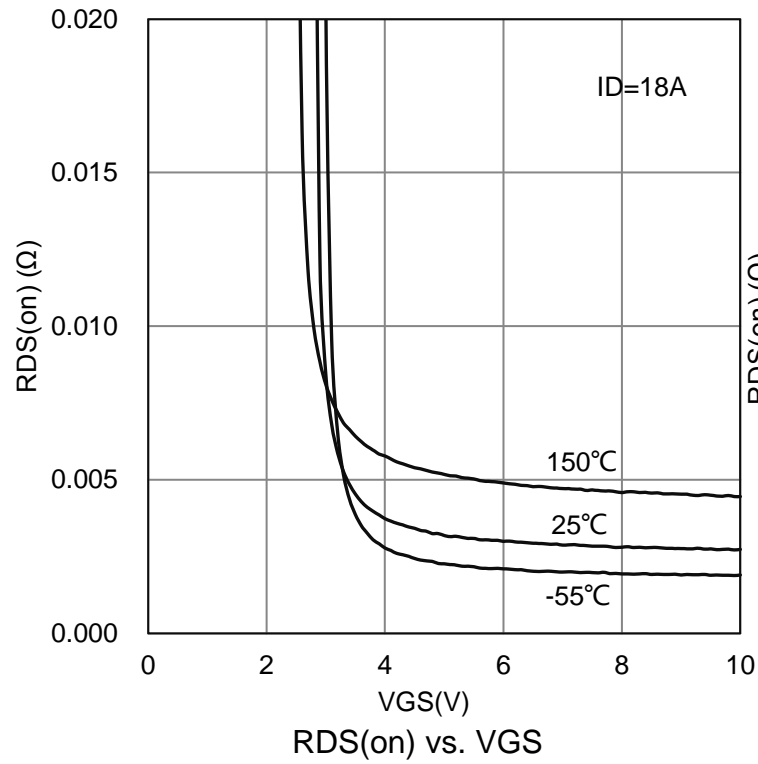


7.ELECTRICAL CHARACTERISTICS CURVES(Con.)

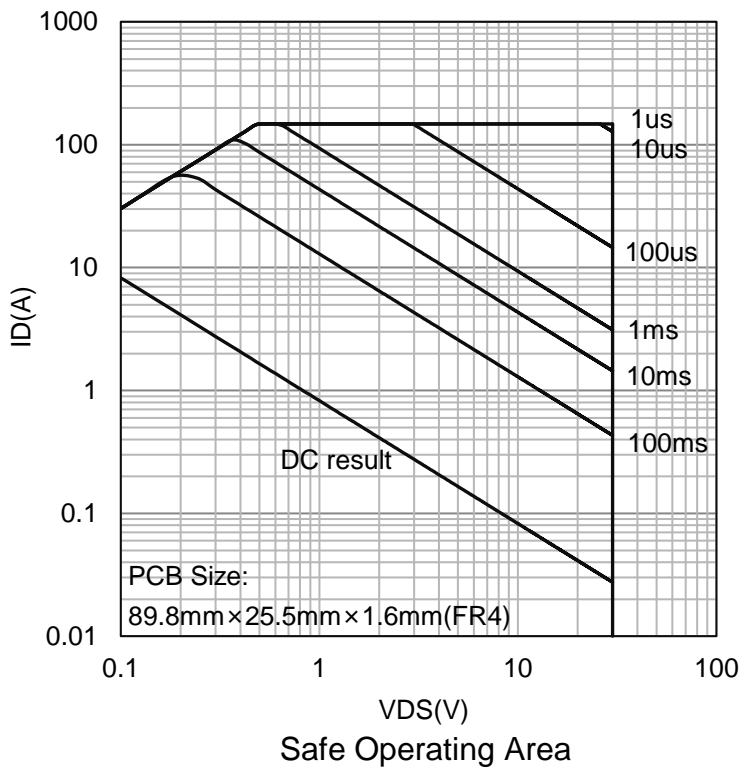


8. OUTLINE AND DIMENSIONS


DFN3333-8A



TOP VIEW

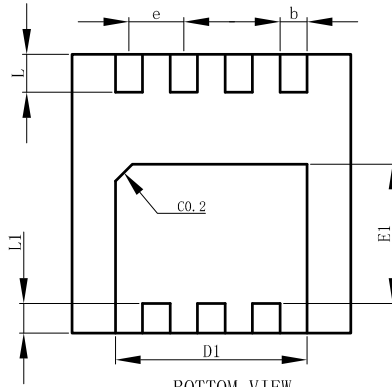

BOTTOM VIEW

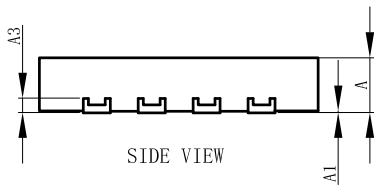


SIDE VIEW

DFN3333-8A			
DIM	MIN	NOR	MAX
A	0.60	0.65	0.70
A1	0.00	0.03	0.05
b	0.27	0.32	0.37
D	3.25	3.30	3.35
E	3.25	3.30	3.35
D1	2.22	2.27	2.32
E1	1.60	1.65	1.70
e	0.65BSC		
L	0.40	0.45	0.50
L1	0.30	0.35	0.40
A3	0.152REF.		
All Dimensions in mm			

9. SOLDERING FOOTPRINT

DFN3333-8A

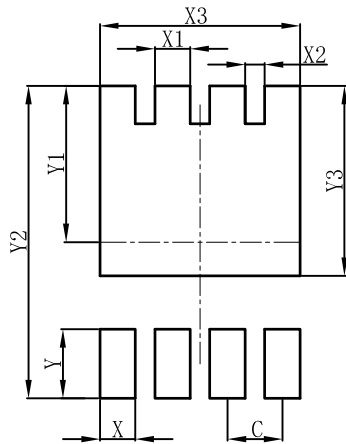

DFN3333-8A	
DIM	(mm)
C	0.65
X	0.42
X1	0.42
X2	0.23
X3	2.37
Y	0.70
Y1	1.85
Y2	3.70
Y3	2.25

DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)