



# High-Frequency Amplifier Transistor

## • Features

- 1.High transition frequency.(Typ. $f_T=1.5\text{GHz}$ )
- 2.Small  $r_{bb'}$  Cc and high gain.(Typ.6ps)
- 3.Small NF.
- 4.We declare that the material of product compliance with RoHS requirements.
- 5.S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

**L2SC3837LT1G**  
**S-L2SC3837LT1G**

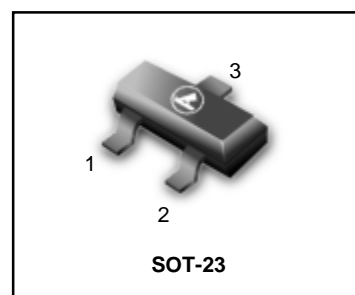

## MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Parameter                   | Symbol    | Value    | Unit             |
|-----------------------------|-----------|----------|------------------|
| Collector-Base Voltage      | $V_{CBO}$ | 30       | V                |
| Collector-Emitter Voltage   | $V_{CEO}$ | 18       | V                |
| Emitter-base voltage        | $V_{EBO}$ | 3        | V                |
| Collector Current           | $I_C$     | 50       | mA               |
| Collector power dissipation | $P_C$     | 0.2      | W                |
| Junction temperature        | $T_j$     | 150      | $^\circ\text{C}$ |
| Storage temperature         | $T_{sig}$ | -55~+150 | $^\circ\text{C}$ |

## DEVICE MARKING

L2SC3837LT1G;S-L2SC3837LT1G=AP

## • ORDERING INFORMATION

| Device                         | Package | Shipping          |
|--------------------------------|---------|-------------------|
| L2SC3837LT1G<br>S-L2SC3837LT1G | SOT-23  | 3000/Tape & Reel  |
| L2SC3837LT3G<br>S-L2SC3837LT3G | SOT-23  | 10000/Tape & Reel |

## ELECTRICAL CHARACTERISTICS( $T_A=25^\circ\text{C}$ )


| Parameter                            | Symbol        | Min. | Typ  | Max. | Unit          | Conditions  |
|--------------------------------------|---------------|------|------|------|---------------|---|
| Collector-base breakdown voltage     | $BV_{CBO}$    | 30   | -    | -    | V             | $I_C=10\mu\text{A}$   |
| Collector-emitter breakdown voltage  | $BV_{CEO}$    | 18   | -    | -    | V             | $I_C=1\text{mA}$  |
| Emitter-base breakdown voltage       | $BV_{EBO}$    | 3    | -    | -    | V             | $I_E=10\mu\text{A}$   |
| Collector cutoff current             | $I_{CBO}$     | -    | -    | 0.5  | $\mu\text{A}$ | $V_{CB}=10\text{V}$   |
| Emitter cutoff current               | $I_{EBO}$     | -    | -    | 0.5  | $\mu\text{A}$ | $V_{EB}=2\text{V}$  |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | -    | -    | 0.5  | V             | $I_C/I_B=20\text{mA}/4\text{mA}$  |
| DC current transfer ratio            | $h_{FE}$      | 56   | -    | 180  | -             | $V_{CE}/I_C=10\text{V}/10\text{mA}$   |
| Transition frequency                 | $f_T$         | 600  | 1500 | -    | MHz           | $V_{CB}=10\text{V}$ , $I_C=10\text{mA}$ , $f=200\text{MHz}$                 |
| Output capacitance                   | $C_{ob}$      | -    | 0.9  | 1.5  | pF            | $V_{CB}=10\text{V}$ , $I_E=0\text{A}$ , $f=1\text{MHz}$                     |
| Collector-base time constant         | $r_{bb'}$ Cc  | -    | 6    | 13   | ps            | $V_{CB}=10\text{V}$ , $I_C=10\text{mA}$ , $f=31.8\text{MHz}$                |
| Noise factor                         | NF            | -    | 4.5  | -    | dB            | $V_{CE}=12\text{V}$ , $I_C=2\text{mA}$ , $f=200\text{MHz}$ , $R_g=50\Omega$ |

# L2SC3837LT1G;S-L2SC3837LT1G


## SOT-23

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M,1982
2. CONTROLLING DIMENSION: INCH.

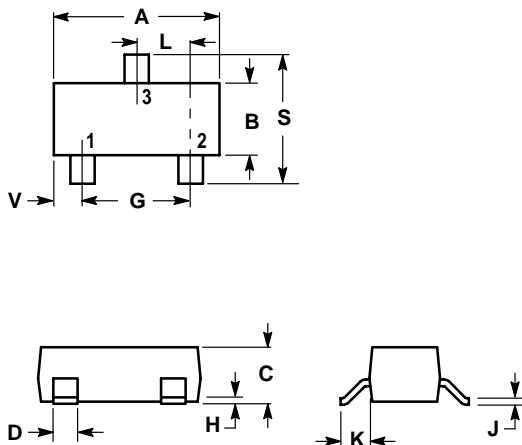

| DIM | INCHES |        | MILLIMETERS |       |
|-----|--------|--------|-------------|-------|
|     | MIN    | MAX    | MIN         | MAX   |
| A   | 0.1102 | 0.1197 | 2.80        | 3.04  |
| B   | 0.0472 | 0.0551 | 1.20        | 1.40  |
| C   | 0.0350 | 0.0440 | 0.89        | 1.11  |
| D   | 0.0150 | 0.0200 | 0.37        | 0.50  |
| G   | 0.0701 | 0.0807 | 1.78        | 2.04  |
| H   | 0.0005 | 0.0040 | 0.013       | 0.100 |
| J   | 0.0034 | 0.0070 | 0.085       | 0.177 |
| K   | 0.0140 | 0.0285 | 0.35        | 0.69  |
| L   | 0.0350 | 0.0401 | 0.89        | 1.02  |
| S   | 0.0830 | 0.1039 | 2.10        | 2.64  |
| V   | 0.0177 | 0.0236 | 0.45        | 0.60  |

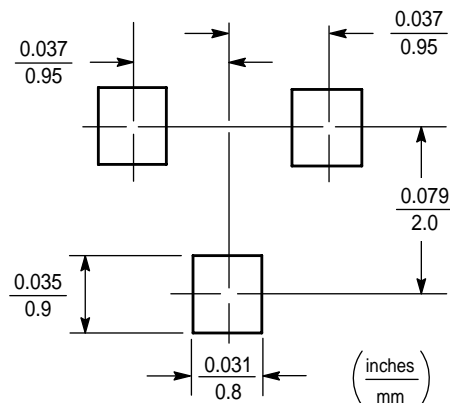

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)