

General Description

The MDS3604 uses advanced Magnachip's MOSFET Technology to provide low on-state resistance.



This device is suited for Power Management and load switching applications common in Notebook Computers and Portable Battery Packs.

Features

- $V_{DS} = -30V$
- $I_D = -12.1A$ @ $V_{GS} = -20V$
- $R_{DS(ON)}$
 $< 10.0m\Omega$ @ $V_{GS} = -20V$
 $< 12.1m\Omega$ @ $V_{GS} = -10V$
 $< 18.3m\Omega$ @ $V_{GS} = -5V$

Applications

- Load Switch
- General purpose applications
- Smart Module for Note PC Battery



Absolute Maximum Ratings ($T_a = 25^\circ C$ unless otherwise noted)

Characteristics		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	-30	V
Gate-Source Voltage		V_{GSS}	± 25	V
Continuous Drain Current ⁽¹⁾	$T_C = 25^\circ C$	I_D	-17.1	A
	$T_C = 70^\circ C$		-13.7	
	$T_A = 25^\circ C$		-12.1	
	$T_A = 70^\circ C$		-9.7	
Pulsed Drain Current		I_{DM}	-48.4	A
Power Dissipation	$T_C = 25^\circ C$	P_D	5.0	W
	$T_C = 70^\circ C$		3.2	
	$T_A = 25^\circ C$		2.5	
	$T_A = 70^\circ C$		1.6	
Single Pulse Avalanche Energy ⁽²⁾		E_{AS}	84.5	mJ
Junction and Storage Temperature Range		T_J, T_{stg}	-55~150	$^\circ C$

Thermal Characteristics

Characteristics	Symbol	Rating	Unit
Thermal Resistance, Junction-to-Ambient ⁽¹⁾	$R_{\theta JA}$	50	$^\circ C/W$
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	25	

Ordering Information

Part Number	Temp. Range	Package	Packing	Quantity	RoHS Status
MDS3604URH	-55~150°C	SOIC-8	Tape & Reel	3000 units	Halogen Free

Electrical Characteristics (T_a = 25°C unless otherwise noted)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	I _D = -250μA, V _{GS} = 0V	-30	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-1.0	-1.8	-3.0	
Drain Cut-Off Current	I _{DSS}	V _{DS} = -30V, V _{GS} = 0V	-	-	-1	μA
Gate Leakage Current	I _{GSS}	V _{GS} = ±25V, V _{DS} = 0V	-	-	±0.1	
Drain-Source ON Resistance	R _{DS(on)}	V _{GS} = -20V, I _D = -12A	-	8.6	10	mΩ
		V _{GS} = -10V, I _D = -12A	-	10	12.1	
		V _{GS} = -5V, I _D = -10A	-	14.6	18.3	
Forward Transconductance	g _{FS}	V _{DS} = -5V, I _D = -10A	-	25.5	-	S
Dynamic Characteristics						
Total Gate Charge	Q _g	V _{DS} = -15V, I _D = -12A V _{GS} = -10V	-	30.5	-	nC
Gate-Source Charge	Q _{gs}		-	5.2	-	
Gate-Drain Charge	Q _{gd}		-	7.0	-	
Input Capacitance	C _{iss}	V _{DS} = -15V, V _{GS} = 0V, f = 1.0MHz	-	1433	-	pF
Reverse Transfer Capacitance	C _{rss}		-	212	-	
Output Capacitance	C _{oss}		-	338	-	
Turn-On Delay Time	t _{d(on)}	V _{GS} = -10V, V _{DS} = -15V, R _L = 1.25Ω, R _{GEN} = 3Ω	-	15.2	-	ns
Turn-On Rise Time	t _r		-	12.9	-	
Turn-Off Delay Time	t _{d(off)}		-	50.6	-	
Turn-Off Fall Time	t _f		-	34.6	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V _{SD}	I _S = -1A, V _{GS} = 0V	-	-0.73	-1.0	V
Body Diode Reverse Recovery Time	t _{rr}	I _F = -12A, di/dt = 100A/μs	-	38.5	-	ns
Body Diode Reverse Recovery Charge	Q _{rr}		-	35.9	-	nC

Note :

- Surface mounted FR-4 board by JEDEC (jesd51-7). Continuous current at T_C=25°C is silicon limited.
- E_{AS} is tested at Starting T_J=25°C, L=1mH, I_{AS}= -13A V_{DD}=-20V, V_{GS}=-10V(100% UIL Test).

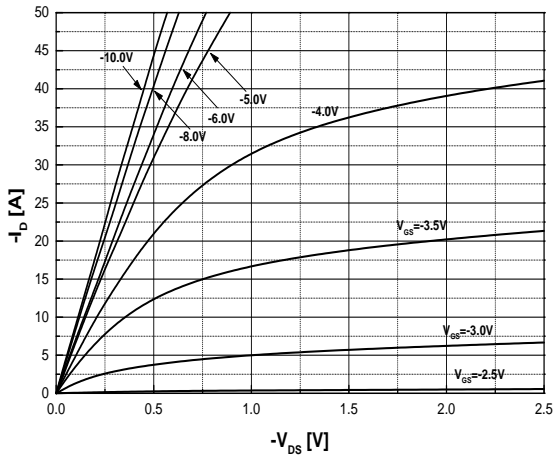


Fig.1 On-Region Characteristics

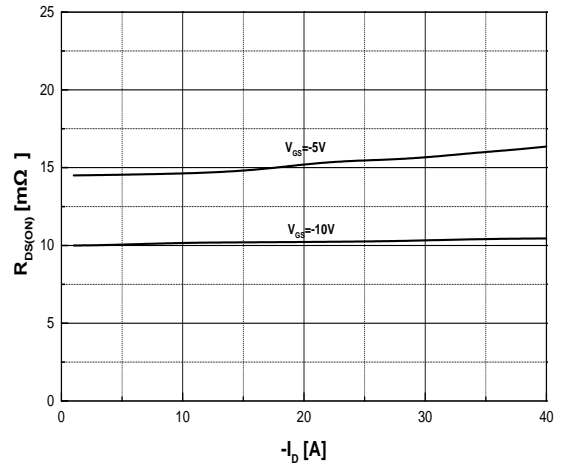


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

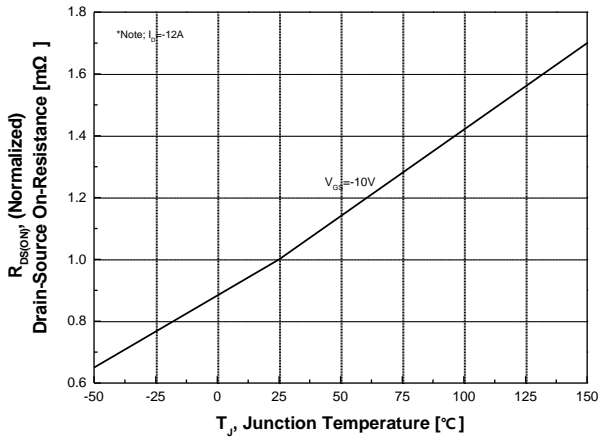


Fig.3 On-Resistance Variation with Temperature

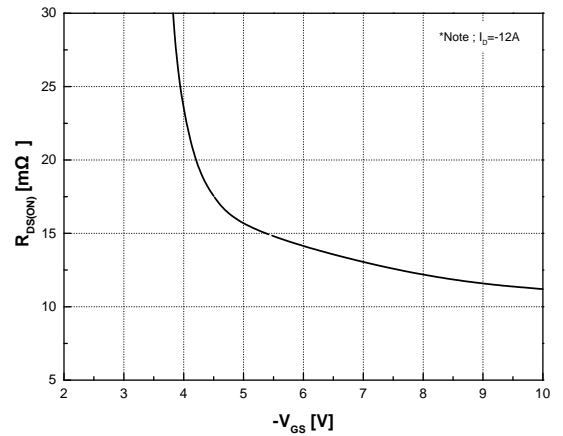


Fig.4 On-Resistance Variation with Gate to Source Voltage

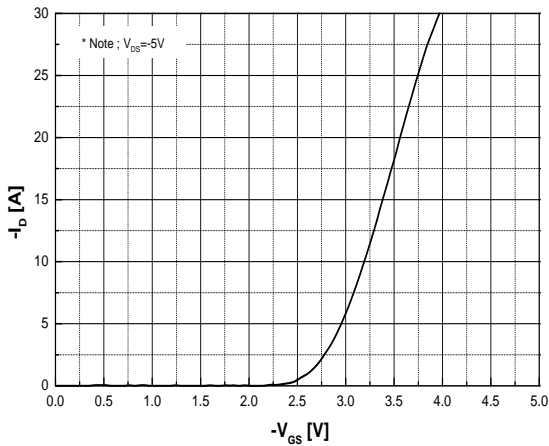


Fig.5 Transfer Characteristics

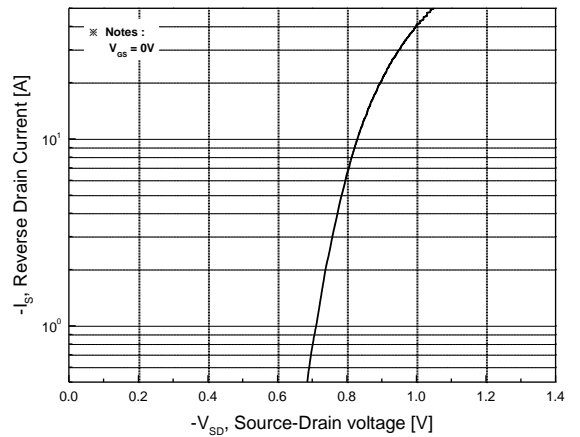


Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature

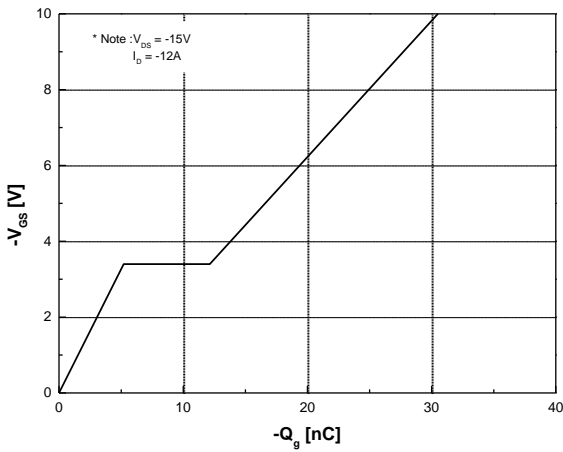


Fig.7 Gate Charge Characteristics

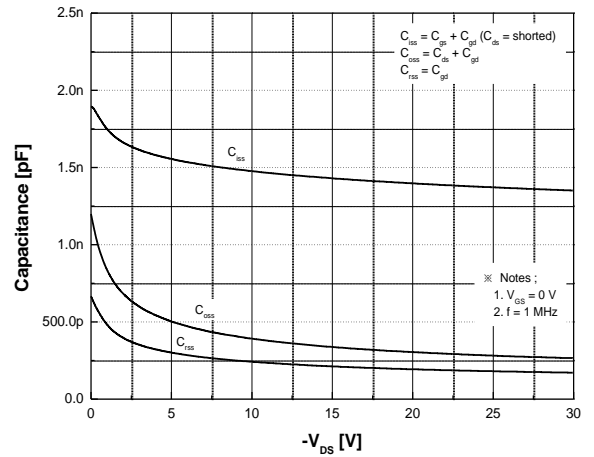


Fig.8 Capacitance Characteristics

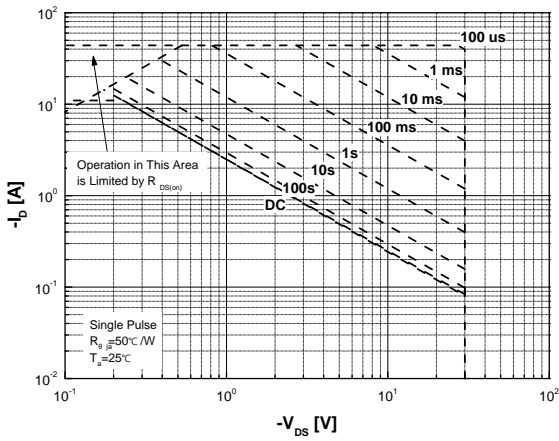


Fig.9 Maximum Safe Operating Area

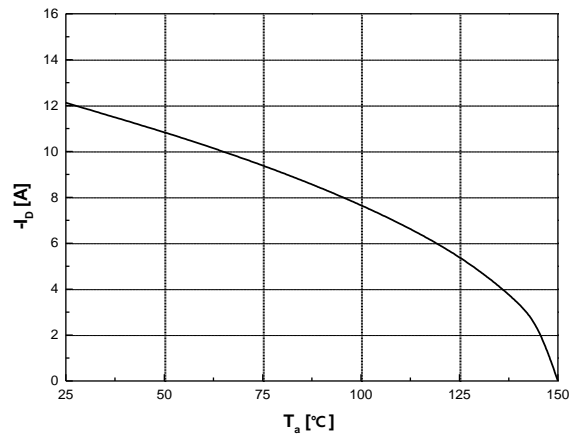


Fig.10 Maximum Drain Current vs. Ambient Temperature


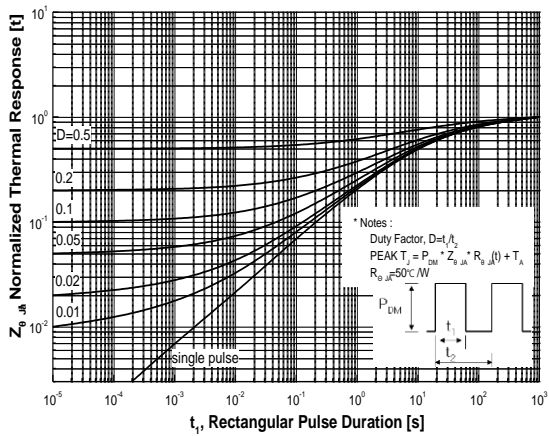


Fig.11 Transient Thermal Response Curve


Physical Dimensions

SOIC-8L

Dimensions are in millimeters unless otherwise specified

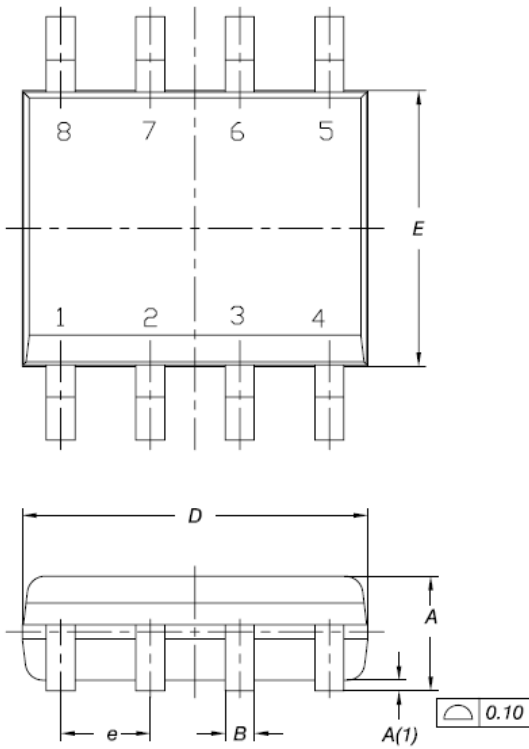


DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	1.35	1.55	1.75
A(1)	0.10	0.175	0.25
B	0.38	0.445	0.51
C	0.19	0.22	0.25
D	4.80	4.90	5.00
E	3.80	3.90	4.00
e	1.27 BSC		
H	5.80	6.00	6.20
L	0.50	0.715	0.93
α	0°	4°	8°
h	0.25	0.375	0.50

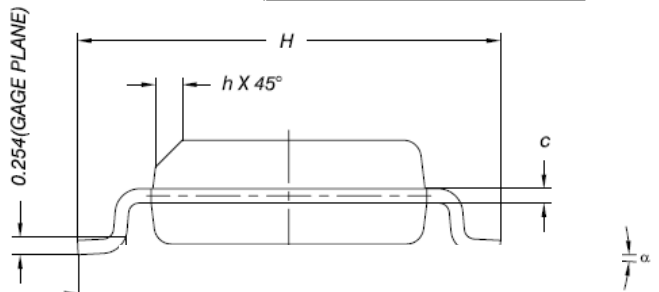

Note : Package body size, length and width do not include mold flash, protrusions and gate burrs.

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Magnachip reserves the right to change the specifications and circuitry without notice at any time. Magnachip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Magnachip product.  Magnachip is a registered trademark of Magnachip Semiconductor Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>MAGNACHIP\(美格纳\)](#)