


迈斯维内置天线 WiFi6 与5G二合一

AN_Master_A04B



机械尺寸

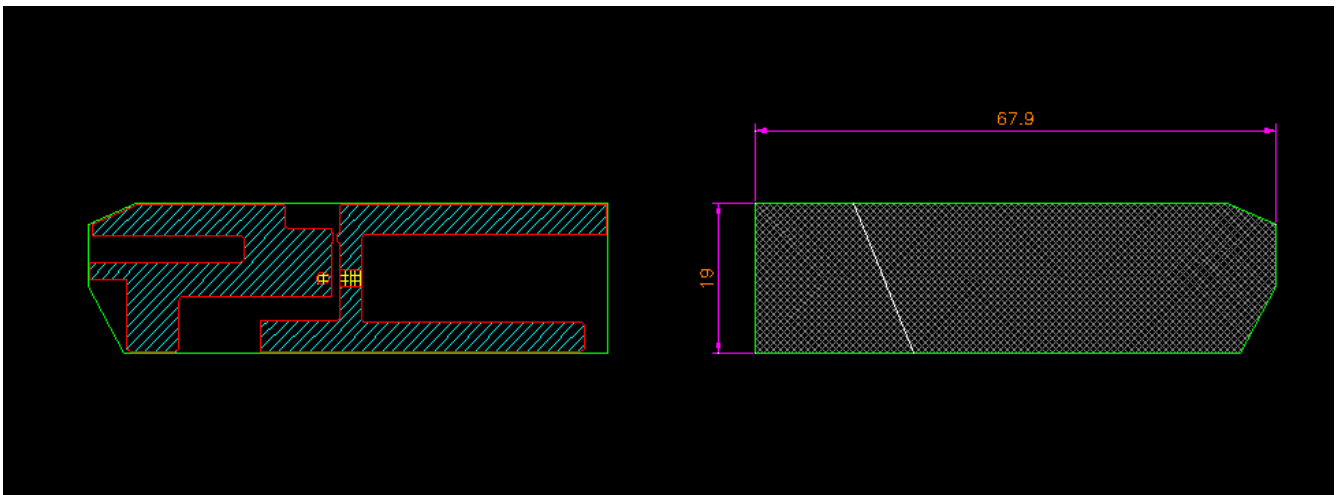

迈斯维内置天线 WiFi6 与5G二合一

AN_Master_A04B

规格

| 项目 | 规格 | |
|----|------|--------------|
| 天线 | 频率范围 | 1400~6000MHz |
| | 增益 | 3.5dBi (峰值) |
| | 效率 | >50% |
| 机械 | 尺寸 | 19*67.9mm |
| | 电缆 | RF1.13 |
| | 电缆尺寸 | 10cm |
| | 连接器 | IPEX4 |
| | 温度范围 | -20°C~+80°C |

迈斯维内置天线 WiFi6 与5G二合一

AN_Master_A04B

实测数据

| Freq (MHz) | Effi (%) |
|------------|----------|
| 1400 | 53.82 |
| 1420 | 37.52 |
| 1440 | 31.72 |
| 1460 | 28.88 |
| 1480 | 34.24 |
| 1500 | 34.89 |
| 1520 | 33.49 |
| 1540 | 39.07 |
| 1560 | 40.27 |
| 1580 | 51.05 |
| 1600 | 55.41 |
| 1620 | 67.83 |
| 1640 | 75.89 |
| 1660 | 72.57 |
| 1680 | 68.79 |
| 1700 | 72.34 |
| 1720 | 70.13 |
| 1740 | 75.41 |
| 1760 | 76.86 |
| 1780 | 74.89 |
| 1800 | 76.14 |
| 1820 | 72.08 |
| 1840 | 79.96 |
| 1860 | 76.59 |
| 1880 | 74.62 |
| 1900 | 77.58 |
| 1920 | 75.51 |

| Freq (MHz) | Effi (%) |
|------------|----------|
| 1940 | 70.87 |
| 1960 | 76.19 |
| 1980 | 75.04 |
| 2000 | 76.87 |
| 2020 | 71.18 |
| 2040 | 72.29 |
| 2060 | 74.24 |
| 2080 | 73.86 |
| 2100 | 75.27 |
| 2120 | 63.79 |
| 2140 | 59.49 |
| 2160 | 58.27 |
| 2180 | 59.73 |
| 2200 | 65.89 |
| 2220 | 66.73 |
| 2240 | 71.05 |
| 2260 | 69.82 |
| 2280 | 67.24 |
| 2300 | 66.47 |
| 2320 | 68.29 |
| 2340 | 69.82 |
| 2360 | 70.05 |
| 2380 | 68.45 |
| 2400 | 71.13 |
| 2420 | 68.54 |
| 2440 | 68.56 |
| 2460 | 69.01 |

| Freq (MHz) | Effi (%) |
|------------|----------|
| 2480 | 75.39 |
| 2500 | 81.73 |
| 2520 | 79.21 |
| 2540 | 76.7 |
| 2560 | 78.87 |
| 2580 | 78.65 |
| 2600 | 78.7 |
| 2620 | 74.36 |
| 2640 | 71.41 |
| 2660 | 73.5 |
| 2680 | 75.91 |
| 2700 | 71.16 |
| 2720 | 69.71 |
| 2740 | 67.69 |
| 2760 | 74.84 |
| 2780 | 73.56 |
| 2800 | 73.82 |
| 2820 | 70.91 |
| 2840 | 71.98 |
| 2860 | 73.71 |
| 2880 | 72.39 |
| 2900 | 75.23 |
| 2920 | 73.51 |
| 2940 | 71.43 |
| 2960 | 70.69 |
| 2980 | 78.96 |
| 3000 | 72.66 |

| Freq (MHz) | Effi (%) |
|------------|----------|
| 3000 | 71.91 |
| 3100 | 76.84 |
| 3200 | 68.92 |
| 3300 | 71.39 |
| 3400 | 67.24 |
| 3500 | 56.88 |
| 3600 | 60.91 |
| 3700 | 56.14 |
| 3800 | 50.33 |
| 3900 | 55.27 |
| 4000 | 53.41 |
| 4100 | 56.41 |
| 4200 | 53.53 |
| 4300 | 62.16 |
| 4400 | 58.16 |
| 4500 | 66.29 |
| 4600 | 60.82 |
| 4700 | 62.33 |
| 4800 | 61.46 |
| 4900 | 53.09 |
| 5000 | 49.03 |
| 5100 | 53.2 |
| 5200 | 55.48 |
| 5300 | 64.65 |
| 5400 | 70.77 |
| 5500 | 69.43 |
| 5600 | 62.97 |
| 5700 | 65.19 |
| 5800 | 68.92 |
| 5900 | 66.48 |
| 6000 | 72.53 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Maswell\(迈斯维\)](#)