


### **Features**

- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix
- designates RoHS Compliant. See ordering information)
- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

## **Applications**


- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper





Note:1. High Temperature Solder Exemptions Applied, See EU Directive Annex 7a.

# 400 Amp FRED Modules 400 Volts

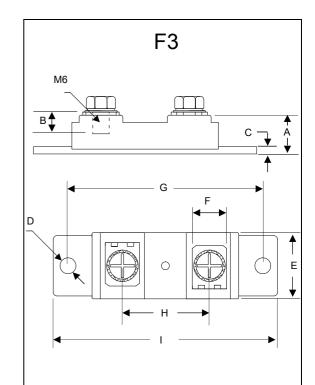

DIM	INCHES		MM		NOTE	
	MIN	MAX	MIN	MAX	NOIL	
Α	0.618	0.642	15.50	16.50		
В	0.343	0.366	8.50	9.50		
С	0.118	0.130	2.80	3.50		
D	0.256		6.50			
Е	1.051	1.075	26.50	27.50		
F	0.539	0.563	13.50	14.50		
G	3.138	3.161	79.50	80.50		
Н	1.366	1.390	34.50	35.50		
ı	3.610	3.634	91.50	92.50		



# **Maximum Ratings**

Symbol	Conditions	Values	Units
V <sub>R</sub>		400	V
$V_{RRM}$		400	V
	T <sub>C</sub> =125°C, Per Diode	200	Α
$I_{F(AV)}$	T <sub>C</sub> =125°C, Per Moudle	400	Α
	T <sub>C</sub> =125°C, 20KHz, Per Moudle	300	Α
I <sub>F(RMS)</sub>	T <sub>C</sub> =125°C, Per Diode	285	Α
_	1/2 Cycle , 50Hz, Sine	4000	Α
I <sub>FSM</sub>	1/2 Cycle , 60Hz, Sine	4500	Α
l <sup>2</sup> t	T <sub>J</sub> =45°C, t=10ms, 50Hz, Sine	80000	A <sup>2</sup> s
11	T <sub>J</sub> =45°C, t=8.3ms, 60Hz, Sine	101250	A <sup>2</sup> s
$P_{D}$		2080	W
TJ		-40 to +150	°C
T <sub>STG</sub>		-40 to +125	°C
Torque	Recommended (M6)	3~4.7	N·m
Torque	Recommended (M6)	3~4.7	N·m
Weight		92	g

# **Thermal Characteristics**

Symbol	Conditions	Values	Units
Rth(j-c)		0.06	°C/W

## **Electrical Characteristics**

Symbol	Conditions	Values			Units
Symbol	Conditions		Тур.	Max.	Ullits
I <sub>RM</sub>	V <sub>R</sub> =400V			1	mA
	V <sub>R</sub> =400V, T <sub>J</sub> =125°C			2	mA
V <sub>F</sub>	I <sub>F</sub> =200A		1.1	1.35	V
	I <sub>F</sub> =200A, T <sub>J</sub> =125°C		1.0	1.25	V
trr	$I_F=1A$ , $V_R=30V$ , $di_F/dt=-200A/\mu s$		45		ns
trr	V <sub>R</sub> =200V, I <sub>F</sub> =200A,di <sub>F</sub> /dt=-200A/µs, T <sub>J</sub> =25°C		135		ns
I <sub>RRM</sub>	V <sub>R</sub> -200V, I <sub>F</sub> -200A, αι <sub>F</sub> /αι200A/μS, I <sub>J</sub> -25 C		12		Α
trr	V =200V I =200A di /dt= 200A/va T =425°C		210		ns
I <sub>RRM</sub>	$V_R$ =200V, $I_F$ =200A, $di_F$ / $dt$ =-200A/ $\mu$ s, $T_J$ =125°C		20		Α



## **Performance Curves**

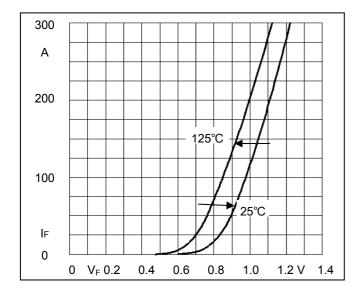


Fig1. Forward Voltage Drop vs Forward Current

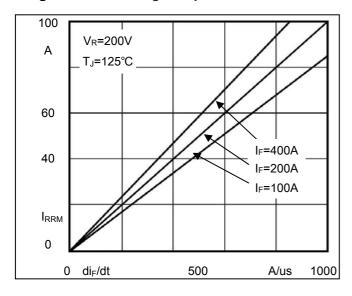


Fig3. Reverse Recovery Current vs di<sub>F</sub>/dt

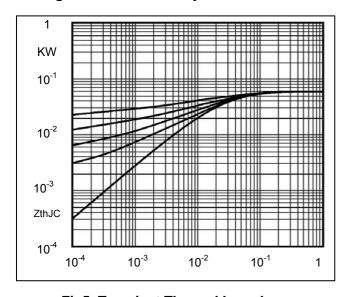


Fig5. Transient Thermal Impedance

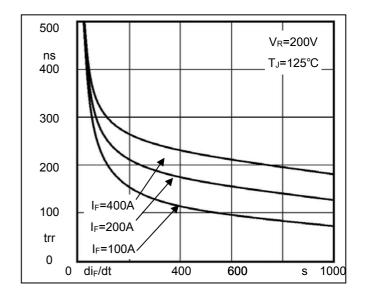


Fig2. Reverse Recovery Time vs di<sub>F</sub>/dt

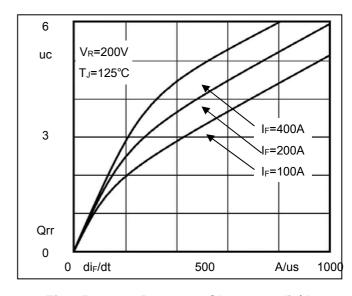


Fig4. Reverse Recovery Charge vs di<sub>F</sub>/dt



## **Ordering Information**

Device	Packing
Part Number-BP	Bulk: 10PCS/BOX ;100PCS/CTN

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp**. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp**, and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Rev.3-1-12212021

Downloaded From Oneyac.com

MCCSEMI.COM

# 单击下面可查看定价,库存,交付和生命周期等信息

# >>MCC(美微科)