

Features

- SiC MOSFET technology
- High blocking voltage with low on-resistance
- High-speed switching with low capacitances
- Halogen Free. "Green" Device (Note 1)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Maximum Ratings

- Operating Junction Temperature Range : -55°C to +175°C
- Storage Temperature Range: -55°C to +175°C
- Thermal Resistance: 0.68°C/W Junction to Case

Applications


- Solar Inverters
- Switch Mode Power Supplies
- High Voltage DC/DC Converters
- Battery Chargers
- Motor Drives

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	1200	V
Gate-Source Voltage	V_{GSmax}	-8/+22	V
Gate-Source Voltage	V_{GSop}	-4/+18	V
Continuous Drain Current	I_D	38	A
Pulsed Drain Current ⁽¹⁾	I_{DM}	80	A
Total Power Dissipation, $T_c=25^\circ\text{C}$	P_D	220	W
Total Power Dissipation, $T_c=110^\circ\text{C}$	P_D	94	W


Note:

1. Pulse Test: Pulse Width $\leq 10\mu\text{s}$, Duty Cycle $\leq 1\%$.

Internal Structure




1. Gate
2. Drain
3. Source



N-CHANNEL MOSFET

TO-247

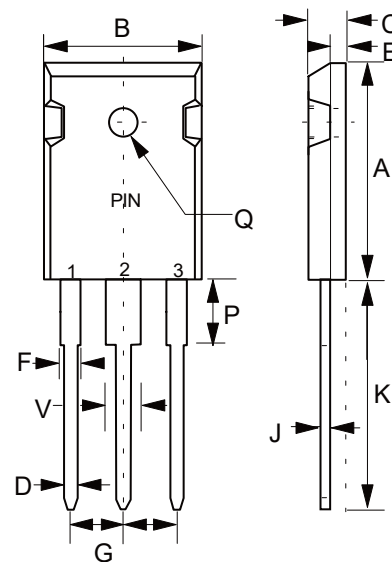

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	0.787	0.866	20.00	22.00	
B	0.598	0.638	15.20	16.20	
C	0.185	0.208	4.70	5.30	
D	0.035	0.059	0.90	1.50	
E	0.059	0.094	1.50	2.40	
F	0.067	0.091	1.70	2.30	
J	0.019	0.031	0.48	0.80	
K	0.748	0.833	19.00	21.15	
P	0.122	0.189	3.10	4.80	
Q	0.118	0.150	3.00	3.80	φ
V	0.106	0.134	2.70	3.40	
G	0.197	0.224	5.00	5.70	

Electrical Characteristics @ 25°C (Unless Otherwise Specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=100\mu A$	1200			V
Gate-Source Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=18V$			100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=1200V, V_{GS}=0V$		1	10	μA
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=5mA$	2.3	2.9	3.6	V
		$V_{DS}=V_{GS}, I_D=5mA, T_j=175^\circ C$		2.2		V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=18V, I_D=20A$		77	85	m Ω
		$V_{GS}=18V, I_D=20A, T_j=175^\circ C$		122		m Ω
Internal Gate Resistance	R_g	$f=1MHz$		1.5		Ω
Transconductance	g_{FS}	$V_{DS}=16V, I_D=20A$		10		S
		$V_{GS}=16V, I_D=20A, T_j=175^\circ C$		9.2		
Diode Characteristics						
Continuous Body Diode Current	I_S			38		A
Diode Forward Voltage	V_{SD}	$V_{GS}=-4V, I_S=10A$		3.9		V
		$V_{DS}=0V, I_{SD}=10A, T_j=175^\circ C$		3.2		V
Reverse Recovery Time	t_{rr}			28.24		ns
Reverse Recovery Charge	Q_{rr}	$V_{GS}=-4V, I_{SD}=20A, di_F/dt=2095A/\mu s$		190		nC
Peak Reverse Recovery Current	I_{rrm}			30.08		A
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS}=1000V, V_{GS}=0V, f=1MHz$		890		pF
Output Capacitance	C_{oss}			58		
Reverse Transfer Capacitance	C_{rss}			4		
Coss Stored Energy	E_{oss}			34		μJ
Total Gate Charge	Q_g	$V_{DS}=800V, V_{GS}=-4/+18V, I_D=20A$		41		nC
Gate-Source Charge	Q_{gs}			12		
Gate-Drain Charge	Q_{gd}			11		
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=800V, V_{GS}=-4/+15V, R_G=0\Omega, I_{DS}=20A$		21		ns
Turn-On Rise Time	t_r			17		
Turn-Off Delay Time	$t_{d(off)}$			14		
Turn-Off Fall Time	t_f			8		
Turn-On switching energy	E_{on}			377		μJ
Turn-Off switching energy	E_{off}			14		

Curve Characteristics

Fig. 1 - Typical Output Characteristics

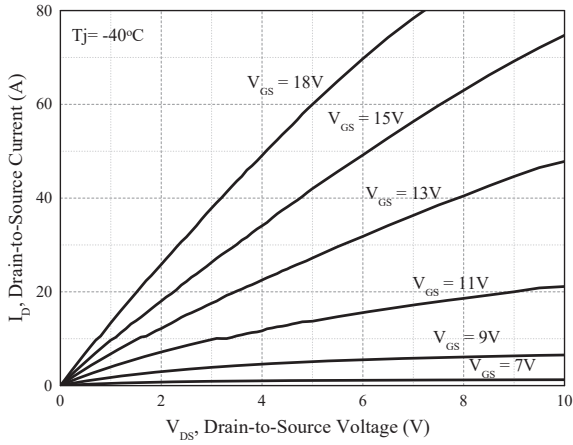


Fig. 2 - Typical Output Characteristics

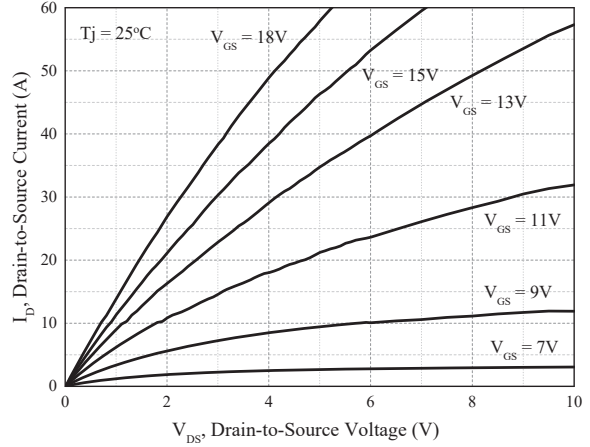


Fig. 3 - Typical Output Characteristics

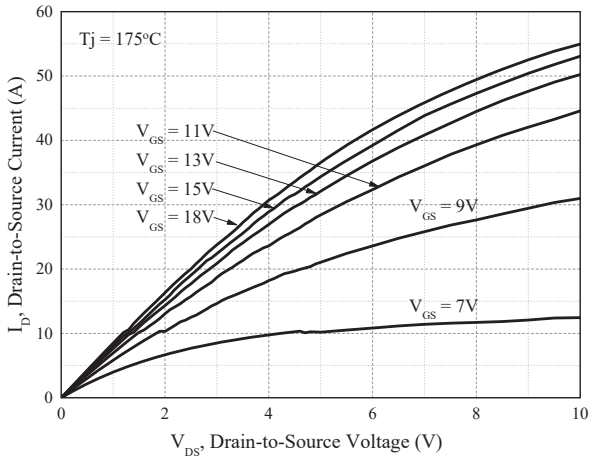


Fig. 4 - Transfer Characteristics for various junction temperature

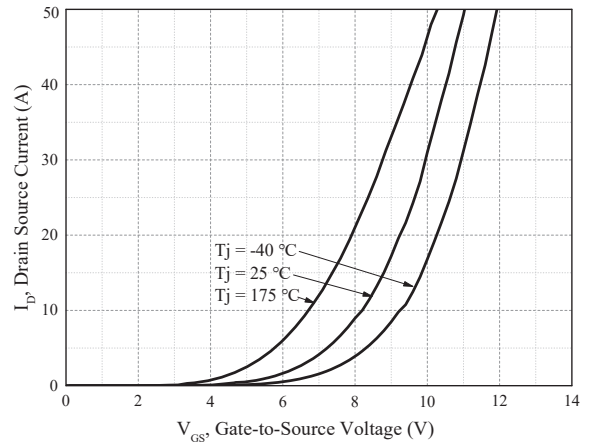


Fig. 5 - On-resistance vs temperature for various gate voltage


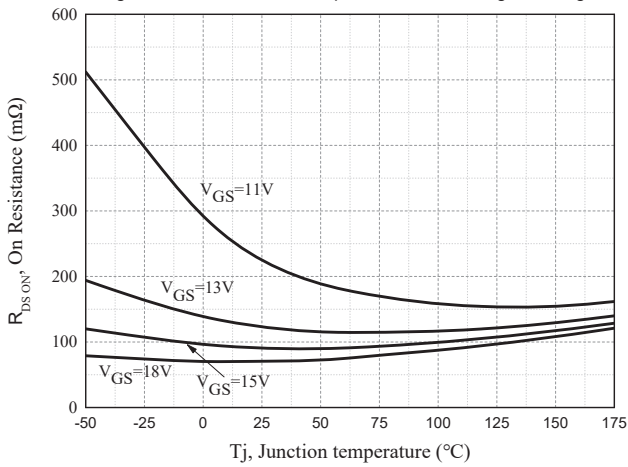


Fig. 6 - Normalized on-resistance vs temperature

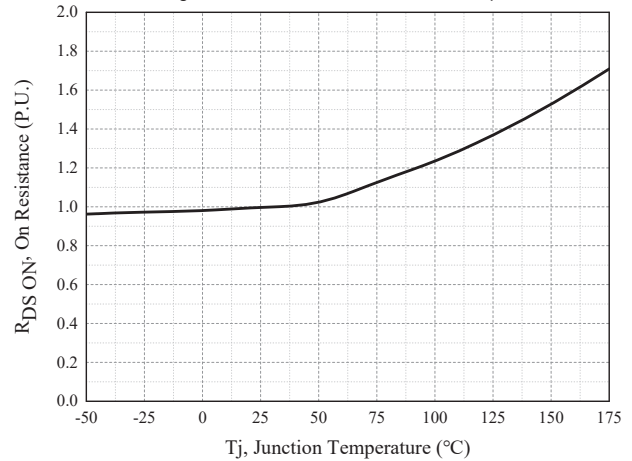

Curve Characteristics

Fig. 7 - On-resistance vs. drain current

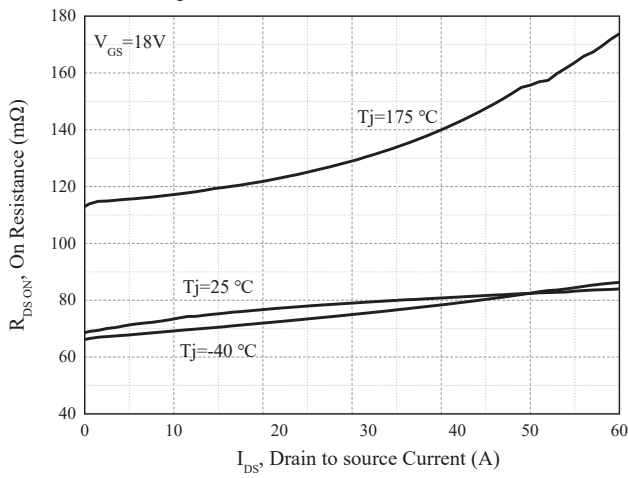


Fig. 8 - Body diode characteristic

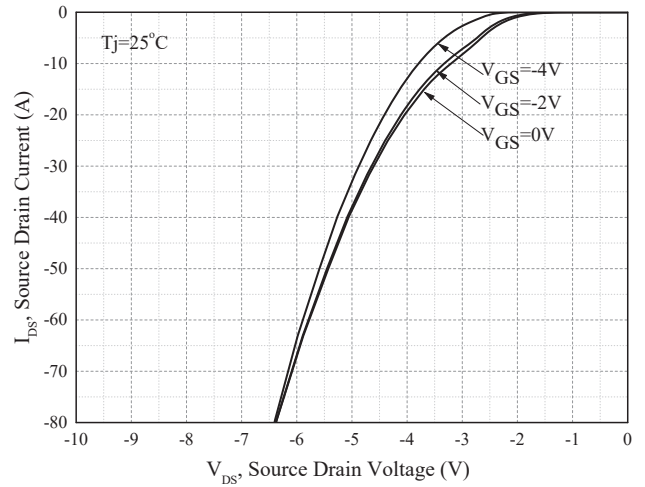


Fig. 9 - Body diode characteristic

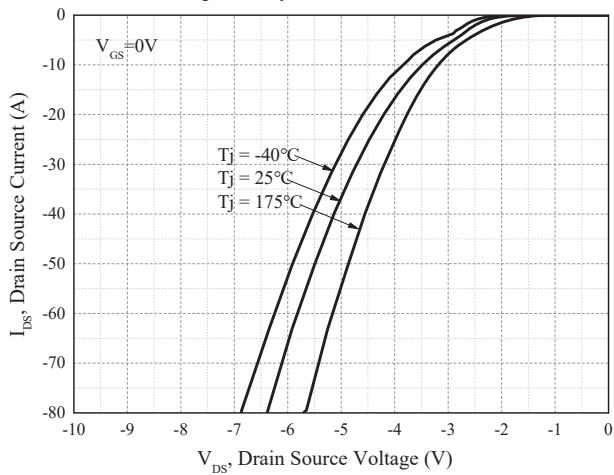


Fig. 10 - 3rd quadrant characteristic at $T_j=25^\circ\text{C}$

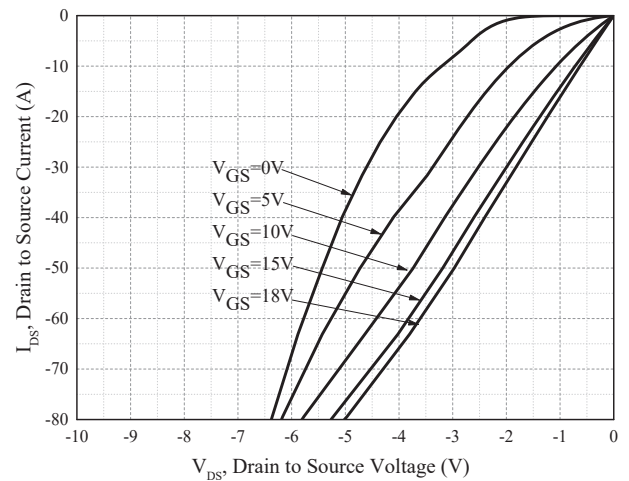


Fig. 11 - Threshold voltage vs. temperature


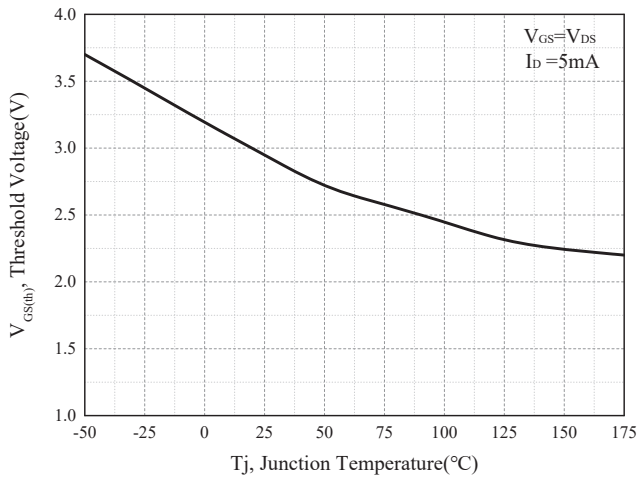


Fig. 12 - Gate charge characteristic

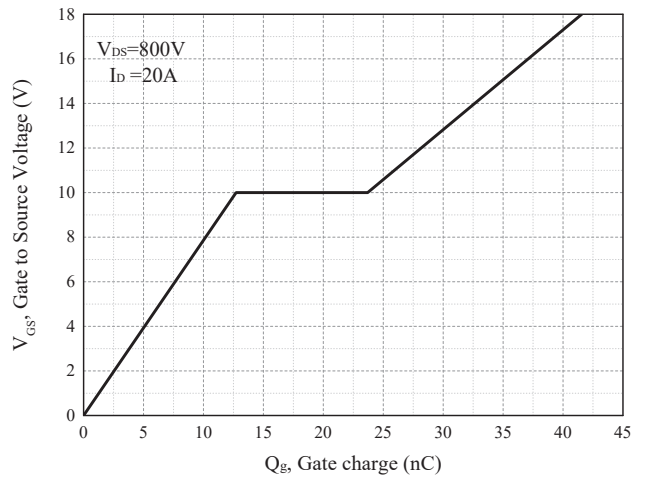

Curve Characteristics

Fig. 13 - Capacitances vs.drain source voltage (0-1000V)

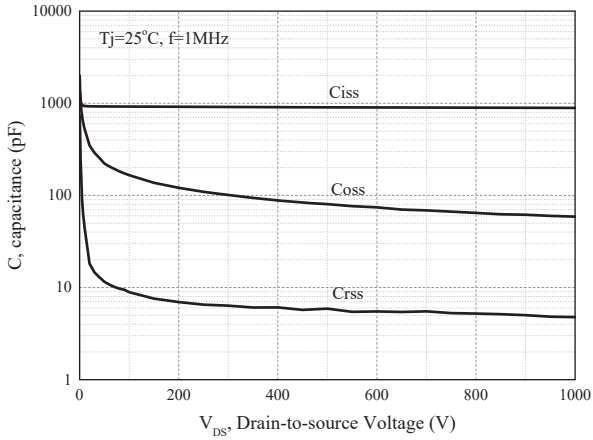


Fig. 14 - Capacitances vs.drain source voltage (0-200V)

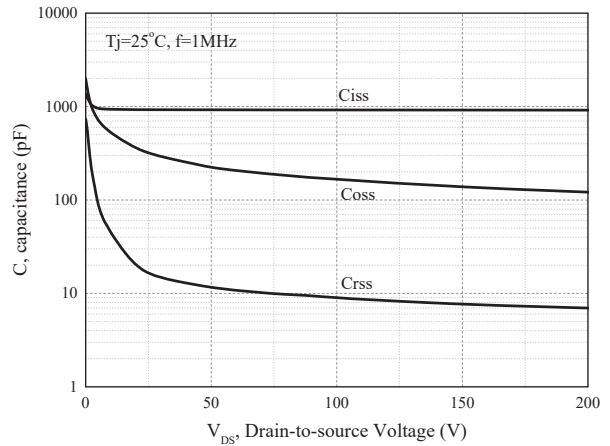


Fig. 15 - Output capacitor stored energy

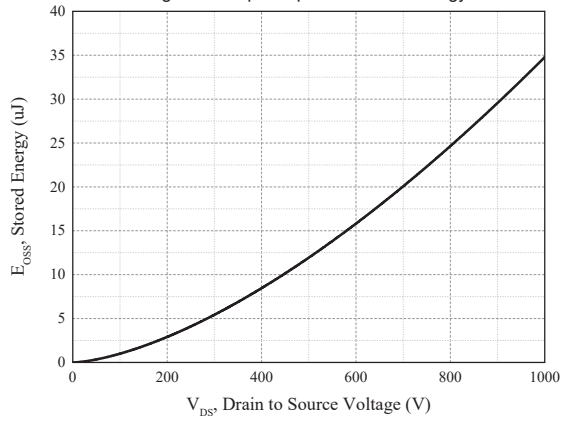


Fig. 16 - Reverse characteristics vs. Tj

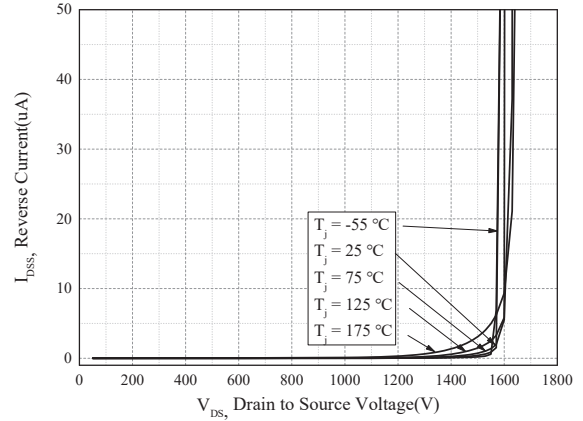


Fig. 17 - Maximum power dissipation derating vs. temperature







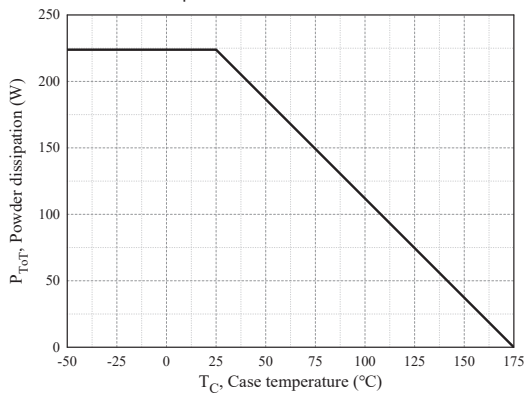


Fig. 18 - Coutinuous drain current derating vs. temperature

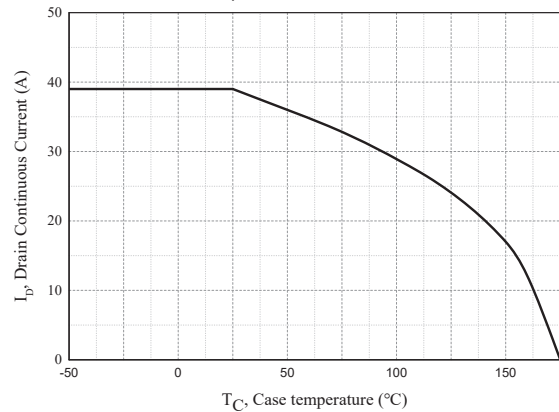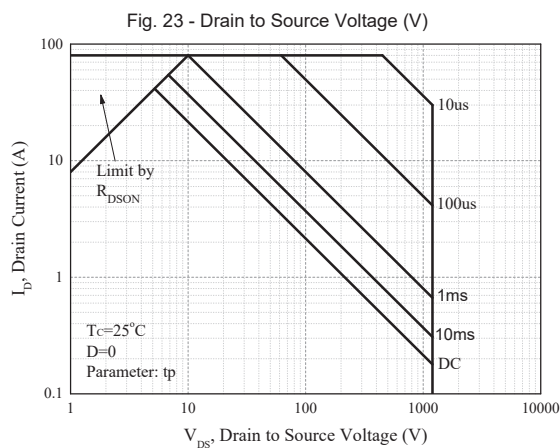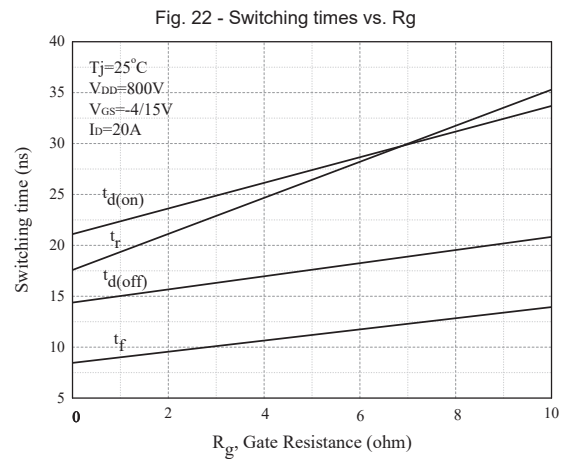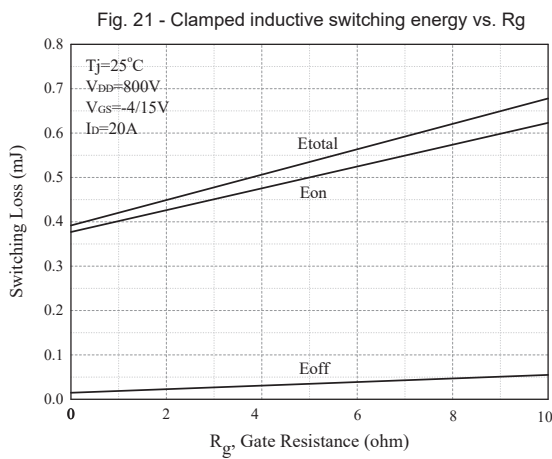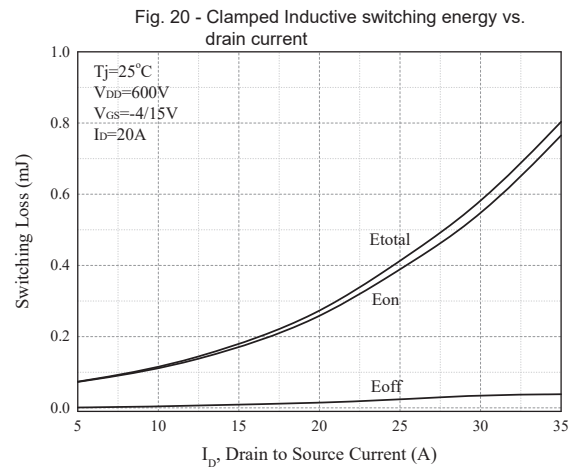

Curve Characteristics

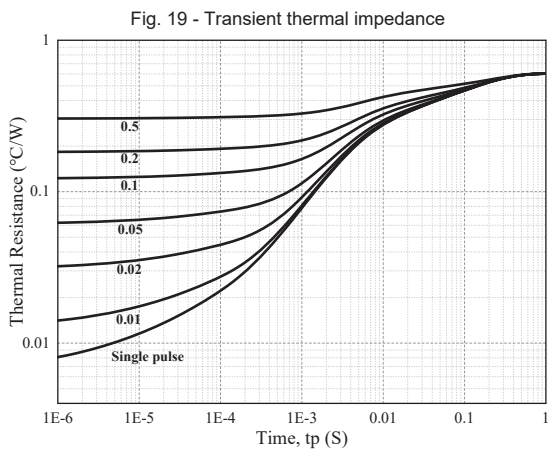

Ordering Information

Device	Packing
SICW080N120Y-BP	Tube:30pcs/Tube, 360pcs/Box, 1.8K/Ctn;

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

单击下面可查看定价，库存，交付和生命周期等信息

[>>MCC\(美微科\)](#)