


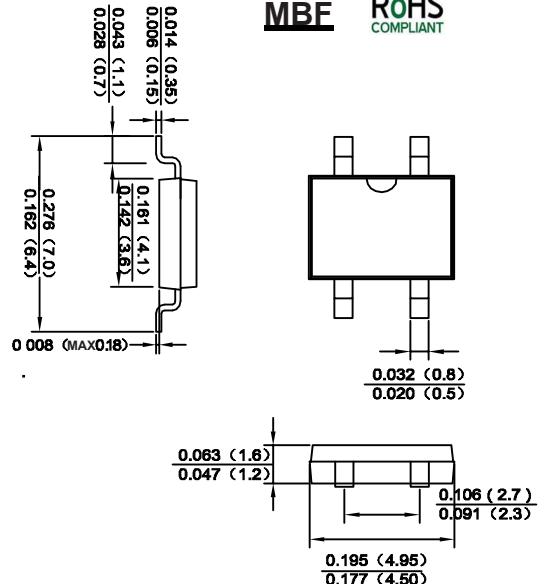

Schottky Surface Mount Flat Bridge Rectifier

Features

- ◆ Surge overload rating: 30 amperes peak
- ◆ Ideal for printed circuit board
- ◆ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Low leakage
- ◆ Reliable low cost construction utilizing molded

RoHS
COMPLIANT**Mechanical Data**

Case : JEDEC MBF Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.0026 ounce, 0.075 grams

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	KMB24F	KMB26F	KMB28F	KMB210F	KMB215F	KMB220F	UNITS
		MDD KMB24F	MDD KMB26F	MDD KMB28F	MDD KMB210F	MDD KMB215F	MDD KMB220F	
Marking Code								
Maximum repetitive peak reverse voltage	V _{RRM}	40	60	80	100	150	200	V
Maximum RMS voltage	V _{RMS}	28	42	56	70	105	140	V
Maximum DC blocking voltage	V _{DC}	40	60	80	100	150	200	V
Maximum average forward rectified current	I _{F(AV)}				2.0			A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}			40				A
Maximum instantaneous forward voltage per at 2A	V _F	0.55	0.70	0.85		0.90		V
Maximum DC reverse current Ta=25°C at rated DC blocking voltage Ta=100°C	I _R		0.5 10		0.3 5			mA mA
Typical thermal resistance	R _{θJA} R _{θJL}			75 20				°C/W
Typical junction capacitance	C _J	220		80				pF
Operating temperature range	T _J			-55 to +150				°C
storage temperature range	T _{STG}			-55 to +150				°C

NOTE:1.Measured at 1MHz and applied reverse voltage of 4 V D.C.

2.Mounted on glass epoxy PC board with 4 X (5X5mm) copper pad.



Ratings And Characteristic Curves

Fig.1 Forward Current Derating Curve

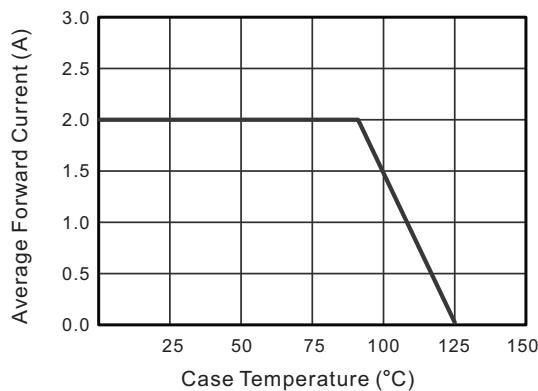


Fig.2 Typical Reverse Characteristics

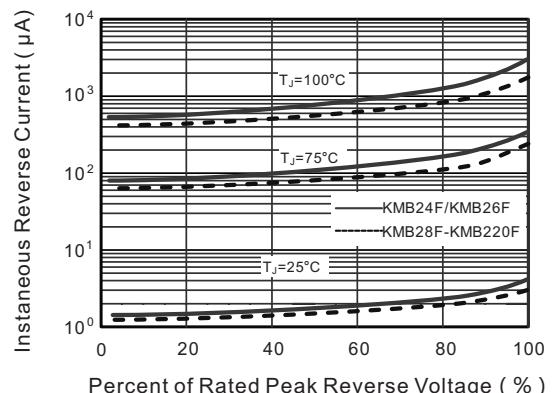


Fig.3 Typical Forward Characteristic

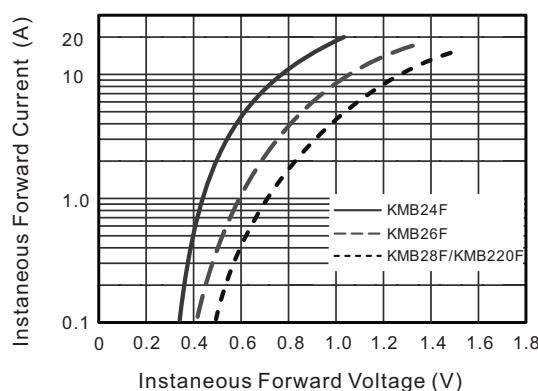


Fig.4 Typical Junction Capacitance

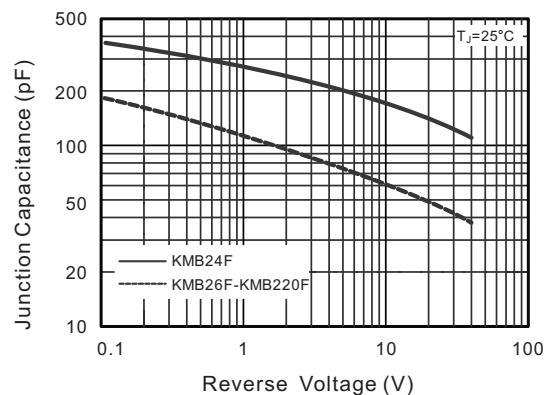


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


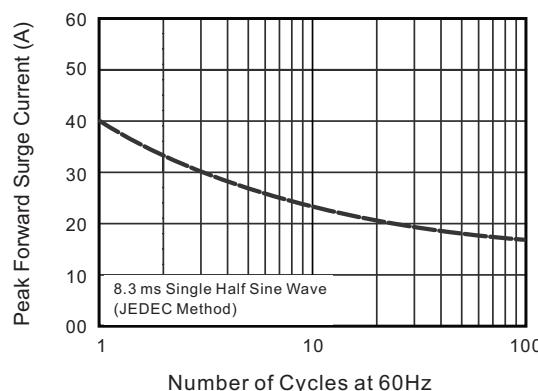


Fig.6- Typical Transient Thermal Impedance



The curve above is for reference only.

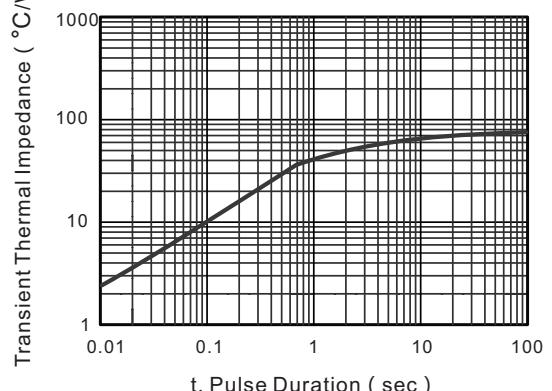

电子元器件线上授权代理开拓者
原厂授权 · 正品现货 · 一件即发

单击下面可查看定价，库存，交付和生命周期等信息

[>>MDD\(辰达行\)](#)