



# PRODUCT SPECIFICATION

## TABLE OF CONTENTS

- 1.0 SCOPE
- 2.0 PRODUCT DESCRIPTION
- 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS
- 4.0 RATINGS
- 5.0 PERFORMANCE
- 6.0 PROCESSING GUIDELINES

### 1.0 SCOPE


This Product Specification covers the 1.0mm pitch board-to-board plug and receptacle connectors.

### 2.0 PRODUCT DESCRIPTION


2.1 The 71436 plug and the 71439 receptacle connectors have been designed in accordance with EIA standard 700 AAAB for 1.0mm two-part connectors for use with parallel printed boards.

2.1.1 All 1.0mm connectors are available with or without locating pegs.

2.1.2 All 1.0mm connectors can be supplied with a vacuum cap for robotic placement.

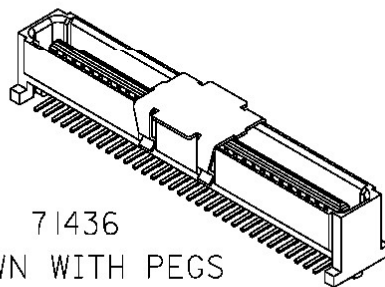

71436  
SHOWN WITH PEGS  
AND VACUUM CAP

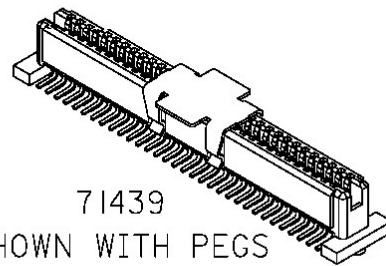

71439  
SHOWN WITH PEGS  
AND VACUUM CAP

|  |   |  |                                     |
|--|---|--|-------------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: <b>UCP2008-0856</b><br>DATE: <b>2007/10/15</b> | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm<br/>BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>1 of 7</b>          |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                                   | CHECKED BY:<br><b>Bob Barker</b>   | APPROVED BY:<br><b>Steve Miller</b> |

TEMPLATE FILENAME: PRODUCT\_SPEC(SIZE\_A)(V.1).DOC



# PRODUCT SPECIFICATION

## 2.0 PRODUCT DESCRIPTION (CONT'D)

2.2 Product Name and Item Numbers  
See figure 1 and table 1.

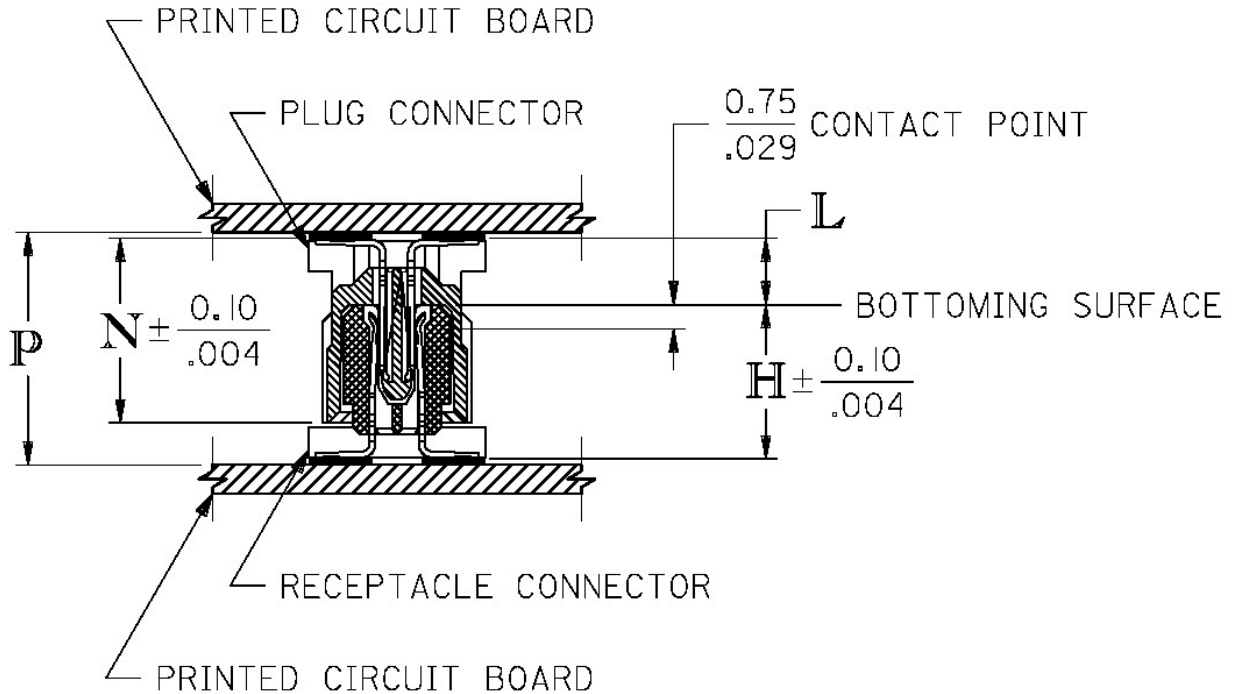


Figure 1

| PLUG CONNECTOR |           |           | RECEPTACLE CONNECTOR |            | STACK HEIGHT<br>DIMENSION P<br>+0.00/-0.40 mm<br>+.000/-0.16 Inch |
|----------------|-----------|-----------|----------------------|------------|---|
| ITEM NO.       | DIM. N    | DIM. L    | ITEM NO.             | DIM. H     |   |
| 71436-0***     | 6.35/.250 | 2.30/.090 | 71439-0***           | 5.30/.209  | 8.00/.315   |
| 71436-1***     | 7.35/.289 | 3.30/.130 | 71439-0***           | 5.30/.209  | 9.00/.354   |
| 71436-2***     | 8.35/.329 | 4.30/.169 | 71439-0***           | 5.30/.209  | 10.00/.394  |
| 71436-1***     | 7.35/.289 | 3.30/.130 | 71439-1***           | 7.30/.287  | 11.00/.433  |
| 71436-2***     | 8.35/.329 | 4.30/.169 | 71439-1***           | 7.30/.287  | 12.00/.472  |
| 71436-2***     | 8.35/.329 | 4.30/.169 | 71439-2***           | 8.30/.327  | 13.00/.512  |
| 71436-1***     | 7.35/.289 | 3.30/.130 | 71439-3***           | 10.30/.406 | 14.00/.551  |
| 71436-2***     | 8.35/.329 | 4.30/.169 | 71439-3***           | 10.30/.406 | 15.00/.591  |

Table 1

|  |   |  |                                     |
|--|---|--|-------------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: <b>UCP2008-0856</b><br>DATE: <b>2007/10/15</b> | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm<br/>BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>2 of 7</b>          |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                                   | CHECKED BY:<br><b>Bob Barker</b>   | APPROVED BY:<br><b>Steve Miller</b> |

TEMPLATE FILENAME: PRODUCT\_SPEC(SIZE\_A)(V.1).DOC



# PRODUCT SPECIFICATION

## 2.3 Dimensions, Materials, and Platings:

See appropriate sales drawings for information on dimensions, materials, and platings.

## 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

3.1 See sales drawings and other sections of this specification for necessary referenced documents and specifications.

3.2 Recognized Agency Approvals:

3.2.1 Underwriters Laboratories Inc.: File Number E29179

## 4.0 RATINGS

### 4.1 VOLTAGE

250Volts AC (RMS) (contact to contact)

### 4.2 CURRENT (30°C Temperature rise)

0.5 Amps maximum, all circuits wired in series ; 1.0 Amps maximum, five adjacent circuits wired in series

### 4.3 TEMPERATURE

Operating: - 55°C to + 85°C

## 5.0 PERFORMANCE

### 5.1 ELECTRICAL REQUIREMENTS

| ITEM | DESCRIPTION                               | TEST CONDITION  | REQUIREMENT                                 |
|------|---|---|---|
| 1    | <b>Contact Resistance (Low Level)</b>     | Mate connectors, measure by dry circuit: apply a maximum voltage of <b>20</b> mV and a current of <b>10</b> mA. | <b>30</b> milliohms<br>MAXIMUM<br>[initial] |
| 2    | <b>Contact Resistance @ Rated Current</b> | Mate connectors: apply a maximum voltage of <b>20</b> mV at rated current.                                      | <b>15</b> milliohms<br>MAXIMUM<br>[initial] |
| 3    | <b>Insulation Resistance</b>              | Apply 250±50 VDC, measure resistance between adjacent terminals.  | <b>100</b> megaohms<br>MINIMUM              |
| 4    | <b>Dielectric Withstanding Voltage</b>    | Apply 250VAC for 1 minute between adjacent terminals.   | No breakdown;                               |

|  |   |  |                                  |
|--|---|--|----------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: <b>UCP2008-0856</b><br>DATE: <b>2007/10/15</b> | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>3 of 7</b>       |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> |   | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                                | CHECKED BY:<br><b>Bob Barker</b> |
|  |   | APPROVED BY:<br><b>Steve Miller</b>  |                                  |

TEMPLATE FILENAME: PRODUCT\_SPEC(SIZE\_A)(V.1).DOC



# PRODUCT SPECIFICATION

## 5.2 MECHANICAL REQUIREMENTS

| ITEM | DESCRIPTION                             | TEST CONDITION  | REQUIREMENT   |
|------|---|---|---|
| 5    | <b>Terminal Retention Force</b>         | Apply axial force on terminal in housing at rate of 25±6mm (1 ± ¼ inch) per minute.                                     | 3.9 N (0.4 Kgf)<br>MINIMUM retention force  |
| 6    | <b>Connector Mate and Unmate Forces</b> | Mate and unmate connectors (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.                             | Mate Force:<br>60g X no. of circuits maximum<br>&<br>Un-Mate Force:<br>23g X no. of circuits, minimum |
| 7    | <b>Durability</b>                       | Mate connectors up to 100 cycles at a maximum rate of 10mm (0.40in) per second; rest 30 seconds minimum (when unmated). | Maximum contact resistance change:<br>15 milliohms  |
| 8    | <b>Vibration (Random)</b>               | Amplitude: 1.9mm (.076in) peak-to-peak; Sweep: 10-55-10 Hz in one minute; Duration: 2 hours in each axis x, y and z.    | Maximum contact resistance change:<br>15 milliohms<br>&<br>Discontinuity < 1 microsecond              |
| 10   | <b>Shock (Mechanical)</b>               | 490 m/s <sup>2</sup> (50g) peak saw-tooth, 11 milliseconds duration; one shock each direction in each axis x, y and z.  | Maximum contact resistance change:<br>15 milliohms<br>&<br>Discontinuity < 1 microsecond              |

## 5.3 ENVIRONMENTAL REQUIREMENTS

| ITEM                  | DESCRIPTION               | TEST CONDITION   | REQUIREMENT  |                           |           |    |            |    |  |
|-----------------------|---------------------------|--|--|---------------------------|-----------|----|------------|----|--|
| 11                    | <b>Shock (Thermal)</b>    | Mate connectors; expose to 5 cycles of:<br><table border="1"> <tr> <td><u>Temperature °C</u></td> <td><u>Duration (Minutes)</u></td> </tr> <tr> <td>-40 +0/-3</td> <td>30</td> </tr> <tr> <td>+105 +3/-0</td> <td>30</td> </tr> </table> | <u>Temperature °C</u>  | <u>Duration (Minutes)</u> | -40 +0/-3 | 30 | +105 +3/-0 | 30 | Maximum contact resistance change:<br>15 milliohms<br>&<br>Visual: No Damage |
| <u>Temperature °C</u> | <u>Duration (Minutes)</u> |  |  |                           |           |    |            |    |  |
| -40 +0/-3             | 30                        |  |  |                           |           |    |            |    |  |
| +105 +3/-0            | 30                        |  |  |                           |           |    |            |    |  |
| 12                    | <b>Thermal Aging</b>      | Mate connectors; expose to:<br>250 hours at 85 ± 2°C   | Maximum contact resistance change:<br>15 milliohms<br>&<br>Visual: No Damage |                           |           |    |            |    |  |

|  |   |  |                                     |
|--|---|--|-------------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: UCP2008-0856<br>DATE: 2007/10/15 | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>4 of 7</b>          |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                     | CHECKED BY:<br><b>Bob Barker</b>   | APPROVED BY:<br><b>Steve Miller</b> |

TEMPLATE FILENAME: PRODUCT\_SPEC(SIZE\_A)(V.1).DOC



# PRODUCT SPECIFICATION

## 5.3 ENVIRONMENTAL REQUIREMENTS (continued)

| ITEM | DESCRIPTION                             | TEST CONDITION   | REQUIREMENT  |
|------|---|--|--|
| 27   | Humidity<br>(Steady State)              | Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 240 hours.<br>Per MIL-STD-202F, Method 103B, Test Condition A.                         | Maximum contact resistance change:<br>15 milliohms<br>&<br>Visual: No Damage                         |
| 28   | Humidity<br>(Cyclic)                    | Test mated connectors per MIL-STD-202F, Method 106E, excluding steps 7a and 7b.  | Maximum contact resistance change:<br>15 milliohms<br>&<br>Visual: No Damage                         |
| 30   | Temperature Rise<br>and Current Cycling | Measure Temperature rise of mated connectors at rated current after 96 hours, then after 45 minutes ON, 15 minutes OFF for 240 hours, and finally after 96 hours at rated current. | Maximum Temperature rise:<br>30°C over ambient<br>Maximum contact resistance change:<br>15 milliohms |
| 36   | Mixed Flowing Gas                       | Environmental Class II, 7 days unmated.  | Maximum contact resistance change:<br>15 milliohms   |

## 6.0 PROCESSING GUIDELINES

| <u>PROCESSING STEPS</u>      | <u>RECOMMENDATION</u>   | <u>COMMENTS</u>                |
|------------------------------|---|--------------------------------|
| Resistance to Soldering Heat | Peak soldering temperature to be 265 degrees C.<br>Maximum time within 5 degrees of peak temperature to be 40 seconds.<br><br>Note: Connectors must be dried for 8 hours @ 70°C prior to processing at temperatures over 245°C. Connectors may be left in the tape and reel or tubes during the drying operation. | Appearance: No Physical Damage |


|  |   |  |                                     |
|--|---|--|-------------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: UCP2008-0856<br>DATE: 2007/10/15 | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>5 of 7</b>          |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                     | CHECKED BY:<br><b>Bob Barker</b>   | APPROVED BY:<br><b>Steve Miller</b> |

TEMPLATE FILENAME: PRODUCT\_SPEC(SIZE\_A)(V.1).DOC




# PRODUCT SPECIFICATION

MATED ENVIRONMENTAL  
AND MECHANICAL

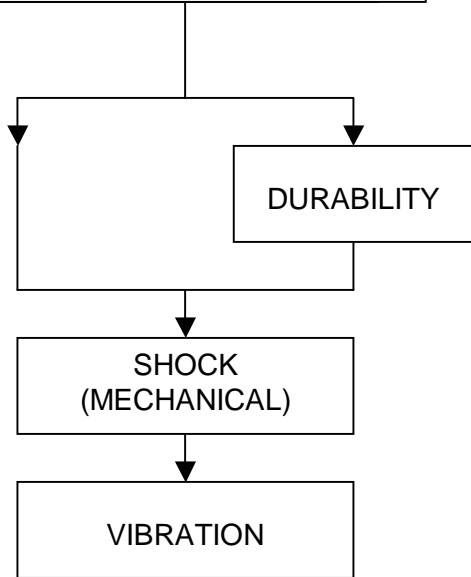

MATED ENVIRONMENTAL


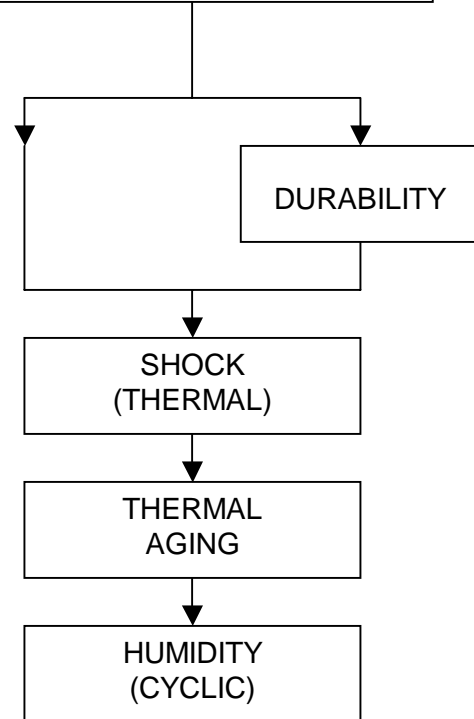


|  |   |  |                                     |
|--|---|--|-------------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: <b>UCP2008-0856</b><br>DATE: <b>2007/10/15</b> | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm<br/>BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>6 of 7</b>          |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                                   | CHECKED BY:<br><b>Bob Barker</b>   | APPROVED BY:<br><b>Steve Miller</b> |

TEMPLATE FILENAME: PRODUCT\_SPEC(SIZE\_A)(V.1).DOC



# PRODUCT SPECIFICATION

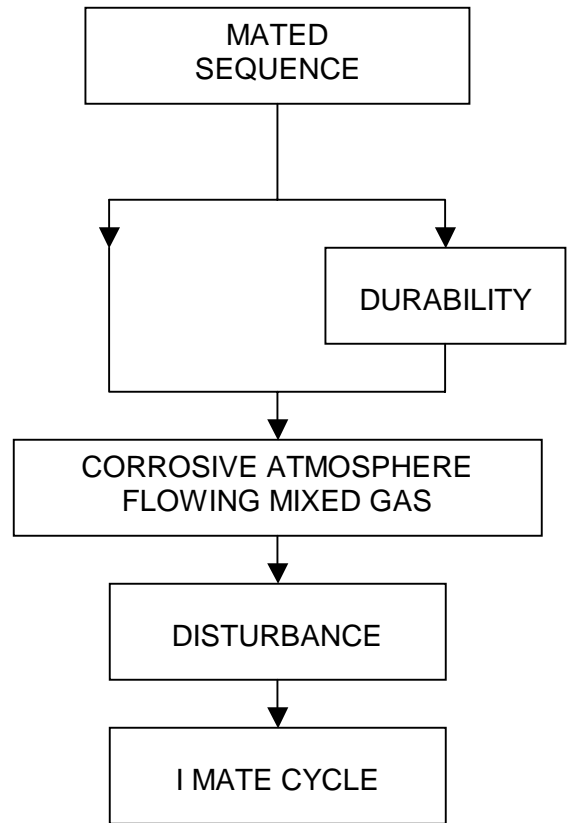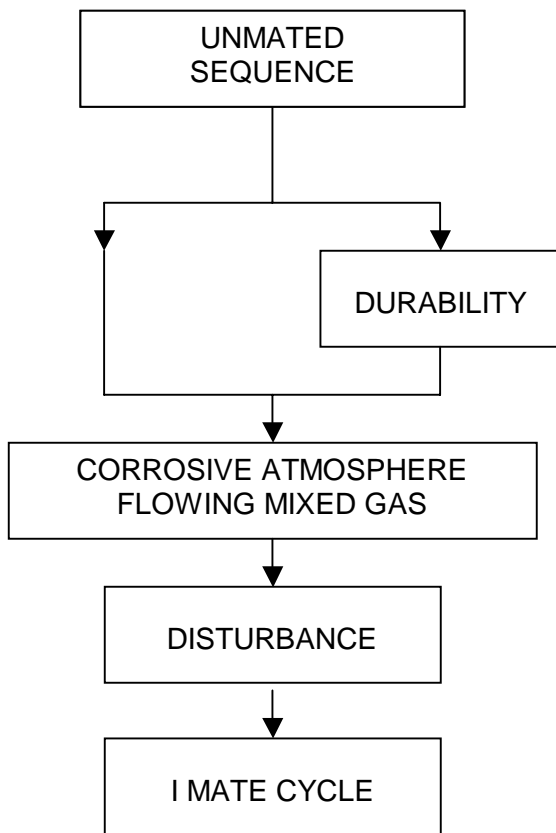

|  |   |  |                                     |
|--|---|--|-------------------------------------|
| REVISION:<br><b>F</b>                    | EGR/ECN INFORMATION:<br>EC No: <b>UCP2008-0856</b><br>DATE: <b>2007/10/15</b> | TITLE:<br><b>PRODUCT SPECIFICATION FOR 1.0mm BOARD-TO-BOARD CONNECTORS</b> | SHEET No.<br><b>7 of 7</b>          |
| DOCUMENT NUMBER:<br><b>PS-71436-9999</b> | CREATED / REVISED BY:<br><b>Marc Ibarra</b>                                   | CHECKED BY:<br><b>Bob Barker</b>   | APPROVED BY:<br><b>Steve Miller</b> |

单击下面可查看定价，库存，交付和生命周期等信息

[>>MOLEX](#)