
产品编号： 473521001

Product Description： 1.10mm Pitch microSD Card Connector, Push-Push Type, with VSS (Supply Voltage Ground) Detect Switch, Lead-Free

系列号： 47352

Status： Active

Product Category： Memory / SIM Card Connectors

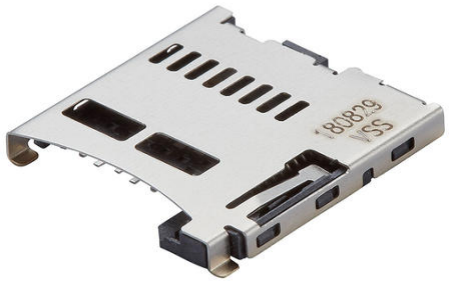

文件和资源

图纸

473521001_sd.pdf

PK-47352-101-001.pdf

3D 模型和设计文件

473521001_stp.zip

规格

PS-47334-001-001.pdf

TS-47334-001-008.pdf

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Compliant per EU 2015/863

合规声明

- EU RoHS
- REACH SVHC
- Low-Halogen

行业文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Downloaded From Oneyac.com

关注物质

- PFAS

欧盟 RoHS 合格证书

附加信息

产品详情

一般

状态	Active
类别	Memory / SIM Card Connectors
系列	47352
说明	1.10mm Pitch microSD Card Connector, Push-Push Type, with VSS (Supply Voltage Ground) Detect Switch, Lead-Free
注解	Push-Push Type; With VSS Detect Switch
产品名称	microSD Card
类型	Push-Push
UPC	822350373722

机构

CSA	LR19980
UL	E29179

电气

每触点最大电流	0.5A
屏蔽	Yes
电压 - 最大	100V DC

物理

卡片探测开关	Open
插卡位置	Front
回路数（已载入）	8
电路数（最多）	8
颜色-树脂	Black
耐用性(插拔次数) - 最多次数	5000
弹出器按钮端	N/A
阻燃性	94V-0
材料 - 触头	Copper Alloy
材料 - 接合部位电镀	Gold
材料 - 终端电镀	Tin
材料 - 树脂	High Temperature Thermoplastic
材料 - 外壳	Stainless Steel

Downloaded From Oneyac.com

净重	0.516/g
包装形式	Embossed Tape on Reel
PCB 定位器	No
PCB 保持力	Yes
间距 - 插配接口	1.10mm
间距 - 终端界面	1.10mm
运行温度范围	-40° to +85° C
终端界面类型	Surface Mount

流程

最长持续时间	10
无铅	REFLOW
最大周期	2
最高温度	250

可配插/可连接使用的产品

可连接使用部件

说明	产品编号
可装的端子等部件	microSD Card

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>MOLEX

Downloaded From Oneyac.com