

# MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

## SMBJXXX(C)A-MS Product specification

**Description**

Transient voltage suppression diodes, also known as TVS diodes, are protective electronic parts that protect electrical equipment from voltage spikes introduced by wires.

**Applications**

- computer system
- domestic appliance
- video input







**Features**

- For surface mounted applications
- Excellent clamping capability
- 400 W peak pulse power capability with a 10/1000µs Waveform.
- $V_{RWM}$  3.3-440V
- Low profile package and low inductance
- Typical IR less than 1uA above 10 V
- Fast response time: typically less than 1.0ps from 0V to  $V_{BRmin}$ .

**Mechanical Characteristics**

- Package: SMA/DO-214AC
- Case Material:Molded Plastic. UL Flammability Classification Rating 94V-0 .RoHS compliant
- Moisture Sensitivity: Meet MSL 1
- Terminal: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models  
Weight: 0.07g(approximate)

**Reference News**

PACKAGE OUTLINE	PIN CONFIGURATION	Marking Information
		
<b>Unipolar</b>		
		
<b>Bipolar</b>		

**Electrical Characteristics (T=25°C)**

Part Number		Marking		V <sub>R</sub>	I <sub>R@V<sub>R</sub></sub>	V <sub>BR@I<sub>T</sub></sub>		I <sub>T</sub>	V <sub>C@I<sub>PP</sub></sub>	I <sub>PP</sub> <sup>①</sup>
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMBJ3.3A-MS	/	SMBJ3.3A	/	3.3	600	5.2	6	10	8.0	75.00
SMBJ5.0A-MS	SMBJ5.0CA-MS	SMBJ5.0A	SMBJ5.0CA	5.0	800	6.40	7.00	10	9.2	65.22
SMBJ6.0A-MS	SMBJ6.0CA-MS	SMBJ6.0A	SMBJ6.0CA	6.0	800	6.67	7.37	10	10.3	58.26
SMBJ6.5A-MS	SMBJ6.5CA-MS	SMBJ6.5A	SMBJ6.5CA	6.5	500	7.22	7.98	10	11.2	53.58
SMBJ7.0A-MS	SMBJ7.0CA-MS	SMBJ7.0A	SMBJ7.0CA	7.0	200	7.78	8.60	10	12.0	50.00
SMBJ7.5A-MS	SMBJ7.5CA-MS	SMBJ7.5A	SMBJ7.5CA	7.5	100	8.33	9.21	1	12.9	46.52
SMBJ8.0A-MS	SMBJ8.0CA-MS	SMBJ8.0A	SMBJ8.0CA	8.0	50	8.89	9.83	1	13.6	44.12
SMBJ8.5A-MS	SMBJ8.5CA-MS	SMBJ8.5A	SMBJ8.5CA	8.5	20	9.44	10.40	1	14.4	41.67
SMBJ9.0A-MS	SMBJ9.0CA-MS	SMBJ9.0A	SMBJ9.0CA	9.0	10	10.00	11.10	1	15.4	38.97
SMBJ10A-MS	SMBJ10CA-MS	SMBJ10A	SMBJ10CA	10.0	5	11.10	12.30	1	17.0	35.30
SMBJ11A-MS	SMBJ11CA-MS	SMBJ11A	SMBJ11CA	11.0	1	12.20	13.50	1	18.2	32.97
SMBJ12A-MS	SMBJ12CA-MS	SMBJ12A	SMBJ12CA	12.0	1	13.30	14.70	1	19.9	30.16
SMBJ13A-MS	SMBJ13CA-MS	SMBJ13A	SMBJ13CA	13.0	1	14.40	15.90	1	21.5	27.91
SMBJ14A-MS	SMBJ14CA-MS	SMBJ14A	SMBJ14CA	14.0	1	15.60	17.20	1	23.2	25.87
SMBJ15A-MS	SMBJ15CA-MS	SMBJ15A	SMBJ15CA	15.0	1	16.70	18.50	1	24.4	24.60
SMBJ16A-MS	SMBJ16CA-MS	SMBJ16A	SMBJ16CA	16.0	1	17.80	19.70	1	26.0	23.08
SMBJ17A-MS	SMBJ17CA-MS	SMBJ17A	SMBJ17CA	17.0	1	18.90	20.90	1	27.6	21.74
SMBJ18A-MS	SMBJ18CA-MS	SMBJ18A	SMBJ18CA	18.0	1	20.00	22.10	1	29.2	20.55
SMBJ20A-MS	SMBJ20CA-MS	SMBJ20A	SMBJ20CA	20.0	1	22.20	24.50	1	32.4	18.52
SMBJ22A-MS	SMBJ22CA-MS	SMBJ22A	SMBJ22CA	22.0	1	24.40	26.90	1	35.5	16.91
SMBJ24A-MS	SMBJ24CA-MS	SMBJ24A	SMBJ24CA	24.0	1	26.70	29.50	1	38.9	15.43
SMBJ26A-MS	SMBJ26CA-MS	SMBJ26A	SMBJ26CA	26.0	1	28.90	31.90	1	42.1	14.26
SMBJ28A-MS	SMBJ28CA-MS	SMBJ28A	SMBJ28CA	28.0	1	31.10	34.40	1	45.4	13.22
SMBJ30A-MS	SMBJ30CA-MS	SMBJ30A	SMBJ30CA	30.0	1	33.30	36.80	1	48.4	12.40
SMBJ33A-MS	SMBJ33CA-MS	SMBJ33A	SMBJ33CA	33.0	1	36.70	40.60	1	53.3	11.26
SMBJ36A-MS	SMBJ36CA-MS	SMBJ36A	SMBJ36CA	36.0	1	40.00	44.20	1	58.1	10.33
SMBJ40A-MS	SMBJ40CA-MS	SMBJ40A	SMBJ40CA	40.0	1	44.40	49.10	1	64.5	9.31
SMBJ43A-MS	SMBJ43CA-MS	SMBJ43A	SMBJ43CA	43.0	1	47.80	52.80	1	69.4	8.65
SMBJ45A-MS	SMBJ45CA-MS	SMBJ45A	SMBJ45CA	45.0	1	50.00	55.30	1	72.7	8.26
SMBJ48A-MS	SMBJ48CA-MS	SMBJ48A	SMBJ48CA	48.0	1	53.30	58.90	1	77.4	7.76
SMBJ51A-MS	SMBJ51CA-MS	SMBJ51A	SMBJ51CA	51.0	1	56.70	62.70	1	82.4	7.29
SMBJ54A-MS	SMBJ54CA-MS	SMBJ54A	SMBJ54CA	54.0	1	60.00	66.30	1	87.1	6.89
SMBJ58A-MS	SMBJ58CA-MS	SMBJ58A	SMBJ58CA	58.0	1	64.40	71.20	1	93.6	6.42
SMBJ60A-MS	SMBJ60CA-MS	SMBJ60A	SMBJ60CA	60.0	1	66.70	73.70	1	96.8	6.20
SMBJ64A-MS	SMBJ64CA-MS	SMBJ64A	SMBJ64CA	64.0	1	71.10	78.60	1	103.0	5.83

**Electrical Characteristics (T=25°C)**

Part Number		Marking		V <sub>R</sub>	I <sub>R@V<sub>R</sub></sub>	V <sub>BR@I<sub>T</sub></sub>		I <sub>T</sub>	V <sub>C@I<sub>PP</sub></sub>	I <sub>PP</sub> <sup>①</sup>
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMBJ70A-MS	SMBJ70 CA-MS	SMBJ70A	SMBJ70 CA	70.0	1	77.80	86.00	1	113.0	5.31
SMBJ75A-MS	SMBJ75 CA-MS	SMBJ75A	SMBJ75 CA	75.0	1	83.30	92.10	1	121.0	4.96
SMBJ78A-MS	SMBJ78 CA-MS	SMBJ78A	SMBJ78 CA	78.0	1	86.70	95.80	1	126.0	4.77
SMBJ85A-MS	SMBJ85 CA-MS	SMBJ85A	SMBJ85 CA	85.0	1	94.40	104.0	1	137.0	4.38
SMBJ90A-MS	SMBJ90 CA-MS	SMBJ90A	SMBJ90 CA	90.0	1	100.0	111.0	1	146.0	4.11
SMBJ100A-MS	SMBJ100CA-MS	SMBJ100A	SMBJ100CA	100.0	1	111.0	123.0	1	162.0	3.71
SMBJ110A-MS	SMBJ110CA-MS	SMBJ110A	SMBJ110CA	110.0	1	122.0	135.0	1	177.0	3.39
SMBJ120A-MS	SMBJ120CA-MS	SMBJ120A	SMBJ120CA	120.0	1	133.0	147.0	1	193.0	3.11
SMBJ130A-MS	SMBJ130CA-MS	SMBJ130A	SMBJ130CA	130.0	1	144.0	159.0	1	209.0	2.88
SMBJ150A-MS	SMBJ150CA-MS	SMBJ150A	SMBJ150CA	150.0	1	167.0	185.0	1	243.0	2.47
SMBJ160A-MS	SMBJ160CA-MS	SMBJ160A	SMBJ160CA	160.0	1	178.0	197.0	1	259.0	2.32
SMBJ170A-MS	SMBJ170CA-MS	SMBJ170A	SMBJ170CA	170.0	1	189.0	209.0	1	275.0	2.19
SMBJ180A-MS	SMBJ180CA-MS	SMBJ180A	SMBJ180CA	180.0	1	201.0	222.0	1	292.0	2.06
SMBJ190A-MS	SMBJ190CA-MS	SMBJ190A	SMBJ190CA	190.0	1	209.0	233.0	1	308.0	1.96
SMBJ200A-MS	SMBJ200CA-MS	SMBJ200A	SMBJ200CA	200.0	1	224.0	247.0	1	324.0	1.86
SMBJ210A-MS	SMBJ210CA-MS	SMBJ210A	SMBJ210CA	210.0	1	237.0	263.0	1	340.0	1.79
SMBJ220A-MS	SMBJ220CA-MS	SMBJ220A	SMBJ220CA	220.0	1	246.0	272.0	1	356.0	1.69
SMBJ250A-MS	SMBJ250CA-MS	SMBJ250A	SMBJ250CA	250.0	1	279.0	309.0	1	405.0	1.49
SMBJ300A-MS	SMBJ300CA-MS	SMBJ300A	SMBJ300CA	300.0	1	335.0	371.0	1	486.0	1.24
SMBJ350A-MS	SMBJ350CA-MS	SMBJ350A	SMBJ350CA	350.0	1	391.0	432.0	1	567.0	1.06
SMBJ400A-MS	SMBJ400CA-MS	SMBJ400A	SMBJ400CA	400.0	1	447.0	494.0	1	648.0	0.93
SMBJ440A-MS	SMBJ440CA-MS	SMBJ440A	SMBJ440CA	440.0	1	492.0	543.0	1	713.0	0.85

**Notes:**

① Surge waveform: 10/1000μs


V<sub>R</sub> : Stand-off Voltage -- Maximum voltage that can be applied

V<sub>BR</sub>: Breakdown Voltage

V<sub>C</sub>: Clamping Voltage -- Peak voltage measured across the suppressor at a specified I<sub>pp</sub>

I<sub>R</sub>: Reverse Leakage Current

**Part number code**

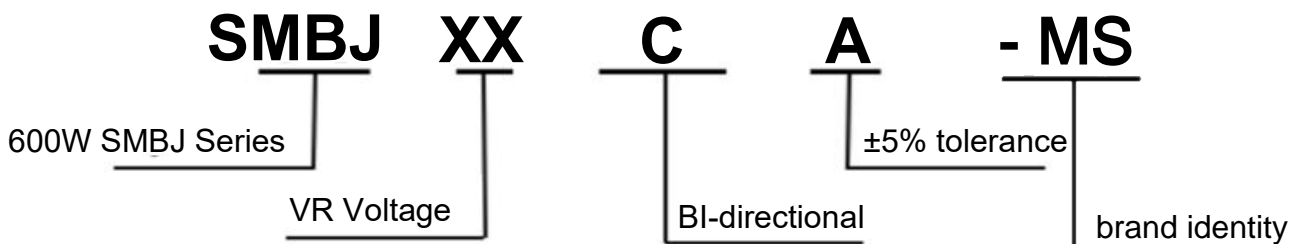


**Absolute Maximum Ratings(T=25°C, RH=45%-75%, unless otherwise noted)**

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000µs waveform	P <sub>PP</sub>	600	W
Steady state power dissipation at T <sub>L</sub> =75°C	P <sub>M(AV)</sub>	5.0	W
Operating junction temperature range	T <sub>j</sub>	-55 to +125	°C
Storage temperature range	T <sub>stg</sub>	-55 to +150	°C

**Ratings And V-I Characteristics Curves (T=25°C, unless otherwise noted)**

FIG1: V-I cure characteristics

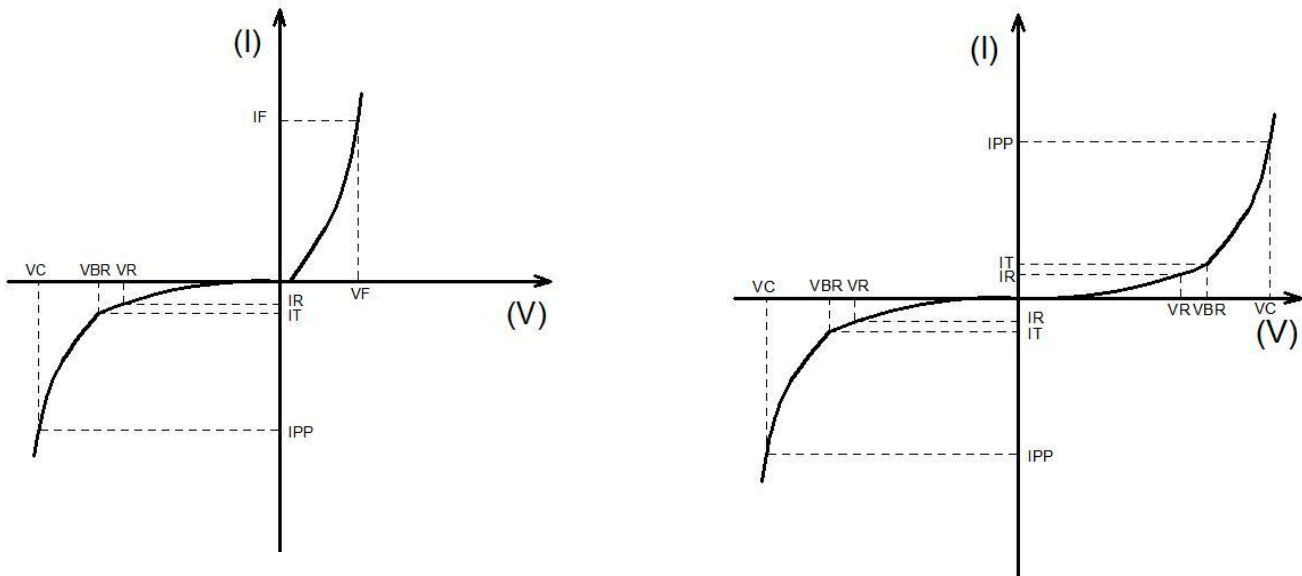

Symbol	Parameter
I <sub>F</sub>	Mean Forward Current
V <sub>F</sub>	Maximum Forward Voltage @ I <sub>F</sub>
V <sub>R</sub>	Peak Reverse Working Voltage
I <sub>R</sub>	Reverse Leakage Current @ V <sub>R</sub>
V <sub>BR</sub>	Breakdown Voltage @ I <sub>r</sub>
I <sub>r</sub>	Test Current
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>

Typical Characteristics

FIG2: Pulse Derating Curve

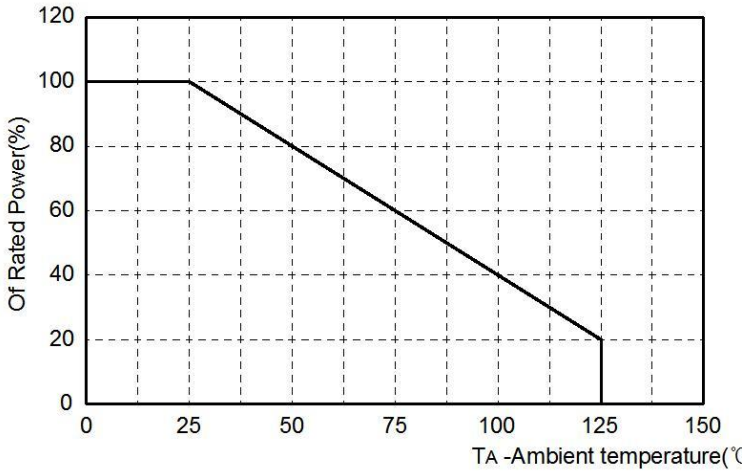


FIG3: Pulse Wavefor

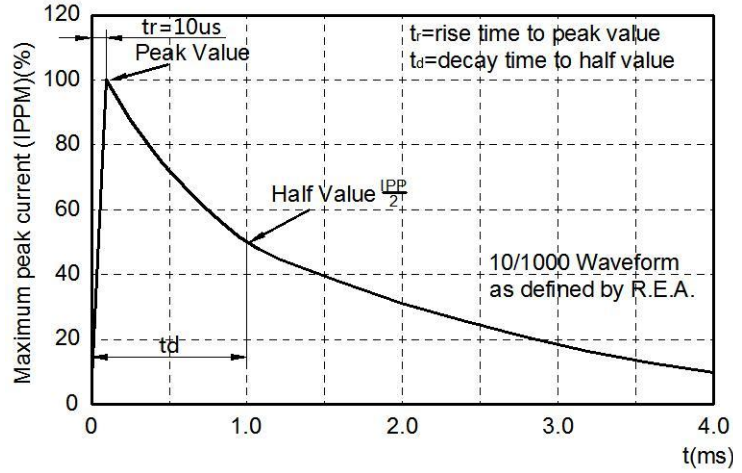


FIG4: Peak Pulse Power Rating Curve



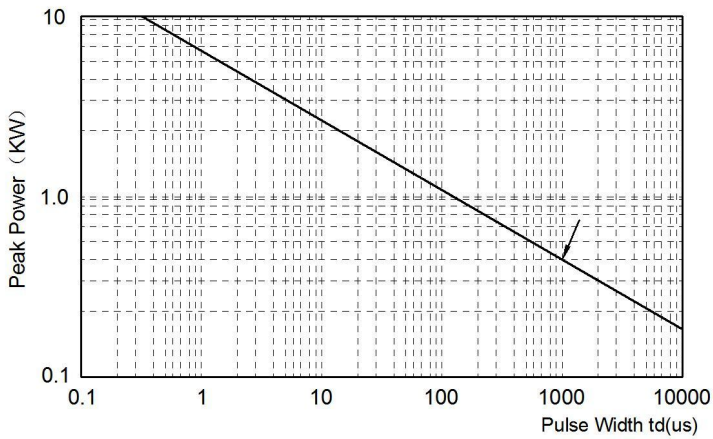


FIG5: Steady State Power Dissipation

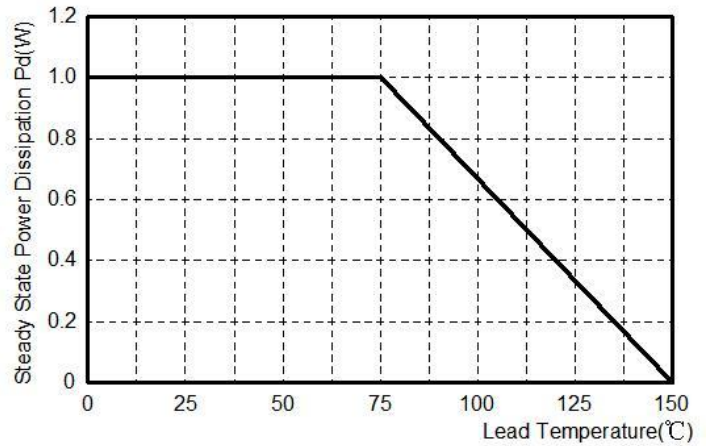

**PACKAGE MECHANICAL DATA**

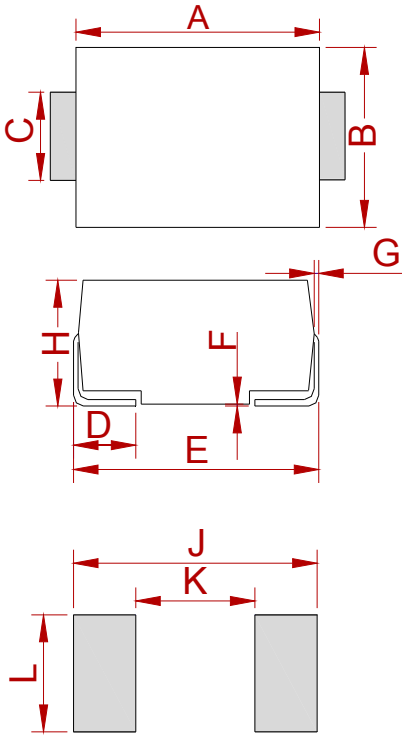

DO-214AA (SMB)

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.25	4.75	0.167	0.187
B	3.30	3.94	0.130	0.155
C	1.85	2.21	0.073	0.087
D	0.76	1.52	0.030	0.060
E	5.08	5.59	0.200	0.220
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.11	2.44	0.083	0.096
J	6.80		0.270	
K		2.60		0.100
L	2.40		0.090	

**REEL SPECIFICATION**

P/N	PKG	QTY
SMBJXXXA(CA)-MS	SMB	3000

## Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.



单击下面可查看定价，库存，交付和生命周期等信息

[>>MSKSEMI\(美森科\)](#)