

# RPE5C1H100J2M1Z03A


" # " indicates a package specification code.

To be discontinued
Flow OK
Complies with RoHS
AEC-Q200
Anti-noise
Deflecting crack
Soldering crack

Deadline for last orders: 30 Apr 2014

< List of part numbers with package codes >  
RPE5C1H100J2M1Z03A

## Shape

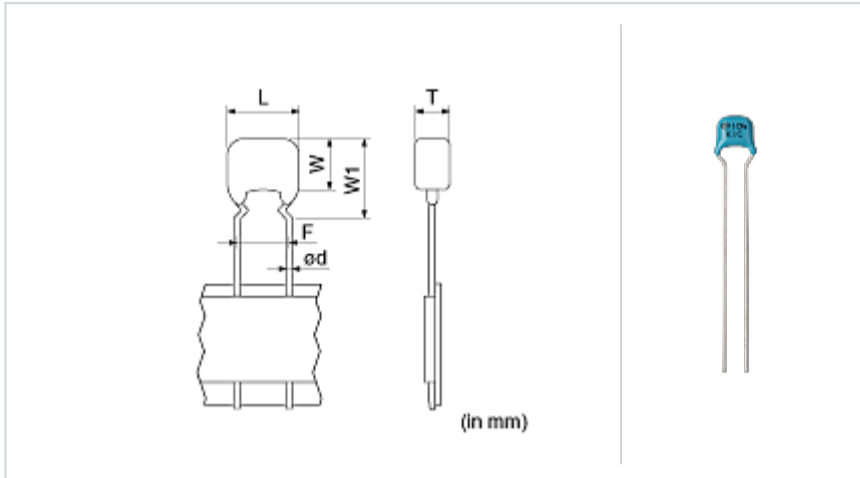

L size or outer diameter D (mm)	5.0 mm max.
W size	3.5 mm max.
T size	2.5 mm max.
Lead spacing F	5 +0.6/-0.2mm
Lead diameter d	0.5 ± 0.05mm
W1 size (max.)	5.0mm

## References

Packaging	Specifications	Minimum quantity
	Ammo pack taping type	2000

## Specifications

Capacitance	10pF ± 5%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	C0G(EIA)
Temperature coefficient	0 ± 30ppm/
Temperature range of temperature characteristics	25 to 125
Operating temperature range	-55 to 125

### ⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Murata\(村田\)](#)