


**RF3336E**

**868.35 MHz  
SAW Filter**



- **Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**

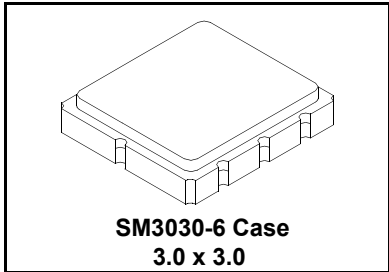

The RF3336E is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 868.35 MHz receivers. Receivers using this filter include superheterodynes with 10.7 MHz or 500 kHz IFs, direct conversion receivers and superregenerative receivers. Typical applications of these receivers include wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220. This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency @ 25°C Absolute Frequency	$f_c$	1, 2, 3		868.35		MHz
Insertion Loss	IL	1, 3		2.5	4.0	dB
3 dB Bandwidth	BW <sub>3</sub>	1, 2, 3	500	650	900	kHz
Attenuation: (relative to IL <sub>min</sub> )		1, 3	10 - 700 MHz	50	55	dB
			700 - 830 MHz	40	45	
			830 - 850 MHz	35	40	
			850 - 864.4 MHz	20	25	
			870.4 - 877.4 MHz	21	26	
			877.4 - 882.4 MHz	15	19	
			882.4 - 900 MHz	28	35	
900 - 1000 MHz	40	45				
Temperature Freq. Temp. Coefficient	FTC	3, 4		0.032		ppm/°C <sup>2</sup>
Frequency Aging Absolute Value during the First Year	fA	5		<±10		ppm/yr
Impedance @ $f_c$	$Z_{IN} = R_{IN} \parallel C_{IN}$	1	$Z_{IN}$		55 Ω    23.9 pF	
	$Z_{OUT} = R_{OUT} \parallel C_{OUT}$		$Z_{OUT}$		53 Ω    20.2 pF	
Lid Symbolization (in addition to Lot and/or Date Codes)	700    YWWS					
Standard Reel Quantity	Reel Size 7 Inch	9	500 Pieces/Reel			
	Reel Size 13 Inch		3000 Pieces/Reel			




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


**NOTES:**

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
2. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
3. Where noted specifications apply over the entire specified operating temperature range of -40 to 90°C.
4. The turnover temperature,  $T_o$ , is the temperature of maximum (or turnover) frequency,  $f_o$ . The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_o [1 - FTC (T_o - T_c)^2]$ .
5. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
9. Tape and Reel Standard for ANSI / EIA 481.

# Frequency Response Plots

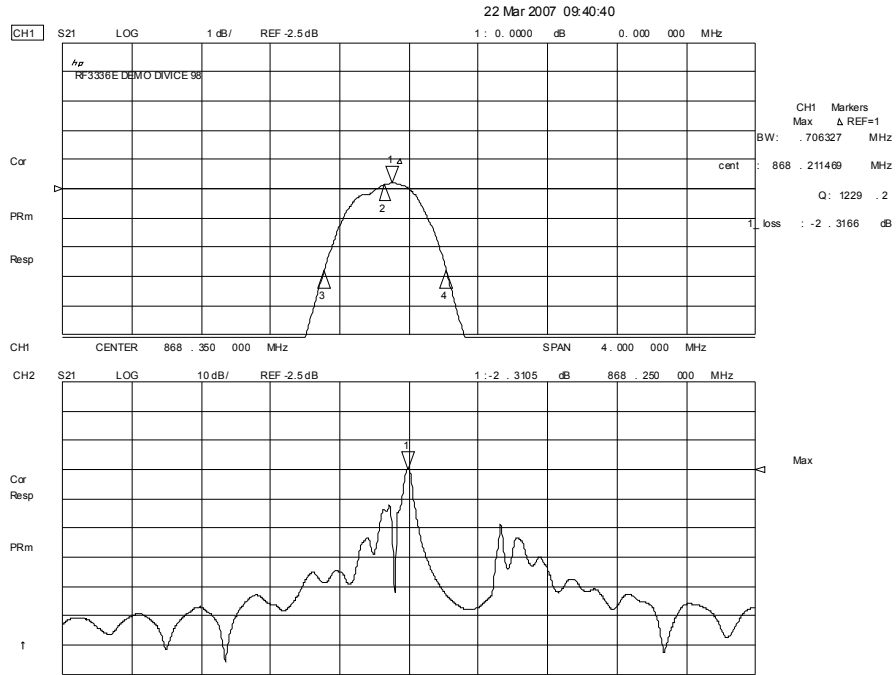


# Impedance Plots

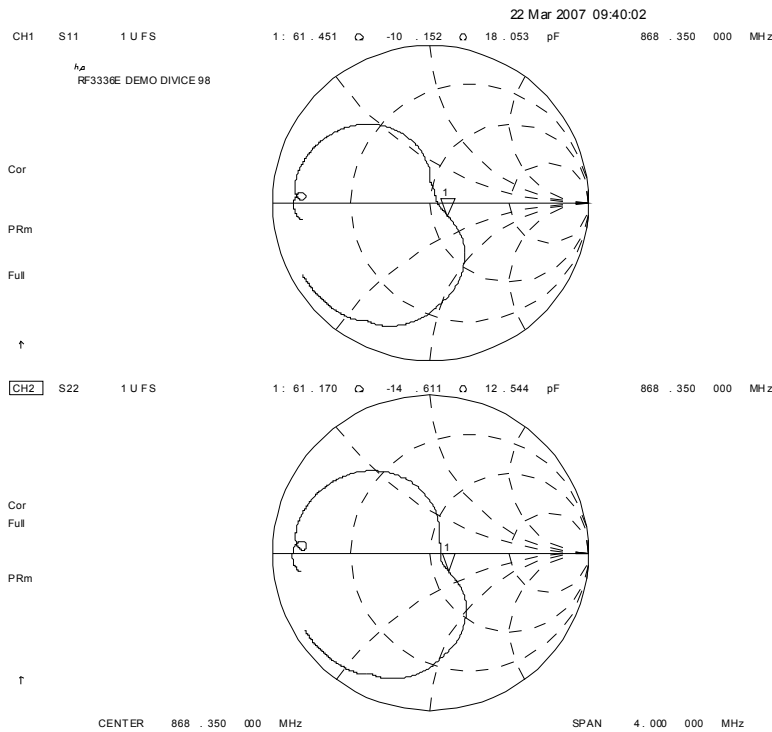

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage on any non-ground Terminal	12	VDC
Storage Temperature	-40 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature (10 seconds / 5 cycles Max.)	260	°C


### Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	Case Ground
4	Output Ground
5	Output
6	Ground

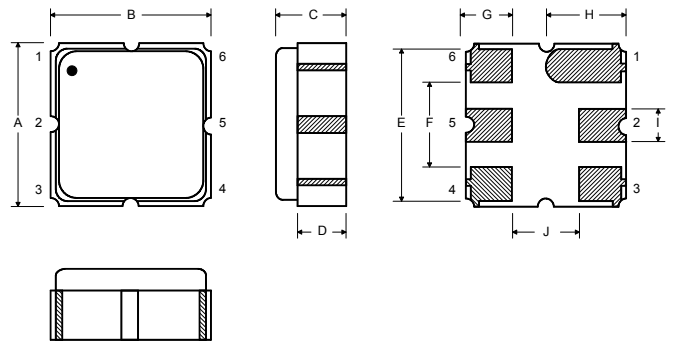

### Case Dimensions

### Matching Circuit to 50Ω

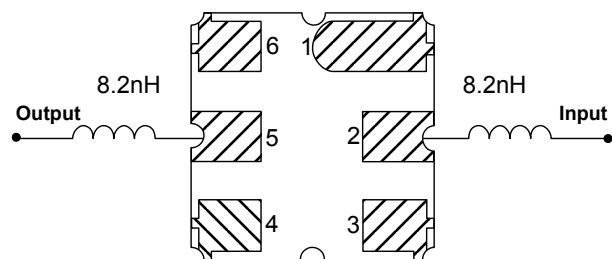


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.87	3.0	3.13	0.113	0.118	0.123
B	2.87	3.0	3.13	0.113	0.118	0.123
C	1.12	1.25	1.38	0.044	0.049	0.054
D	0.77	0.90	1.03	0.030	0.035	0.040
E	2.67	2.80	2.93	0.105	0.110	0.115
F	1.47	1.6	1.73	0.058	0.063	0.068
G	0.72	0.85	0.98	0.028	0.033	0.038
H	1.37	1.5	1.63	0.054	0.059	0.064
I	0.47	0.60	0.73	0.019	0.024	0.029
J	1.17	1.30	1.43	0.046	0.051	0.056

Optional

### Electrical Connections

Pin	Connection
1	Input
2	Input Ground
3	Case Ground
4	Output
5	Output Ground
6	Ground

### Matching Circuit to 50Ω

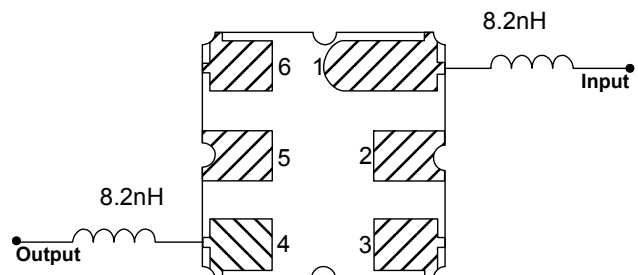

单击下面可查看定价，库存，交付和生命周期等信息

[>>Murata\(村田\)](#)