

# ALUMINUM ELECTROLYTIC CAPACITORS

# UWP

5.5mmL Chip Type, Bi-Polarized




- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.




## Specifications

Item	Performance Characteristics												
Category Temperature Range	-40 to +85°C												
Rated Voltage Range	6.3 to 50V												
Rated Capacitance Range	0.1 to 100μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.05CV or 10 (μA) ,whichever is greater.												
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C												
	Rated voltage (V)	6.3	10	16	25	35	50						
Stability at Low Temperature	Measurement frequency : 120Hz												
	Rated voltage (V)		6.3	10	16	25	35	50					
	Impedance ratio	Z-25°C / Z+20°C	4	3	2	2	2	2					
Endurance	ZT / Z20 (MAX.)		Z-40°C / Z+20°C	8	6	4	4	3					
	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C with the polarity inverted every 250 hours.		<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within ±20% of the initial capacitance value												
tan δ	200% or less than the initial specified value												
Leakage current	Less than or equal to the initial specified value												
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.												
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±10% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	Within ±10% of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within ±10% of the initial capacitance value												
tan δ	Less than or equal to the initial specified value												
Leakage current	Less than or equal to the initial specified value												
Marking	Black print on the case top.												

## Chip Type

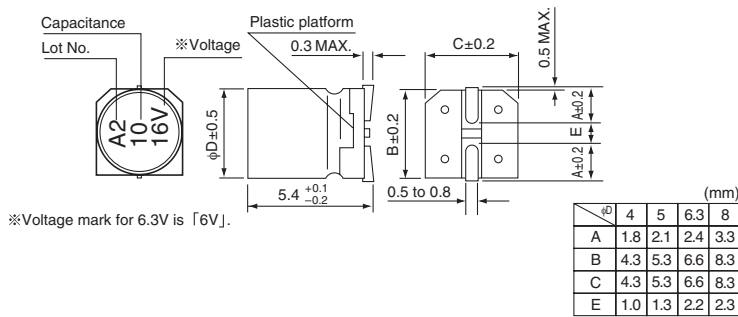

## Type numbering system (Example : 16V 10μF)

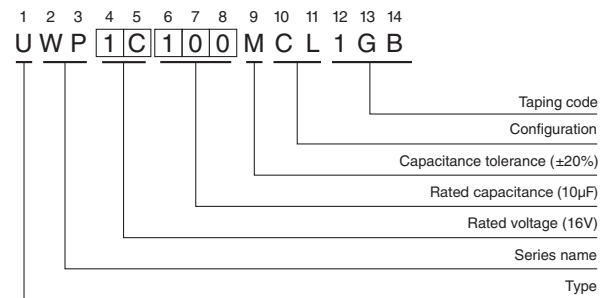

## Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

●Dimension table in next page.

UWP

## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Rated Ripple (mArms) (85°C/120Hz)	Part Number
6.3 (0J)	22	5×5.4	0.24	10	28	UWP0J220MCL1GB
	33	6.3×5.4	0.24	10.395	37	UWP0J330MCL1GB
	47	6.3×5.4	0.24	14.805	45	UWP0J470MCL1GB
	100	8×5.4	0.24	31.5	82	UWP0J101MCL1GB
10 (1A)	10	4×5.4	0.20	10	17	UWP1A100MCL1GB
	22	6.3×5.4	0.20	11	33	UWP1A220MCL1GB
	33	6.3×5.4	0.20	16.5	41	UWP1A330MCL1GB
	47	8×5.4	0.20	23.5	61	UWP1A470MCL1GB
16 (1C)	4.7	4×5.4	0.17	10	12	UWP1C470MCL1GB
	10	5×5.4	0.17	10	23	UWP1C100MCL1GB
	22	6.3×5.4	0.17	17.6	37	UWP1C220MCL1GB
	33	6.3×5.4	0.17	26.4	49	UWP1C330MCL1GB
	47	8×5.4	0.17	37.6	75	UWP1C470MCL1GB
25 (1E)	3.3	5×5.4	0.17	10	12	UWP1E330MCL1GB
	4.7	5×5.4	0.17	10	16	UWP1E470MCL1GB
	10	6.3×5.4	0.17	12.5	27	UWP1E100MCL1GB
	22	8×5.4	0.17	27.5	50	UWP1E220MCL1GB
	33	8×5.4	0.17	41.25	61	UWP1E330MCL1GB
35 (1V)	2.2	4×5.4	0.15	10	8.4	UWP1V220MCL1GB
	3.3	5×5.4	0.15	10	16	UWP1V330MCL1GB
	4.7	5×5.4	0.15	10	18	UWP1V470MCL1GB
	10	6.3×5.4	0.15	17.5	29	UWP1V100MCL1GB
	22	8×5.4	0.15	38.5	54	UWP1V220MCL1GB
50 (1H)	0.1	4×5.4	0.15	10	1.0	UWP1H010MCL1GB
	0.22	4×5.4	0.15	10	2.0	UWP1HR220MCL1GB
	0.33	4×5.4	0.15	10	2.8	UWP1HR330MCL1GB
	0.47	4×5.4	0.15	10	4.0	UWP1HR470MCL1GB
	1	4×5.4	0.15	10	8.4	UWP1H010MCL1GB
	2.2	5×5.4	0.15	10	13	UWP1H220MCL1GB
	3.3	5×5.4	0.15	10	17	UWP1H330MCL1GB
	4.7	6.3×5.4	0.15	11.75	20	UWP1H470MCL1GB
	10	8×5.4	0.15	25	36	UWP1H100MCL1GB

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.
- Please select UUN if high C/V products are required.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Nichicon\(尼吉康\)](#)