


※ Trimmed (Cut) or Formed Leads ※ Please refer to page 23 about the FPCAP product spec.


● Radial lead type

In order to identify correct part number for the processed lead product, cut/formed lead code must be added to bulk part number.

● If the bulk part number is up to 11th digit, processed lead coding shall be as follows:



● In case 12th digit is alphabet, it shall be:



● In case 12th digit is numeral, it shall be:



Configurations	Cut / Formed lead code		Dimensions (mm)				Lead configurations	
	Code	Case length	φD	F	L	ℓ		
Forming and cutting	[B A]	5mmL,7mmL	4	5	5.0	—	(Code [B A], [B B]) 1.5MAX. (Code [F A], [F V]) 2.5MAX. 	
	[F A]	Other length	5			—		
	[B B]	5mmL,7mmL	4	5	3.5	—		
	[F V]	Other length	5			—		
Forming and cutting	[S Z]	All Series	10	5	3.2	—	<p>※ Please contact your local Nichicon sales office for the following sizes.                      — 10mm Diameter parts with 9mm length or less, and 25mm length or larger                      — 12.5 to 18mm Diameter parts with 12.5mm length or less, and 46mm or larger                      ※ This operation is available on product made in Japan.</p>	
		12.5		—				
		16	7.5	—				
		18		—				
Cutting	[C A]	All length	3	1.0	5.0	—	<p>※ φ 8 × 5 = F: 2.5                      ※ Please contact us for the φ 16 to φ 25 × 12.5L products.</p>	
			4	1.5		—		
			5	2.0		—		
			6.3	2.5		—		
			8	※ 3.5		—		
			10	5		—		
			12.5			—		
			16	7.5		—		
			18			—		
	20	10	—					
	22		—					
[C P]	All length	Same as above.	4.5	—				
[C C]	All length	Same as above.	4.0	—				
[C V]	All length	Same as above.	3.5	—				
[C T]	All length	Same as above.	3.2	—				
[C M]	All length	Same as above.	3.0	—				
Snap-in	[A E]	5mmL,7mmL	4	5	4.5	1.1	(φ 4, 5, 6.3, 8) (Code [A E]) 1.5 MAX. (Code [A A]) 2.5 MAX. 	
	[A A]	Other length	5					—
	[A A]	All length	10	5	4.5	1.3		
			12.5					
			16					
			18	7.5				
			20	10	5.0	1.8		
			22					
	25	12.5						

● Conductive polymer aluminum solid electrolytic capacitors : Cutting configurations only

• Lead diameter (φd) and lead pitch (P) are subject to capacitor specifications.

End seal Configuration ※ Please contact us about the FPCAP.

Configuration	※2		※1		
φ(mm)	3	5 · 6.3	4 · 8 · 10	12.5 · 16 · 18	20 · 22 · 25

Exception : φ5, φ6.3 case size of UMA, UMR, UMF, UMP, UMT, UMW, USA, USF, USP, USR, UST, USW, UPW (7mmL), UTT (7mmL) : configuration ※1  
 φ6.3 × 6mmL, φ6.3 × 9mmL, φ8 × 7mmL, φ8 × 9mmL, φ10 × 8mmL, φ10 × 10mmL size of PLF\*, PLE\*, PLG\*, PLS\*, PLV\*, PLX\*, UMV, USV, UPV  
 [9] will be put at 12th digit of type numbering system of UCS, UPZ : configuration ※2

\* Conductive polymer aluminum solid electrolytic capacitors

## ※ Taped Leads for Automatic Insertion Systems

※ Please refer to page 23 about the FPCAP product spec.

- Radial lead type (Applicable standard JIS C0806-2)  
In order to identify correct part number for the taped product, taping code must be added.


- If the bulk part number is up to 11th digit, taping code shall be as follows: 12 13 14



- In case 12th digit is numeral, it shall be




- In case 12th digit is alphabet, it shall be




Specifications				Capacitor diameter (φ)	Taping code	
Packaging	Lead style	F	P <sub>0</sub>		Code	Applicable size
Ammo-pack	Formed lead	See Table 1	12.7	3 to 8	TE	φ4 to 8 Case length (5mmL, 7mmL) φ3×5 φ5×9 to φ8×9, φ5×11 to φ8×20
					TP	
	Straight lead	See Table 2	12.7	4 to 10	TP	φ4 to 8 Case length (5mmL), φ6.3×6※ φ4 to 6.3 Case length (7mmL), φ4 φ5×9 or more, φ6.3×9 or more, φ8×7 or more, φ10×8 to 25
					TD	
		See Table 2	15.0	12.5	TO	φ12.5×12.5 to 25
		See Table 2	15.0	16, 18	TN	φ16×15 to 25, φ18×15 to 25

Notes: ※ Conductive polymer aluminum solid electrolytic capacitors

### (Formed lead type)

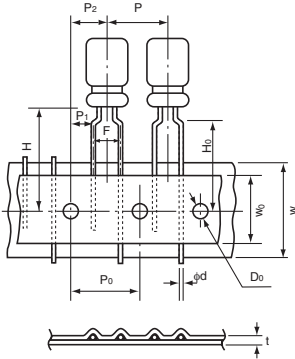

### (Straight lead type)

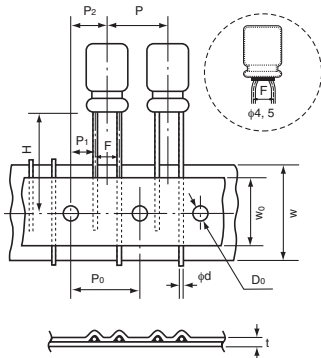

- Special taping specifications on H, F, and K. dimensions other than the above figures are available upon request.
- Conductive polymer aluminum solid electrolytic capacitors: Straight lead type only
- Only the above mentioned dimensions are specified.

Table 1

Item	Case Size Taping Code	Tolerance	Formed Lead Type						Case dia (φ) × Length (L)				
			φ3 × 5			φ4 × 5 φ5 × 5 φ6.3 × 5 φ8 × 5			φ5 × 9 φ6.3 × 9		φ8 × 9	φ8 × 11.5	φ8 × 15
			TP	TE	TE	φ4 × 7 φ5 × 7 φ6.3 × 7 φ8 × 7	φ5 × 11	φ6.3 × 11	φ6.3 × 15	φ8 × 20	φ8 × 25		
φd	Lead-wire diameter	±0.05	0.40	0.45 (φ8 × 7 : 0.5)			0.5		0.6				
P	Pitch of component	±1.0	12.7	12.7			12.7		12.7				
P <sub>0</sub>	Feed hole pitch	±0.2	12.7	12.7			12.7		12.7				
P <sub>1</sub>	Hole center to lead	±0.5	5.1	3.85			3.85		3.85				
P <sub>2</sub>	Feed hole center to component center	±1.0	6.35	6.35			6.35		6.35				
F	Lead-to-lead distance	+0.8 -0.2	2.5	5.0			5.0		5.0				
H	Height of component from tape center	±0.75	18.5	17.5			18.5		20.0				
H <sub>0</sub>	Lead-wire clinch height	±0.5	16.0 ※3	16.0			16.0		16.0				
W	Tape Width	±0.5	18.0	18.0			18.0		18.0				
W <sub>0</sub>	Hold down tape width	MIN.	7.0	7.0			7.0		7.0				
φD <sub>0</sub>	Feed hole diameter	±0.2	4.0	4.0			4.0		4.0				
t	Total tape thickness	±0.2	0.6	0.6			0.6		0.6				


Table 2

Item	Case Size Taping Code	Tolerance	Straight Lead Type					Case dia (φ) × Length (L)				
			φ4 × 5 φ4 × 7		φ5	φ6.3	φ8 × 5	φ8 × 7	φ8	φ10	φ12.5	φ16 φ18
			TP	TP, TD	TP, TD	TP	TD	TD	TD	TD	TO	TN
φd	Lead-wire diameter	±0.05	0.45	0.45 0.5, 0.6	0.45 0.5, 0.6	0.45	0.5	0.6	0.6	0.6	0.6	0.8
P	Pitch of component	±1.0	12.7	12.7	12.7	12.7	12.7	12.7	12.7	15.0	30.0	
P <sub>0</sub>	Feed hole pitch	±0.2	12.7	12.7	12.7	12.7	12.7	12.7	12.7	15.0	15.0	
P <sub>1</sub>	Hole center to lead	±0.5	5.1 (※1 5.35)	5.1 (※1 5.35)	5.1	5.1	4.6	4.6	3.85	5.0	3.75	
P <sub>2</sub>	Feed hole center to component center	±1.0	6.35	6.35	6.35	6.35	6.35	6.35	6.35	7.5	7.5	
F	Lead-to-lead distance	+0.8 -0.2	2.5※1	2.5※1	2.5	2.5	3.5	3.5	5.0	5.0	7.5※2	
H	Height of component from tape center	±0.75	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	
W	Tape Width	±0.5	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
W <sub>0</sub>	Hold down tape width	MIN.	7.0	7.0	7.0	7.0	7.0	7.0	7.0	12.5	12.5	
φD <sub>0</sub>	Feed hole diameter	±0.2	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	
t	Total tape thickness	±0.2	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

Notes: ※ 1 F = 2.0mm is also available, provided Taping code to be TEC. ※ 2 Tolerance on F for φ16 and φ18 units shall be ±0.8mm. ※ 3 Tolerance on Ho for φ3 units shall be 16.0 MIN.

## Packaging

- Ammo-pack (Flat box type)

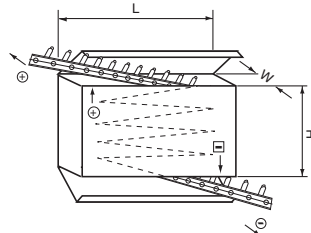

L	H	W	Case Size (φD × L)	Q'ty / Box
340	150	50	3 × 5	2,000
340	200	50	4 × 5, 4 × 7	2,000
340	250	50	5 × 5, 5 × 7	2,000
			8 × 5, 8 × 7, 8 × 8	1,000
340	300	50	6.3 × 5, 6.3 × 6, 6.3 × 7	2,000
340	260	54	5 × 9, 5 × 11	2,000
			8 × 9, 8 × 10, 8 × 11.5, 8 × 12, 8 × 15	1,000
340	200	54	10 × 8, 10 × 9, 10 × 10, 10 × 12.5, 10 × 13, 10 × 15, 10 × 16	500
340	300	54	6.3 × 9, 6.3 × 10.5, 6.3 × 11, 6.3 × 15	2,000
340	260	62	8 × 20	1,000
340	200	62	10 × 20	500
340	200	65	10 × 25	500
330	290	65	12.5 × 12.5, 12.5 × 15, 12.5 × 20	500
			12.5 × 25	
			18 × 15, 18 × 20, 18 × 25	250
320	230	65	16 × 15, 16 × 20, 16 × 25	250

**FPCAP Lead forming (Radial lead type)**

*RNS, RR7, RR5, RL8, RE5, RS8, RF8, RNU, RNE, RNL, RS6, RHT*

**Components are packaged as per following packing unit.**

● Packing Quantity (Bulk)

Case Size φD × L (mm)	Long Lead		Cut Lead	
	Quantity vinyl bag (PCS)	Minimum quantity (PCS / Carton Box)	Quantity vinyl bag (PCS)	Minimum quantity (PCS / Carton Box)
φ4×5	200	8,000	200	8,000
φ5×8, φ5×10	200	3,200	200	4,000
φ6.3×5, φ6.3×6, φ6.3×7	200	4,000	200	4,000
φ6.3×8, φ6.3×10	200	3,200	200	4,000
φ8×6, φ8×8, φ8×9	200	3,200	200	4,000
φ8×11.5	100	2,000	200	2,400
φ8×16	100	1,600	100	2,000
φ8×20	100	1,200	100	1,600
φ10×12.5	100	1,600	100	2,000
φ10×20	100	800	100	1,200

Please note the order quantity must be in multiples of the minimum quantity.

● Bulk Long Lead Part Number

Nichicon P/N : R□□□□□□□ M□□□ □□


FPCAP P/N : FP- □□□RE□□□□M- □□ R

● Cut Lead (Bulk) Dimensions

Lead Forming (Symbol:CG)

Nichicon P/N : R□□□□□□□ M□□□ CG

FPCAP P/N : FP- □□□RE□□□□M- □□ CG

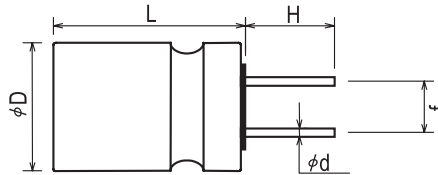

[Unit : mm]

Item	φD×L	φ4×5	φ5×8, φ5×10	φ6.3×5, φ6.3×6, φ6.3×7, φ6.3×8, φ6.3×10	φ8×6, φ8×8, φ8×9, φ8×11.5, φ8×16, φ8×20	φ10×12.5, φ10×20
Lead Forming Symbol		<b>CG</b>	<b>CG</b>	<b>CG</b>	<b>CG</b>	<b>CG</b>
Lead Wire Diameter φd		0.45±0.05	0.5, 0.6±0.05	0.45, 0.5, 0.6±0.05	0.6±0.05	0.6±0.05
Lead Wire Length H		3.1±0.3	3.1±0.3	3.1±0.3	3.1±0.3	3.1±0.3
Lead Wire Interval f		1.5±0.5	2.0±0.5	2.5±0.5	3.5±0.5	5.0±0.5


Note : Please inquire for FPCAP by Packing Unit as above.

**FPCAP Taped Leads for Automatic Insertion Systems (Radial lead type)**


*RNS, RR7, RR5, RL8, RE5, RS8, RF8, RNU, RNE, RNL, RS6, RHT*

● Packing Quantity(Ammo Pack)

Size (dia)	Minimum quantity (pcs / Ammo Pack)
φ5	2,000
φ6.3	2,000
φ8	1,000
φ10	500

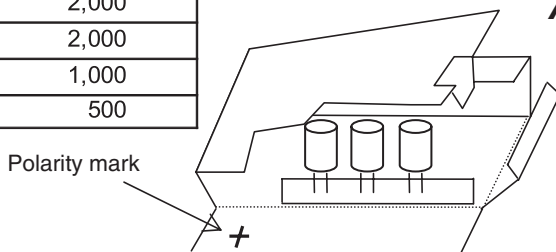

**Ammo pack**

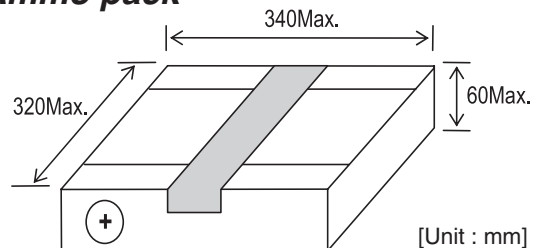

[Unit : mm]


The lid of feeding side of the taping box shall be torn off at the perforation line.

● Taping Dimensions

Lead Forming ( Symbol:Ex. PX ) Nichicon P/N Symbol : R□□□□□□ M□□□PX  
 FPCAP P/N Symbol : FP-□□□RE□□□M-□□ P


■ 2.5mm pitch taping  
 Taping Dimensions for  $\phi 5$

Nichicon P/N Symbol : JT ( $\phi 5 \times 8$ ) , JX ( $\phi 5 \times 10$ )  
 FPCAP P/N Symbol : JT ( $\phi 5 \times 8$ ) , J ( $\phi 5 \times 10$ )

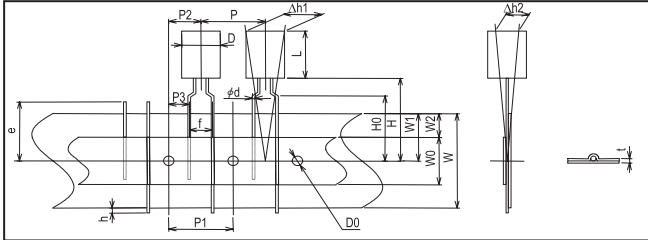


■ 2.5mm pitch taping  
 Taping Dimensions for  $\phi 6.3$

Nichicon P/N Symbol : JT ( $\phi 6.3 \times 5$  to 8) , JX ( $\phi 6.3 \times 10$ )  
 FPCAP P/N Symbol : JT ( $\phi 6.3 \times 5$  to 8) , J ( $\phi 6.3 \times 10$ )

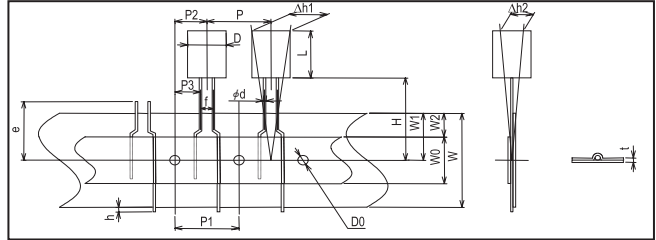


■ 5.0mm pitch taping  
 Taping Dimensions for  $\phi 5$ ,  $\phi 6.3$ ,  $\phi 8$

Nichicon P/N Symbol : PX  
 FPCAP P/N Symbol : P

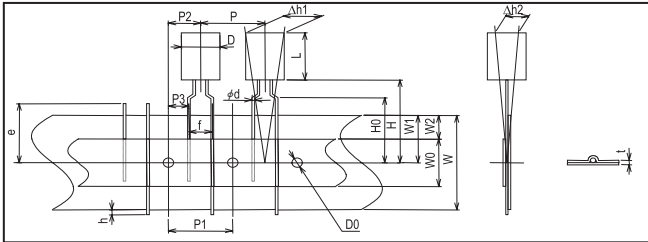

■ 2.0mm( $\phi 5$ ) or 3.5mm( $\phi 8$ ) or 5.0mm( $\phi 10$ ) pitch taping  
 Taping Dimensions for  $\phi 5$ ,  $\phi 8$ ,  $\phi 10$

Nichicon P/N Symbol : TX ( $\phi 5$ ) , KX ( $\phi 8$ ) , PH ( $\phi 10$ )  
 FPCAP P/N Symbol : T ( $\phi 5$ ) , K ( $\phi 8$ ) , PH ( $\phi 10$ )

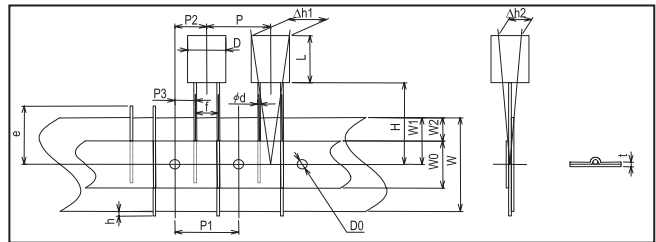

● Specification Table

[Unit : mm]

Item	$\phi D \times L$	$\phi 6.3 \times 6$ , $\phi 6.3 \times 7$	$\phi 5 \times 8$ , $\phi 6.3 \times 8$	$\phi 6.3 \times 5$ , $\phi 5 \times 8$	$\phi 5 \times 10$ , $\phi 6.3 \times 10$	$\phi 6.3 \times 6$ , $\phi 6.3 \times 7$	$\phi 5 \times 8$ , $\phi 6.3 \times 8$	$\phi 5 \times 10$ , $\phi 6.3 \times 5$ , $\phi 6.3 \times 10$	$\phi 8 \times 6$ , $\phi 8 \times 8$ , $\phi 8 \times 9$ , $\phi 8 \times 11.5$ , $\phi 8 \times 16$ , $\phi 8 \times 20$	$\phi 5 \times 8$	$\phi 8 \times 6$ , $\phi 8 \times 8$ , $\phi 8 \times 9$ , $\phi 8 \times 11.5$ , $\phi 8 \times 16$ , $\phi 8 \times 20$	$\phi 10 \times 12.5$ , $\phi 10 \times 20$
Lead Forming Symbol (Nichicon P/N)		<b>JT</b>		<b>JX</b>	<b>PX</b>			<b>PX</b>	<b>TX</b>	<b>KX</b>	<b>PH</b>	
Lead Forming Symbol (FPCAP P/N)		<b>JT</b>		<b>J</b>	<b>P</b>			<b>P</b>	<b>T</b>	<b>K</b>	<b>PH</b>	
Lead Wire Diameter $\phi d$		0.45	0.6	0.5	0.5	0.45	0.6	0.5	0.6	0.6	0.6	
Tolerance		$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	$\pm 0.05$	
Lead Wire Interval $f$		2.5 +0.8/-0.2 ( $\phi 6.3$ : 2.5 $\pm 0.5$ )				5.0 +0.8/-0.2			5.0 +0.8/-0.2	2.0 +0.8/-0.2	3.5 +0.8/-0.2	5.0 +0.8/-0.2
Pitch Between Components $P$		12.7 $\pm 1.0$				12.7 $\pm 1.0$			12.7 $\pm 1.0$	12.7 $\pm 1.0$	12.7 $\pm 1.0$	12.7 $\pm 1.0$
Feed Holes Position Gap $P1$		12.7 $\pm 0.3$				12.7 $\pm 0.3$			12.7 $\pm 0.3$	12.7 $\pm 0.3$	12.7 $\pm 0.3$	12.7 $\pm 0.3$
Feed Holes Position Gap $P2$		6.35 $\pm 1.0$				6.35 $\pm 1.0$			6.35 $\pm 1.0$	6.35 $\pm 0.5$	6.35 $\pm 0.5$	6.35 $\pm 0.5$
Lead Wire Clinch Height $H0$		—				16.0 $\pm 0.5$			16.0 $\pm 0.5$	—	—	—
Components Height $H$		18.5 $\pm 0.5$				17.5 $\pm 0.5$			20.0 $\pm 0.75$	18.5 $\pm 0.5$	20.0 $\pm 0.5$	18.5 $\pm 0.5$
Base Tape $W$		18.0 +1.0/-0.5				18.0 +1.0/-0.5			18.0 +1.0/-0.5	18.0 +1.0/-0.5	18.0 +1.0/-0.5	18.0 +1.0/-0.5
Feed Holes Position Gap $W1$		9.0 $\pm 0.5$				9.0 $\pm 0.5$			9.0 $\pm 0.5$	9.0 $\pm 0.5$	9.0 $\pm 0.5$	9.0 $\pm 0.5$
Feed Holes Diameter $D0$		4.0 $\pm 0.2$				4.0 $\pm 0.2$			4.0 $\pm 0.2$	4.0 $\pm 0.2$	4.0 $\pm 0.2$	4.0 $\pm 0.2$
Components Alignment $\Delta h$		2.0 max.				2.0 max.			2.0 max.	2.0 max.	2.0 max.	2.0 max.
Tape Thickness $t$		0.6 $\pm 0.2$				0.6 $\pm 0.2$			0.6 $\pm 0.2$	0.6 $\pm 0.2$	0.6 $\pm 0.2$	0.6 $\pm 0.2$

单击下面可查看定价，库存，交付和生命周期等信息

[>>Nichicon\(尼吉康\)](#)