


New  
**BK120AAHU**  
AA size (HR 15/51)

High temperature & long life type

**U** type

**■ Dimensions (with tube)**

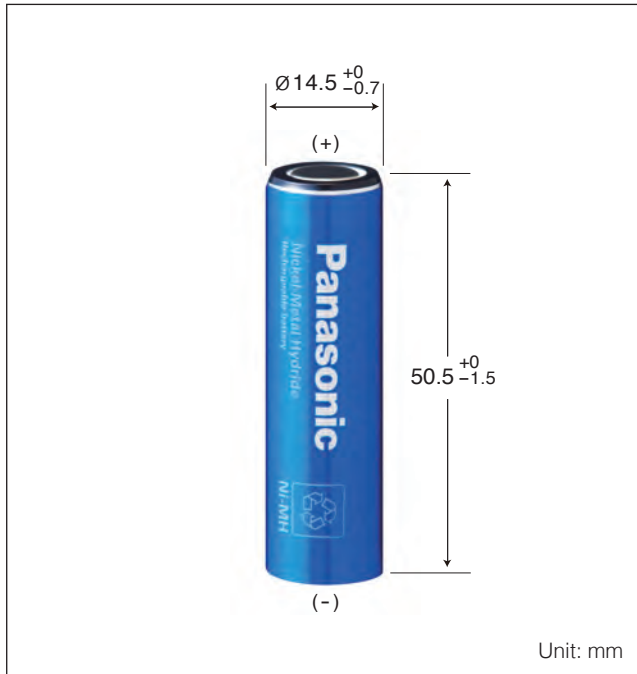

**■ Specifications**

Diameter	14.5 +0 / -0.7 mm
Height	50.5 +0 / -1.5 mm
Approximate Weight	24 g



Nominal Voltage		1.2 V
Discharge Capacity	Average <sup>*1</sup>	1280 mAh
	Rated (min.)	1200 mAh
Approx. Internal impedance at 1000Hz at charged state.		17 mΩ
Charge	Standard	120 mA X 16 hrs.
	Rapid <sup>*3</sup>	600 mA X 2.4 hrs.
	Low rate	60 mA X 32 hrs. 40 mA X 48 hrs.
Ambient Temperature	Charge	-20 °C to 75 °C
	Discharge	-20 °C to 75 °C
Storage	<1 year	-20 °C to 35 °C
	<6 months	-20 °C to 45 °C
	<1 month	-20 °C to 55 °C
	<1 week	-20 °C to 65 °C

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.  
\*2 For reference only.  
\*3 Need specially designed control system. Please contact Panasonic for details.


Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

**■ Typical charge characteristics**

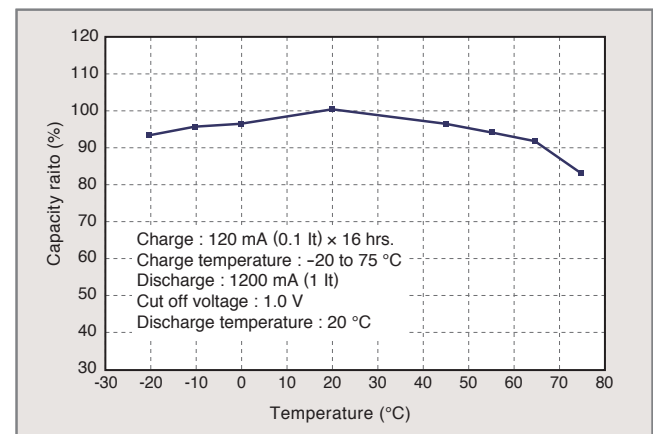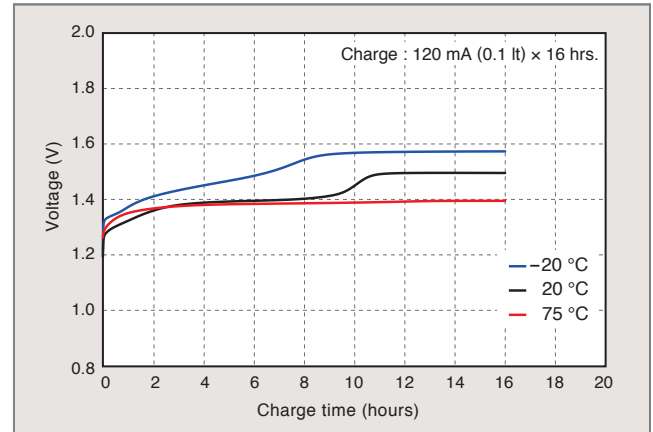

**■ Typical discharge characteristics**

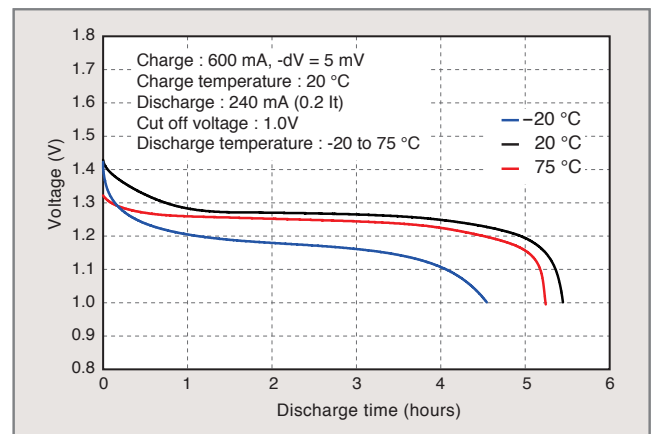

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)