

mm inch

### FEATURES

- **Small size**

The smallest double make type relay  
12.0(W)×15.5(L)×13.9(H) mm  
.472(W)×.610(L)×.547(H) inch

- **Pattern design simplification**


Simplified pattern design is possible because, while double make construction is employed, the external COM terminal is single.

- **Standard terminal pitch employed**

The terminal array used is identical to that used in JJM relays(1c type).

- **Plastic sealed type**

Plastically sealed for automotive cleaning.



<Schematic>

RoHS Directive compatibility information  
<http://www.nais-e.com/>

## SPECIFICATIONS

Contact		Characteristics	
Arrangement	Double make contact	Max. operating speed (at nominal switching capacity)	4 cpm
Contact material	Ag alloy (Cadmium free)	Initial insulation resistance*2	Min. 100 MΩ (at 500 V DC)
Initial contact resistance (Initial) (By voltage drop 6V DC 1A)	Typ. 10 mΩ	Initial breakdown voltage*3	Between open contacts: 500 Vrms for 1min. Between contact and coil: 500 Vrms for 1min.
Contact voltage drop	Max. 0.25V (at 2 × 6A)	Operate time*4 (at nominal voltage)(at 20°C 68°F)	Max. 10 ms (Initial)
Rating	Nominal switching capacity	12A 14V DC (at 2 × 6A, lamp load)	Release time (without diode)*4 (at nominal voltage)(at 20°C 68°F)
	Max. carrying current	2 × 6A (12V, at 20°C 68°F), 2 × 4A (12V, at 85°C 185°F)	
	Min. switching capacity#1	1A 12V DC	
Expected life (min. operations)	Mechanical (at 120cpm)	Min. 10 <sup>7</sup>	Shock resistance
	Electrical (lamp load)	Min. 10 <sup>5*1</sup>	
Coil		Vibration resistance	Conditions in case of operation, transport and storage*9 (Not freezing and condensing at low temperature)
Nominal operating power	1,000 mW		
Remarks		Functional*5	Min. 100 m/s <sup>2</sup> {10 G}
#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.		Destructive*6	Min. 1,000 m/s <sup>2</sup> {100 G}
#2 Measurement at same location as "initial breakdown voltage" section.		Functional*7	10 Hz to 100 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
#3 Detection current: 10mA		Destructive*8	10 Hz to 500 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
#4 Excluding contact bounce time.		Ambient temp.	-40°C to +85°C -40°F to +185°F
#5 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs		Humidity	5% R.H. to 85% R.H.
#6 Half-wave pulse of sine wave: 6 ms		Mass	Approx. 5 g .176 oz
#7 Detection time: 10 μs			
#8 Time of vibration for each direction; X, Y direction: 2 hours Z direction: 4 hours			



\*9 Refer to Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT  
Please inquire if you will be using the relay in a high temperature atmosphere (110°C 230°F).

## TYPICAL APPLICATIONS ORDERING INFORMATION

Car alarm system flashing lamp etc.

Ex. JJM	2w	12V
Contact arrangement	Coil voltage (DC)	
Double make contact	12V	

Standard packing: Carton(tube package) 50pcs. Case: 1,000pcs.


## TYPES AND COIL DATA (at 20°C 68°F)

### • Single side stable type


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (Initial)	Drop-out voltage, V DC (Initial)	Coil resistance $\Omega$	Nominal operating current, mA	Nominal operating power, mW	Usable voltage range, V DC
JJM2w-12V	12	Max. 6.9	Min. 1.0	144 $\pm$ 10%	83.3 $\pm$ 10%	1,000	10 to 16

## DIMENSIONS


mm inch

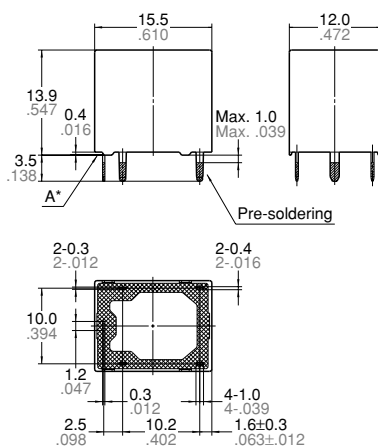

Schematic (Bottom view)



PC board pattern (Bottom view)




Tolerance:  $\pm 0.1 \pm .004$

<b>Dimension:</b>	<b>General tolerance</b>
Max. 1mm .039 inch:	$\pm 0.1 \pm .004$
1 to 3mm .039 to .118 inch:	$\pm 0.2 \pm .008$
Min. 3mm .118 inch:	$\pm 0.3 \pm .012$

\* Dimensions (thickness and width) of terminal in this catalog is measured before pre-soldering. Intervals between terminals is measured at A surface level.

## EXAMPLE OF CIRCUIT


Control circuit for signal lights (security system)

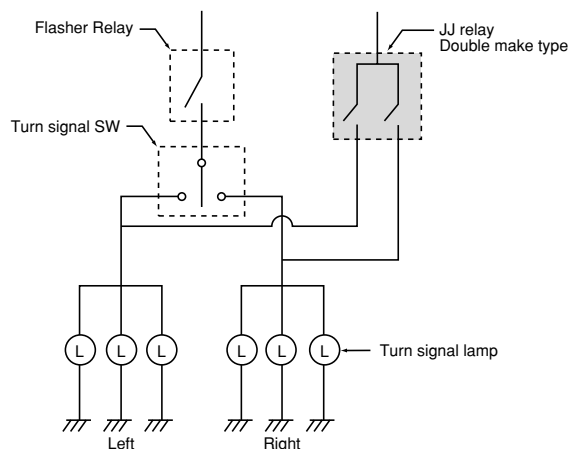


## REFERENCE DATA

### 1. Coil temperature rise

Sample: JJM2w-12V, 6pcs.  
Point measured: Inside the coil  
Contact carrying current: 2  $\times$  6A, 2  $\times$  4A  
Ambient temperature: Room temperature, 85°C 185°F

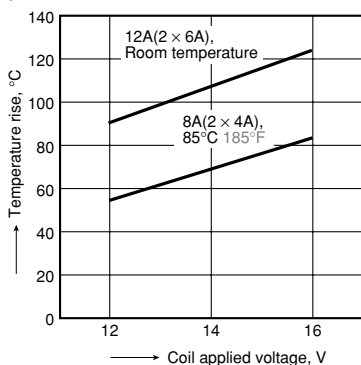


### 2. Ambient temperature and operating voltage range

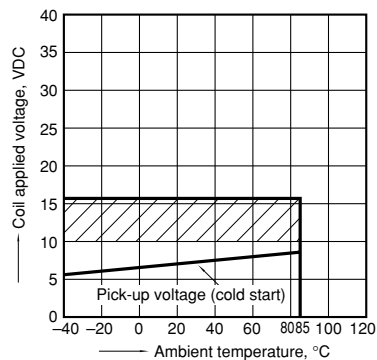

### 3. Distribution of pick-up and drop-out voltage


Sample: JJM2W-12V, 50pcs.

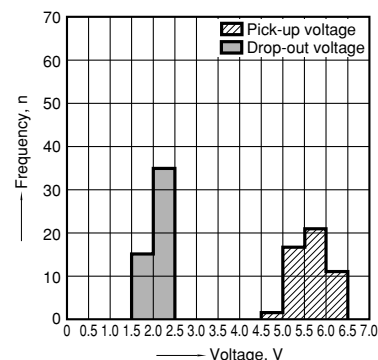

# JJ-M(2w)

## 4. Distribution of operate time


Sample: JJM2W-12V, 50pcs.

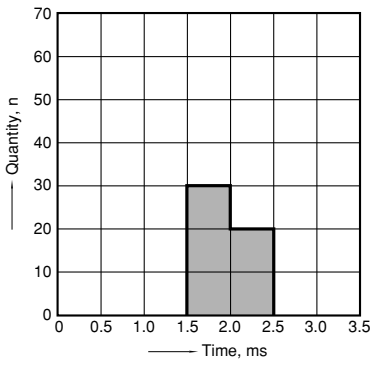

## 5. Distribution of release time

Sample: JJM2W-12V, 50pcs.

\* Without diode

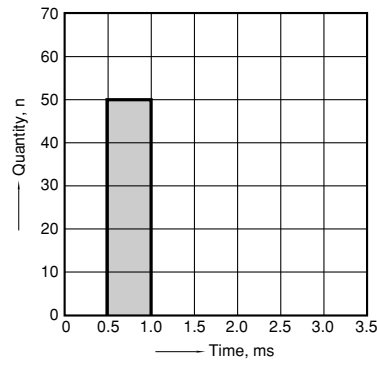

## 6. Electrical life test (Lamp load)


Sample: JJM2W-12V, 6pcs.

Load: 5.5A, inrush 48A, 6 × 21W

Operating frequency: (ON : OFF = 1s : 14s)

Ambient temperature: Room temperature


Circuit:

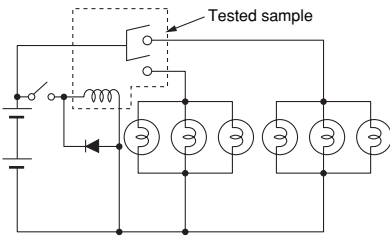


Load current waveform

Current value per contact on one side


Inrush current: 48A, Steady current: 5.5A

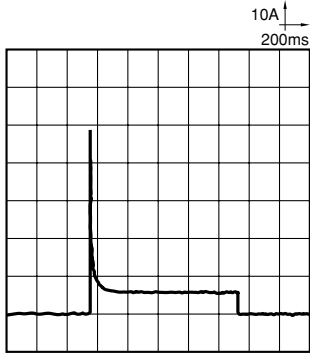

## Change of pick-up and drop-out voltage

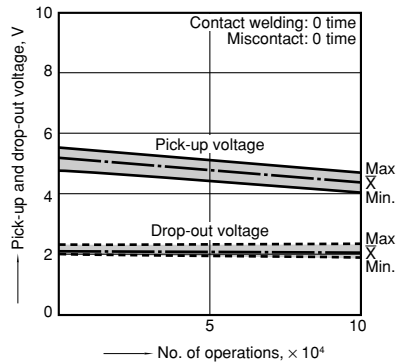

## Change of contact resistance

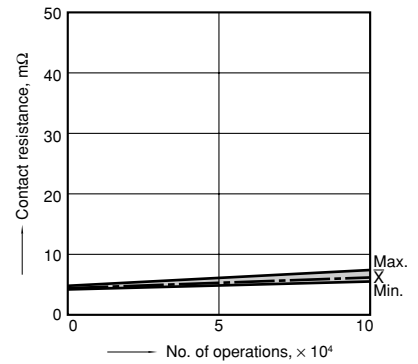

**For Cautions for Use, see Relay Technical Information.**

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)