
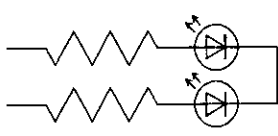
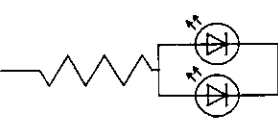
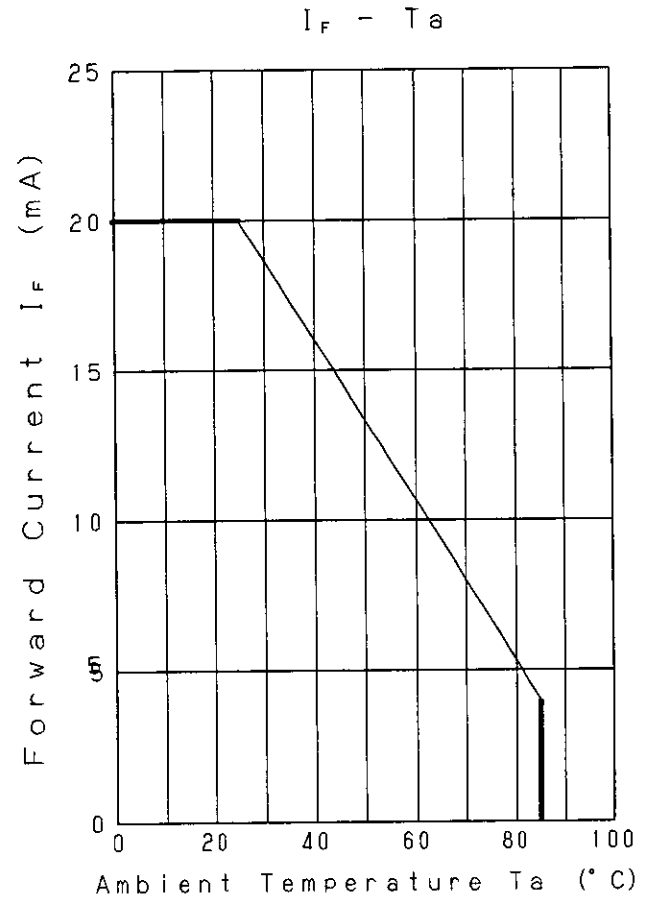
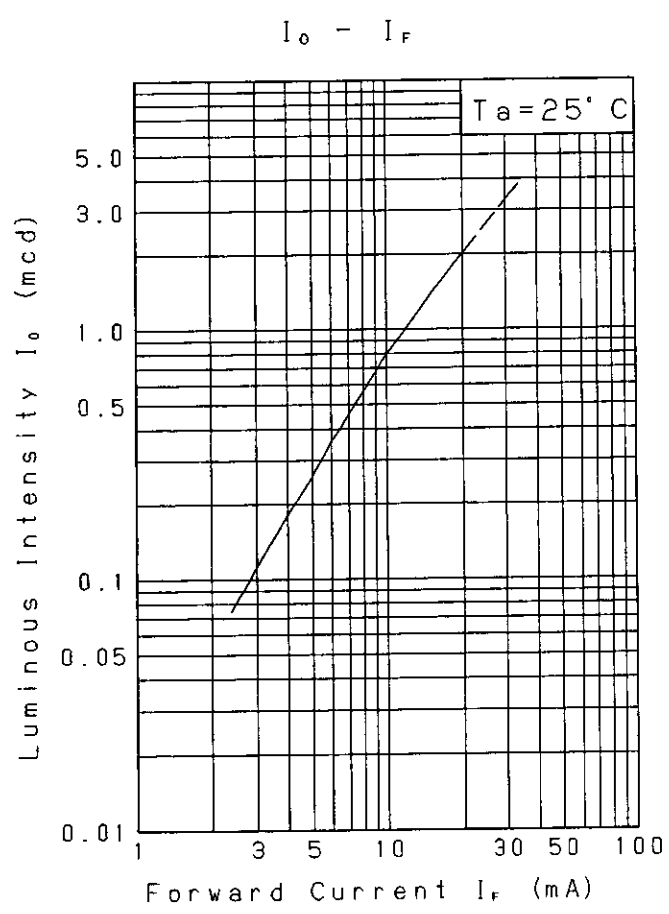
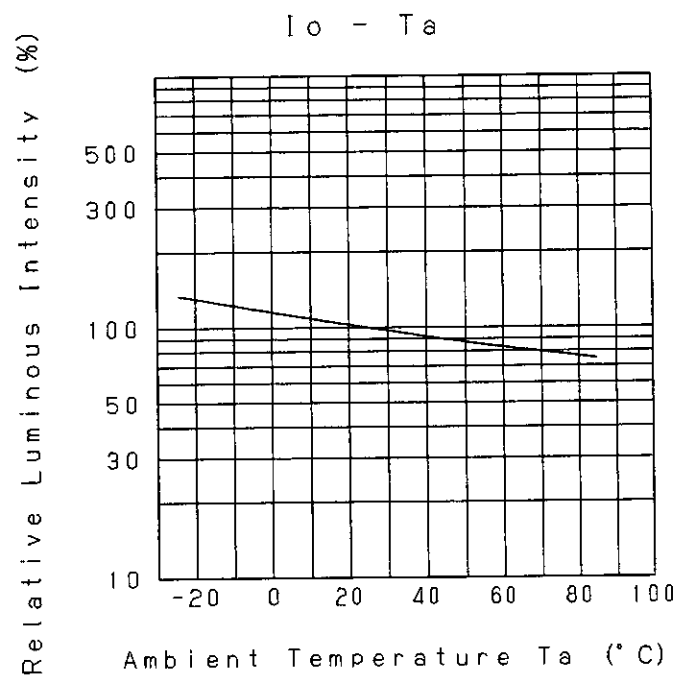



Approved	Checked	Designed	DEVELOPMENT SPECIFICATION							
		<i>K. Oshiro</i>	Tentative							
			<u>P/N: LN J 8 0 6 K 5 SUX</u>							
T Y P E		Soft Orange Light Emitting Diode								
A P P L I C A T I O N		Indicators								
M A T E R I A L		GaAsP								
O U T L I N E		Attached								
A B S O L U T E M A X I M U M R A T I N G S		P	※ I <sub>FP</sub>	I <sub>FDC</sub>	V <sub>R</sub>	Topr	Tstg			
		60	60	20	3	-25~+85	-30~+100			
		mW	mA	mA	V	°C	°C			
C O N D I T I O N		T <sub>a</sub> = 25 ± 3 °C								
T e s t   S p e c i f i c a t i o n										
I t e m	S y m b o l	C o n d i t i o n	T y p	L i m i t		U n i t				
				Min	Max					
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	1.93		2.6	V				
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 3 V			10	μA				
Luminous Intensity	I <sub>O</sub>	I <sub>F</sub> = 10 mA · DC	0.8	0.3		mcd				
Peak Emission Wavelength	λ <sub>p</sub>	I <sub>F</sub> = 10 mA · DC	610			nm				
Spectral Line Half Width	Δλ	I <sub>F</sub> = 10 mA · DC	40			nm				
<p>※ · The Condition of I<sub>FP</sub> is duty 10 %, Pulse width 1 ms</p> <p>· Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.</p> <p>NOTE</p> <p>1. Compositions of the lead ... Cu/Ni/Au plating</p> <p>2. Soldering conditions. Refer to Handling note.</p> <p>3. Care should be taken that soldering is done within 3-days after opening the dry package and reel.</p> <p>4. Package: Light yellow diffusion type.</p> <p>5. Circuit to operate LED.</p>										
							<p>(A) Recommended circuit.</p> <p>(B) The difference of brightness between the LED could be found due to the V<sub>F</sub> characteristics of each LED.</p>			
Oct. 27. 2001										

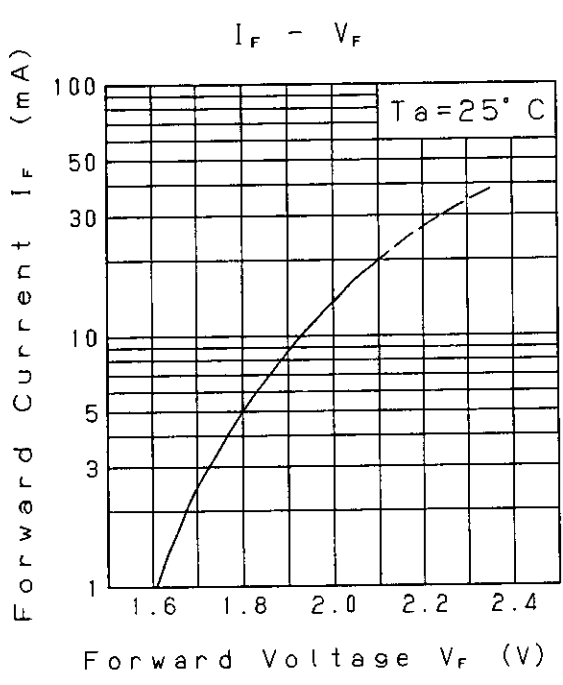


Oct. 27. 2001			
---------------	--	--	--

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION			
		<i>K. Oshida</i>		P/N:LNJ806K5SUX		

Relative Luminous Intensity  
Wavelength Characteristics



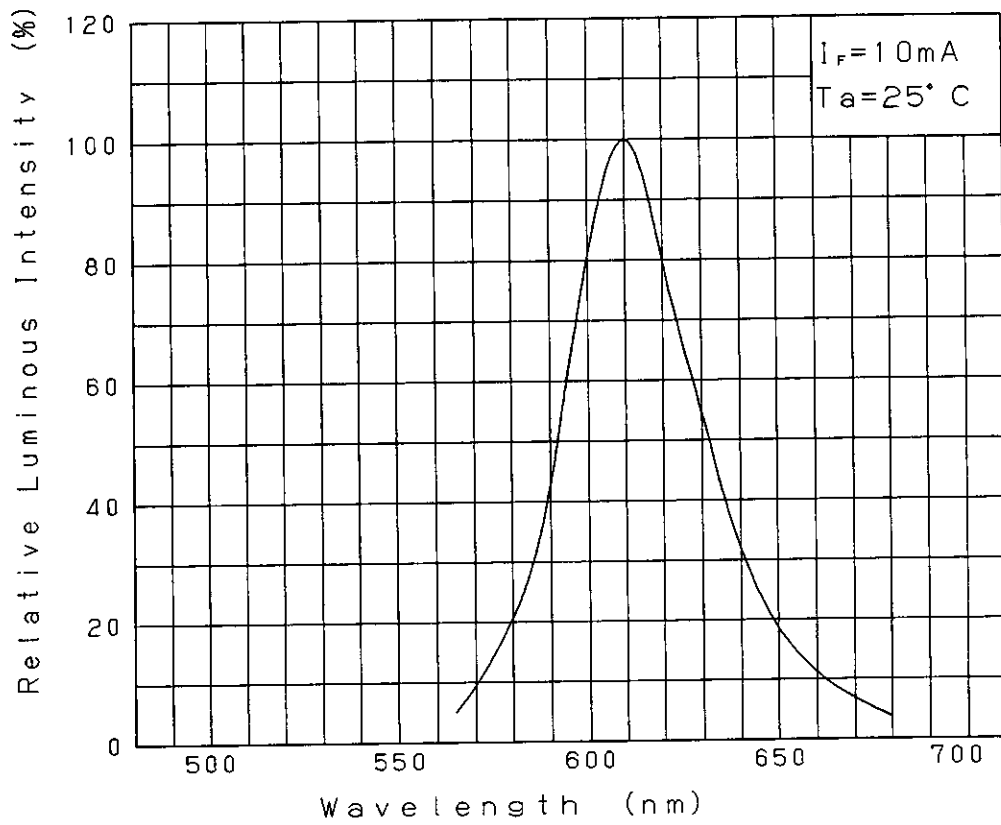


Derective Characteristics

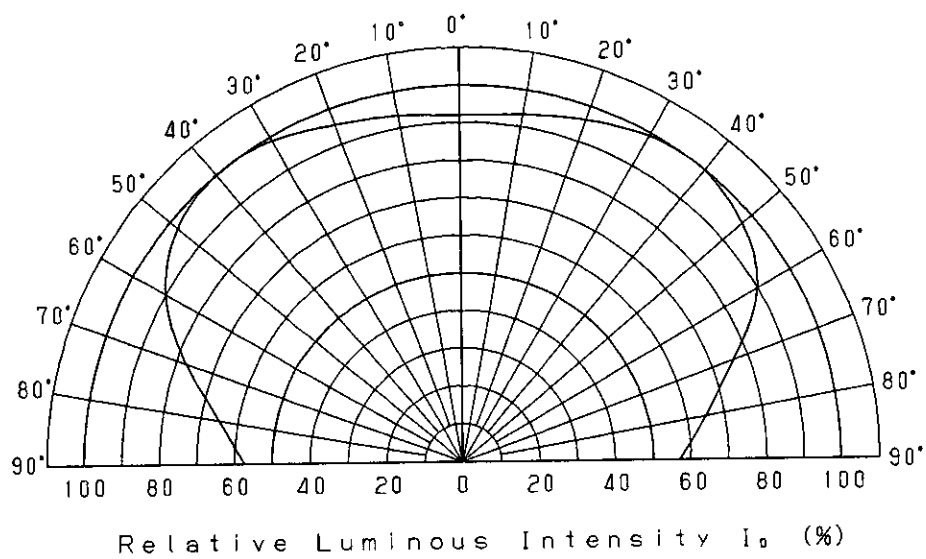

Oct. 27. 2001			
---------------	--	--	--

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION (OUTLINE)	P/N: _____
		<i>K. Ozawa</i>		

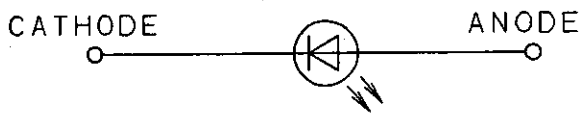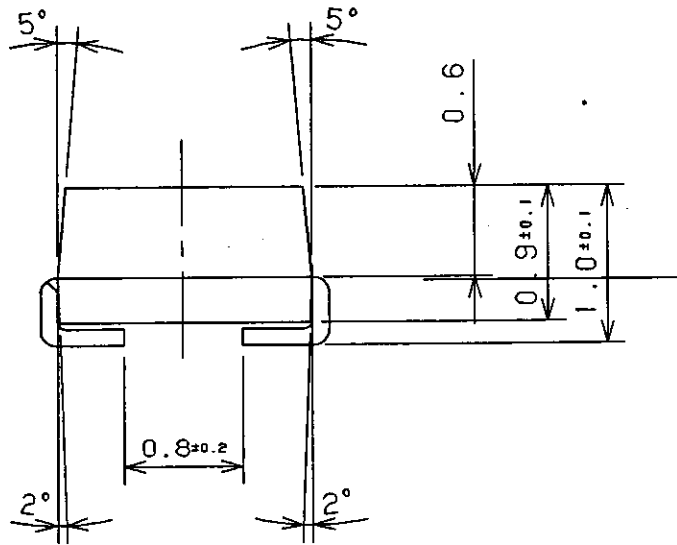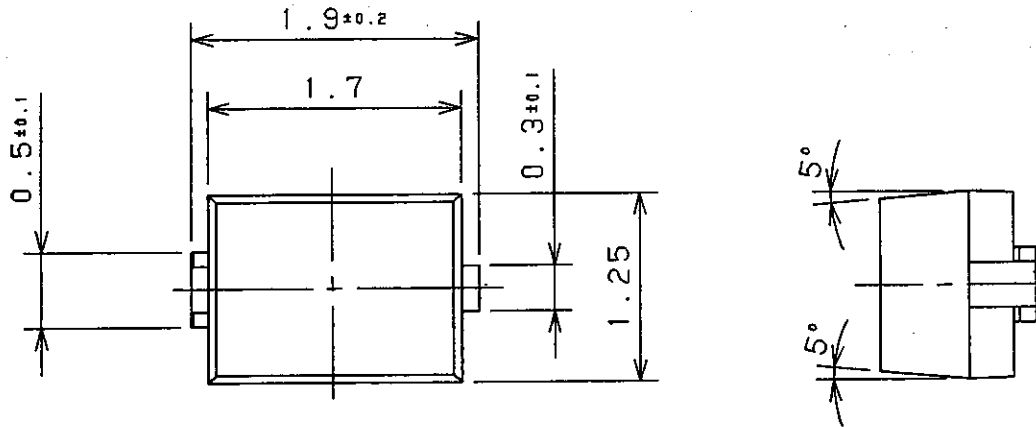

(NOTE)

1. Unit: mm
2. Tolerance unless specified is  $\pm 0.2$ .
3. Measurement of the Package doesn't include gete projection.
4. Corner of the package is R 0.2max.
5. Projection's tolerance of the package is R 0.2max.

Oct. 27. 2001		

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)