


Omnidirectional Electret Condenser Microphone Cartridge


WM-63PR

- Very small, thin type omnidirectional microphone
 - Most suited to products having limited space
 - Better-shielded, RF-noise resistant type
- WM-63PR - Dual Band.

Appearance WM-63PR




Typical Frequency Response Curve

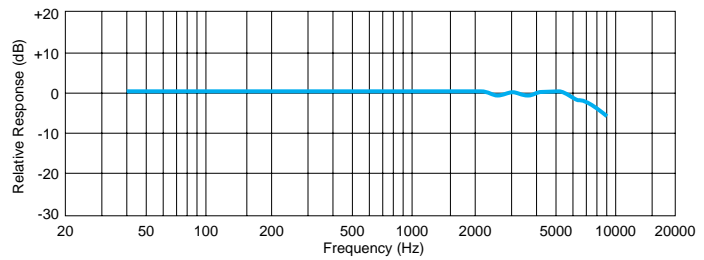

Dimensional Drawing WM-63PR

Unit: mm

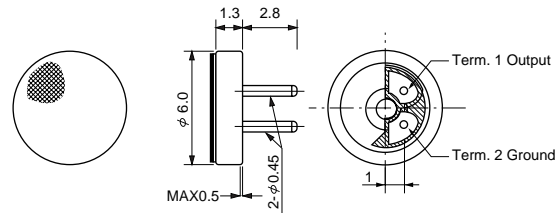

Sensitivity

$V_s = 2.0V$
 $R_L = 2.2k\Omega$

$-45 \pm 4dB$

(X: $-46 \pm 3dB$)
(T: $-44 \pm 3dB$)

Specifications WM-63PR

Sensitivity:	$-45 \pm 4dB$ (0dB=1V/Pa, 1kHz)
Impedance:	Less than 2.2k Ω
Directivity:	Omnidirectional
Frequency:	20-16,000Hz
Max. operation voltage:	10V
Standard operation voltage:	2V
Current consumption:	Max. 0.5mA
Sensitivity reduction:	Within $-3dB$ at 1.5V
S/N ratio:	More than 58dB

Weight and dimensions are approximate.
Specifications are subject to change without notice.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)