




**DIP6-pin type
with wide variation
Low on-resistance**

PhotoMOS®

**HF 1 Form A
(AQV10○, 20○)**

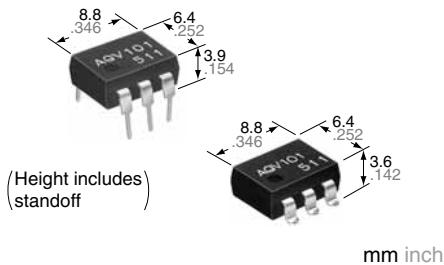


FEATURES

- 1. Controls low-level analog signals**
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- 2. Controlled with low-level input signals**
- 3. AC/DC dual use type and DC only type available.**

TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computers

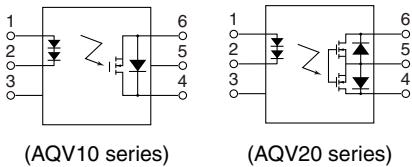

RoHS compliant

TYPES

1. DC type (AQV10 series)

	Output rating*		Package	Part No.			Packing quantity	
				Through hole terminal		Surface-mount terminal		
	Load voltage	Load current		Tube packing style		Tape and reel packing style	Tube	Tape and reel
DC only	40 V	700 mA	DIP6-pin	AQV101	AQV101A	AQV101AX	AQV101AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs. 1,000 pcs
	60 V	600 mA		AQV102	AQV102A	AQV102AX	AQV102AZ	
	250 V	300 mA		AQV103	AQV103A	AQV103AX	AQV103AZ	
	400 V	180 mA		AQV104	AQV104A	AQV104AX	AQV104AZ	

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

2. AC/DC type (AQV20 series)

	Output rating*		Package	Part No.			Packing quantity	
				Through hole terminal		Surface-mount terminal		
	Load voltage	Load current		Tube packing style		Tape and reel packing style	Tube	Tape and reel
AC/DC dual use	40 V	500 mA	DIP6-pin	AQV201	AQV201A	AQV201AX	AQV201AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs. 1,000 pcs
	60 V	400 mA		AQV202	AQV202A	AQV202AX	AQV202AZ	
	250 V	200 mA		AQV203	AQV203A	AQV203AX	AQV203AZ	
	400 V	150 mA		AQV204	AQV204A	AQV204AX	AQV204AZ	

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

HF 1 Form A (AQV10○, 20○)

RATING

1. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Remarks
Input	LED forward current	I _F	50 mA				
	LED reverse voltage	V _R	10 V				
	Peak forward current	I _{FP}	1 A				
	Power dissipation	P _{in}	150 mW		f = 100 Hz, Duty factor = 0.1%		
Output	Load voltage (DC)	V _L	40 V	60 V	250 V	400 V	
	Continuous load current (DC)	I _L	0.7 A	0.6 A	0.3 A	0.18 A	
	Peak load current	I _{peak}	1.8 A	1.5 A	0.6 A	0.5 A	100 ms (1 shot)
	Power dissipation	P _{out}	360 mW				
Total power dissipation		P _T	410 mW				
I/O isolation voltage		V _{iso}	1,500 V (AC)				
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures		
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Condition
Input	LED operate current	Typical	I _{Fon}	2.3 mA			
				5 mA		I _L = Max.	
	LED turn off current	Minimum	I _{off}	0.8 mA			
		Typical		2.2 mA		I _L = Max.	
Output	LED dropout voltage	Typical	V _F	2.3 V			
		Maximum		3 V		I _F = 10 mA	
	On resistance	Typical	R _{on}	0.3 Ω	0.37 Ω	2.7 Ω	6.3 Ω
		Maximum		0.5 Ω	0.7 Ω	4 Ω	8 Ω
Transfer characteristics	Off state leakage current	Maximum	I _{Leak}	1 μA		I _F = 0 mA, V _L = Max.	
	Turn on time*	Typical	T _{on}	0.23 ms	0.22 ms	0.13 ms	0.09 ms
		Maximum		1 ms		I _F = 10 mA I _L = Max.	
	Turn off time*	Typical	T _{off}	0.07 ms		0.08 ms	I _F = 10 mA I _L = Max.
		Maximum		1 ms			
	I/O capacitance	Typical	C _{iso}	1.3 pF		f = 1 MHz V _B = 0 V	
		Maximum		3 pF			
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ		500 V DC	

2. AC/DC type


1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED forward current	I _F		50 mA					
	LED reverse voltage	V _R		10 V					
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%			
	Power dissipation	P _{in}		150 mW					
Output	Load voltage (peak AC)	V _L		40 V	60 V	250 V	400 V		
	Continuous load current	I _L		0.5 A	0.4 A	0.2 A	0.15 A	A connection: Peak AC, DC B, C connection: DC	
				0.7 A	0.6 A	0.3 A	0.18 A		
	Peak load current	I _{peak}		1.0 A	0.8 A	0.4 A	0.25 A	A connection 100 ms (1 shot) V _L = DC	
Transfer characteristics	Power dissipation	P _{out}		360 mW					
	Total power dissipation	P _T		410 mW					
	I/O isolation voltage	V _{iso}		1,500 V AC					
	Temperature limits	Operating		-40°C to +85°C -40°F to +185°F		Non-condensing at low temperature			
		Storage		-40°C to +100°C -40°F to +212°F					

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks		
Input	LED operate current	Typical	I _{Fon}	—	2.4 mA			I _L = Max.	I _F = 10 mA		
		Maximum			5 mA						
	LED turn off current	Minimum		I _{Foff}	0.8 mA			I _L = Max.			
		Typical			2.2 mA						
Output	LED dropout voltage	Typical	V _F	—	2.3 V			I _F = 10 mA			
		Maximum			3 V						
	On resistance	Typical	R _{on}	A	0.6 Ω	0.74 Ω	5.5 Ω	12.4 Ω	I _F = 10 mA		
		Maximum			1 Ω	1.4 Ω	8 Ω	16 Ω	I _L = Max. Within 1 s on time		
		Typical	R _{on}	B	0.3 Ω	0.37 Ω	2.7 Ω	6.2 Ω	I _F = 10 mA		
		Maximum			0.5 Ω	0.7 Ω	4 Ω	8 Ω	I _L = Max. Within 1 s on time		
Transfer characteristics	Typical	Typical	R _{on}	C	0.15 Ω	0.18 Ω	1.4 Ω	3.1 Ω	I _F = 10 mA		
		Maximum			0.25 Ω	0.35 Ω	2 Ω	4 Ω	I _L = Max. Within 1 s on time		
	Off state leakage current	Maximum	I _{Leak}	—	1 μA			I _F = 0 mA, V _L = Max.	I _F = 10 mA I _L = Max.		
	Turn on time*	Typical	T _{on}	—	0.38 ms	0.41 ms	0.21 ms	0.18 ms			
	Turn on time*	Maximum			1 ms			I _F = 10 mA I _L = Max.			
	Turn off time*	Typical	T _{off}	—	0.08 ms			0.07 ms			
	Turn off time*	Maximum			1 ms			f = 1 MHz V _B = 0 V	I _F = 10 mA I _L = Max.		
	I/O capacitance	Typical	C _{iso}	—	1.3 pF						
	I/O capacitance	Maximum			3 pF			f = 1 MHz V _B = 0 V			
	Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ						

*Turn on/Turn off time

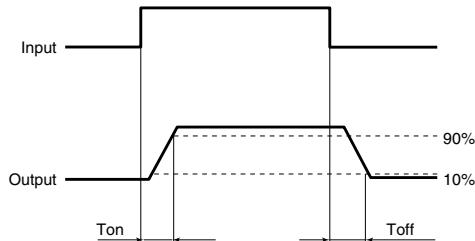**RECOMMENDED OPERATING CONDITIONS**


Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	10	mA


■ These products are not designed for automotive use.**If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.**

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics (DC type)
Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

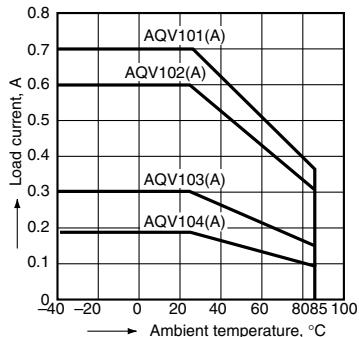


2.-(2) On resistance vs. ambient temperature characteristics (DC type: AQV103, AQV104)
LED current: 10 mA;
Continuous load current: Max. (DC)

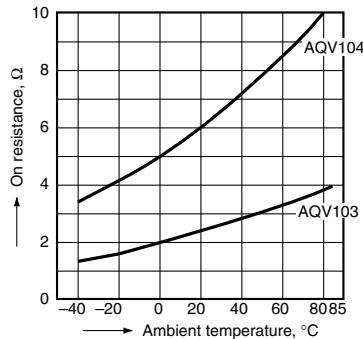


3.-(1) Turn on time vs. ambient temperature characteristics (DC type)
LED current: 10 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

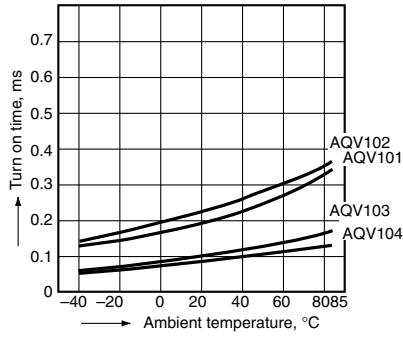


4.-(2) Turn off time vs. ambient temperature characteristics (AC/DC type)
LED current: 10 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

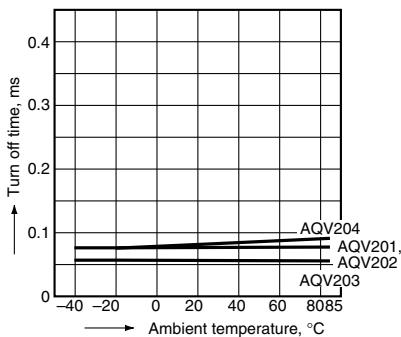


5.-(1) LED operate/turn off current vs. ambient temperature characteristics (DC type)
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

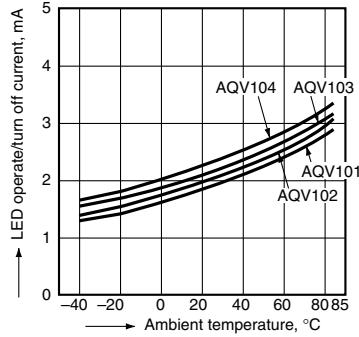


5.-(2) LED operate/turn off current vs. ambient temperature characteristics (AC/DC type)
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

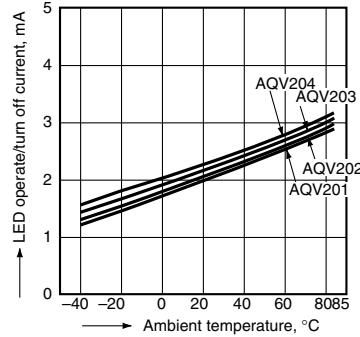


6. LED dropout voltage vs. ambient temperature characteristics
 Sample: All types
 LED current: 10 to 50 mA

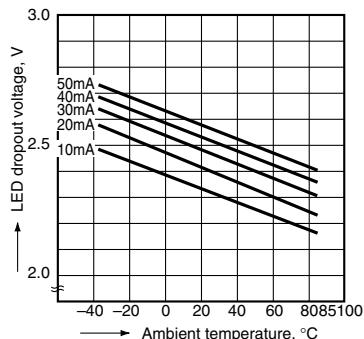


7.-1) Current vs. voltage characteristics of output at MOS portion (DC type)
 Ambient temperature: 25°C 77°F

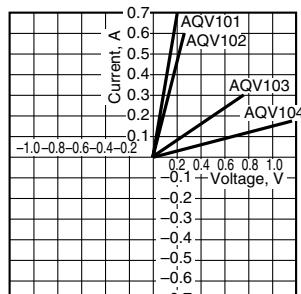


7.-2) Current vs. voltage characteristics of output at MOS portion (AC/DC type)
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

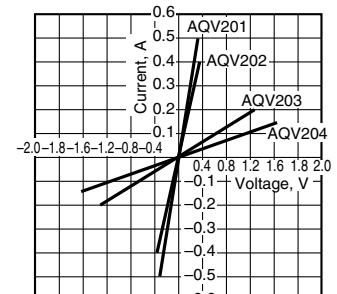


8. Off state leakage current vs. load voltage characteristics
 Sample: AQV204;
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

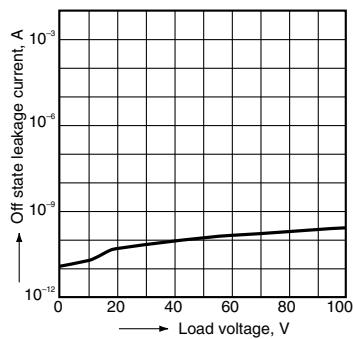


9.-1) Turn on time vs. LED forward current characteristics (DC type)
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC);
 Ambient temperature: 25°C 77°F

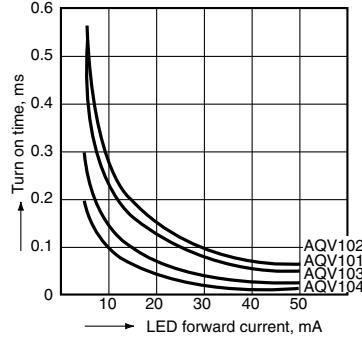


9.-2) Turn on time vs. LED forward current characteristics (AC/DC type)
 Measured portion: between terminals 4 and 6;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC);
 Ambient temperature: 25°C 77°F

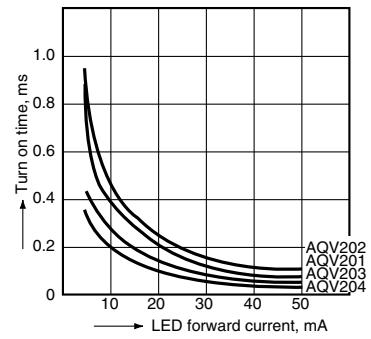


10.-1) Turn off time vs. LED forward current characteristics (DC type)
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC);
 Ambient temperature: 25°C 77°F

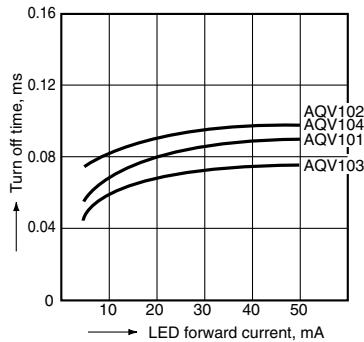


10.-2) Turn off time vs. LED forward current characteristics (AC/DC type)
 Measured portion: between terminals 4 and 6;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC);
 Ambient temperature: 25°C 77°F

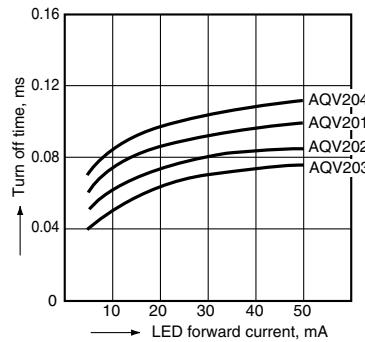

11.-1) Output capacitance vs. applied voltage characteristics (DC type)
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

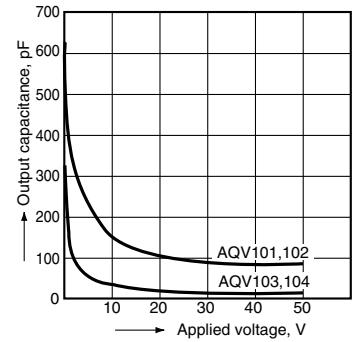

11.-2) Output capacitance vs. applied voltage characteristics (AC/DC type)
 Measured portion: between terminals 4 and 6;
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

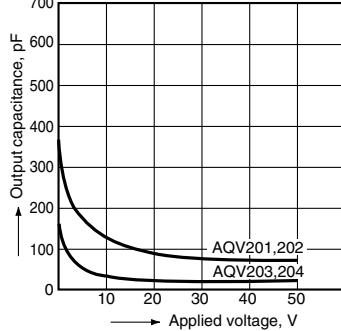



电子元器件线上授权代理开拓者
原厂授权 · 正品现货 · 一件即发

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)