



### SURFACE MOUNT SILICON ZENER DIODES


VOLTAGE 5.1 Volt POWER 500 mWatt


### **FEATURES**

- · Planar Die construction
- · 500mW Power Dissipation
- · Ideally Suited for Automated Assembly Processes
- Lead free in comply with EU RoHS 2011/65/EU directives
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### **MECHANICAL DATA**

- · Case: SOD-323HE, Molded Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- · Polarity: See Diagram Below
- · Approx. Weight: 0.0006 ounce, 0.0185 gram



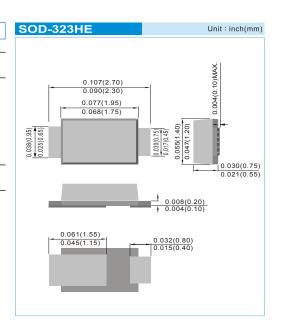

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Maximum Power Dissipation (Notes A)	$P_{\scriptscriptstyle D}$	500	mW
Typical Thermal Resistance (Notes A)	$R_{_{\theta JA}} \ R_{_{\theta JL}}$	250 150	°C/W
Operating Junction and Storage Temperature Range	T <sub>J</sub> ,T <sub>STG</sub>	-55 to +150	°C

Dort Niveshoo	Nominal Zener Voltage			Max. Zener Impedance	Max Reverse Leakage Current		Marking
Part Number		Vz @ Izт		Izt IR @ VR			Marking Code
	Nom. V	Min. V	Max. V	mA	μΑ	V	
MMSZ4689HEWS	5.1	4.85	5.36	0.05	10	3	HCU

### NOTES

A. Mounted FR-5 PCB with minimum recommend pad layout.(PJ\_004 REV.0)





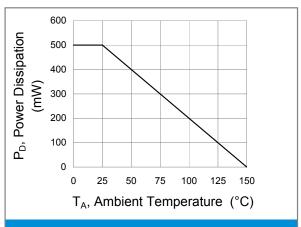


Fig.1 Steady-State Power Derating Curve

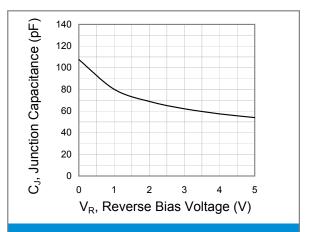


Fig.2 Typical Junction Capacitance

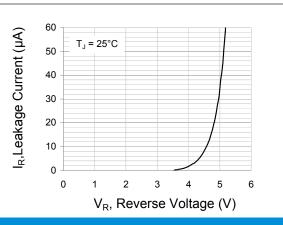


Fig.3 Typical Leakage Characteristics

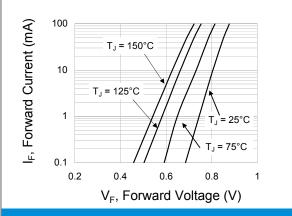


Fig.4 Typical Forward Characteristics


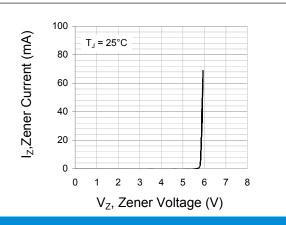


Fig.5 Typical Zener Characteristics





### MOUNTING PAD LAYOUT

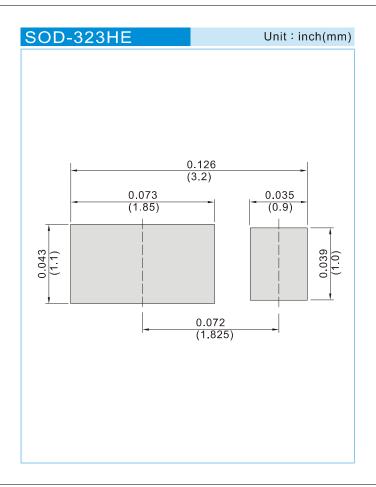

### **ORDER INFORMATION**

• Packing information

T/R - 12K per 13" plastic Reel

T/R - 5K per 7" plastic Reel





# Part No\_packing code\_Version

MMSZ4689HEWS\_R1\_00001 MMSZ4689HEWS\_R2\_00001

# For example : RB500V-40\_R2\_00001 Part No. Serial number Version code means HF Packing size code means 13" Packing type means T/R

Packing Code XX					Version Code XXXXX			
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1st Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code		
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number		
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number		
Bulk Packing (B/P)	В	13"	2					
Tube Packing (T/P)	Т	26mm	X					
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y					
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U					
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D					





# **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
  of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
   Customers are responsible in comprehending the suitable use in particular applications.
   Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

# 单击下面可查看定价,库存,交付和生命周期等信息

>>Panjit(强茂)