



2EZ6.8~2EZ51

SILICON ZENER DIODES

VOLTAGE 6.8 to 51 Volt **POWER** 2 Watt



DO-15 Unit : inch(mm)

FEATURES

- Low inductance
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- High temperature soldering : 260°C /10 seconds at terminals
- Lead free in compliance with EU RoHS 2011/65/EU directive

MECHANICAL DATA

- Case: JEDEC DO-15, Molded plastic over passivated junction
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Standard packing: 52mm tape
- Weight: 0.014 ounce, 0.0397 gram

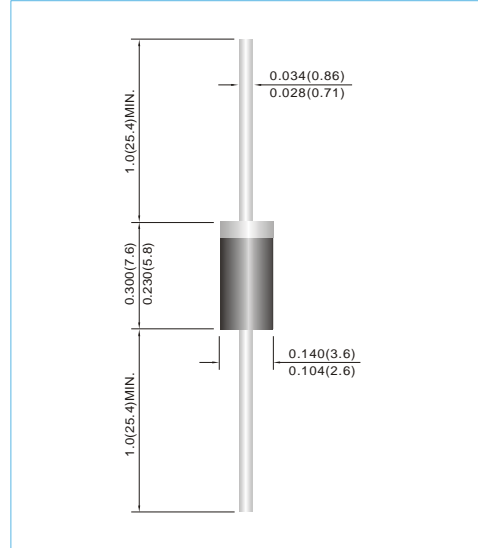

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Max Steady State Power Dissipation @ $T_L \leq 80^\circ\text{C}$ (Note A) Derate above $T_A=25^\circ\text{C}$	P_D	2	Watts
Peak Forward Surge Current 8.3ms single half sine-wave soperimposed on rated load	I_{FSM}	15	Amps
Thermal resistance Junction to Ambient Junction to Lead	$R_{\theta JA}$ $R_{\theta JL}$	60 32	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150	$^\circ\text{C}$

NOTE:

A.Mounted on infinite heat sink with L=2mm

B.Measured on 8.3ms, and single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum



2EZ6.8~2EZ51

Part Number	Nominal Zener Voltage			Maximum Zener Impedance				Leakage Current		Marking Code
	V _Z @ I _{ZT}			Z _{ZT} @ I _{ZT}		Z _{ZK} @ I _{ZK}		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	uA	V	
2.0 Watt ZENER										
2EZ6.8	6.8	6.46	7.14	2	73.5	700	1	5	4	2EZ6.8
2EZ7.5	7.5	7.13	7.88	2	66.5	700	0.5	5	5	2EZ7.5
2EZ8.2	8.2	7.79	8.61	2	61	700	0.5	5	6	2EZ8.2
2EZ8.7	8.7	8.27	9.14	2	58	700	0.5	4	6.6	2EZ8.7
2EZ9.1	9.1	8.65	9.56	3	55	700	0.5	3	7	2EZ9.1
2EZ10	10	9.5	10.5	4	50	700	0.25	3	7.6	2EZ10
2EZ11	11	10.45	11.55	4	45.5	700	0.25	1	8.4	2EZ11
2EZ12	12	11.4	12.6	5	41.5	700	0.25	1	9.1	2EZ12
2EZ13	13	12.35	13.65	5	38.5	700	0.25	0.5	9.9	2EZ13
2EZ14	14	13.3	14.7	6	35.7	700	0.25	0.5	10.6	2EZ14
2EZ15	15	14.25	15.75	7	33.4	700	0.25	0.5	11.4	2EZ15
2EZ16	16	15.2	16.8	8	31.2	700	0.25	0.5	12.2	2EZ16
2EZ17	17	16.15	17.85	9	29.4	750	0.25	0.5	13	2EZ17
2EZ18	18	17.1	18.9	10	27.8	750	0.25	0.5	13.7	2EZ18
2EZ19	19	18.05	19.95	11	26.3	750	0.25	0.5	14.4	2EZ19
2EZ20	20	19	21	11	25	750	0.25	0.5	15.2	2EZ20
2EZ22	22	20.9	23.1	12	22.8	750	0.25	0.5	16.7	2EZ22
2EZ24	24	22.8	25.2	13	20.8	750	0.25	0.5	18.2	2EZ24
2EZ25	25	23.75	26.25	14	20	750	0.25	0.5	19	2EZ25
2EZ27	27	25.65	28.35	18	18.5	750	0.25	0.5	20.6	2EZ27
2EZ28	28	26.6	29.4	18	17	750	0.25	0.5	21.3	2EZ28
2EZ30	30	28.5	31.5	20	16.6	1000	0.25	0.5	22.5	2EZ30
2EZ33	33	31.35	34.65	23	15.1	1000	0.25	0.5	25.1	2EZ33
2EZ36	36	34.2	37.8	25	13.9	1000	0.25	0.5	27.4	2EZ36
2EZ39	39	37.05	40.95	30	12.8	1000	0.25	0.5	29.7	2EZ39
2EZ43	43	40.85	45.15	35	11.6	1500	0.25	0.5	32.7	2EZ43
2EZ47	47	44.65	49.35	40	10.6	1500	0.25	0.5	35.8	2EZ47
2EZ51	51	48.45	53.55	48	9.8	1500	0.25	0.5	38.8	2EZ51



2EZ6.8~2EZ51

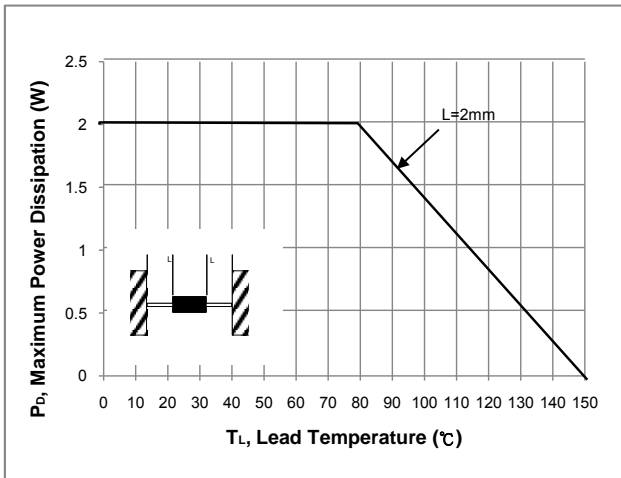


Fig.1 Power Temperature Derating Curve

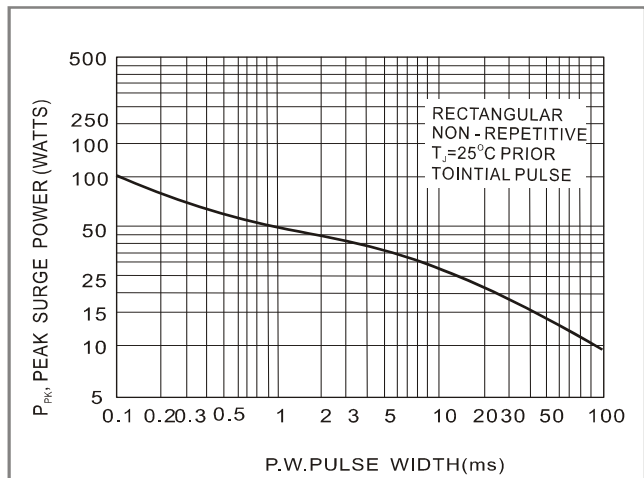


FIGURE 2. MAXIMUM SURGE POWER

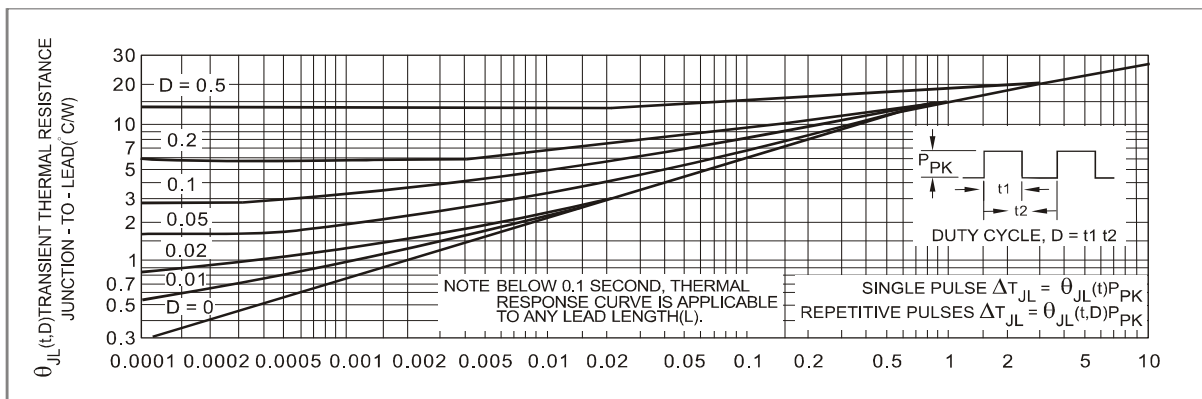


FIGURE 3. TYPICAL THERMAL RESPONSE,

APPLICATION NOTE:

Since the actual voltage available from a given zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature, T_L , should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

θ_{LA} is the lead-to-ambient thermal resistance ($^{\circ}\text{C}/\text{W}$) and P_D is the power dissipation. The value for θ_{LA} will vary and depends on the device mounting method. θ_{LA} is generally 30-40 $^{\circ}\text{C}/\text{W}$ for the various clips and tie points in common use and for printed circuit board wiring.

The temperature of the lead can also be measured using a thermocouple placed on the lead as close as possible to the tie point.

The thermal mass connected to the tie point is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_L , the junction temperature may be determined by:

$$T_J = T_L + \Delta T_{JL}$$

ΔT_{JL} is the increase in junction temperature above the lead temperature and may be found from Figure 3 for a train of power pulses.

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of I_Z , limits of P_D and the extremes of $T_J(\Delta T_J)$ may be estimated. Changes in voltage, V_Z , can then be found from:

$$\Delta V = \alpha_V V_Z \Delta T_J$$

$\alpha_V V_Z$, the zener voltage temperature coefficient, is found from Figures 5 and 6.

Under high power-pulse operation, the zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Data of Figure 3 should not be used to compute surge capability. Surge limitations are given in Figure 2. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure 2 be exceeded.



2EZ6.8~2EZ51

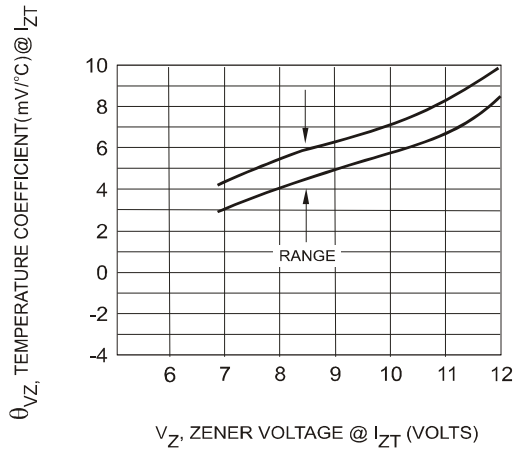


FIGURE 4. UNITS 6.8 TO 12 VOLTS

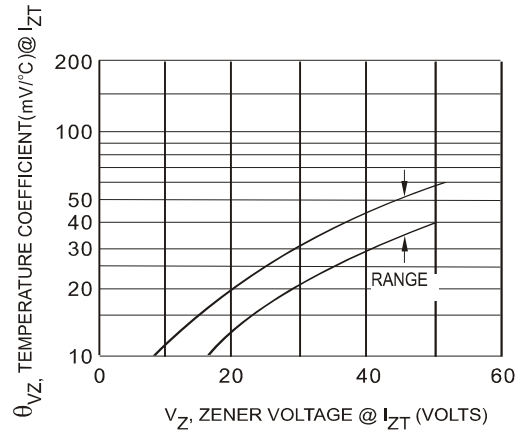


FIGURE 5. UNITS 10 TO 51 VOLTS

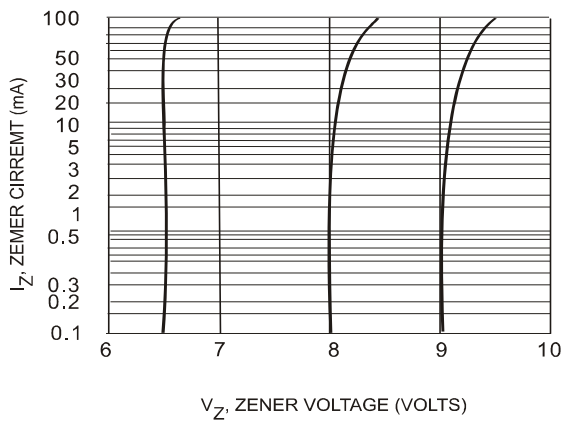


FIGURE 6. VZ=6.8 THRU 10 VOLTS

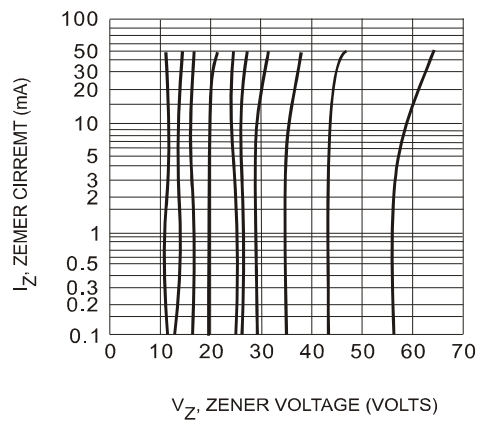


FIGURE 7. VZ=12 THRU 51 VOLTS

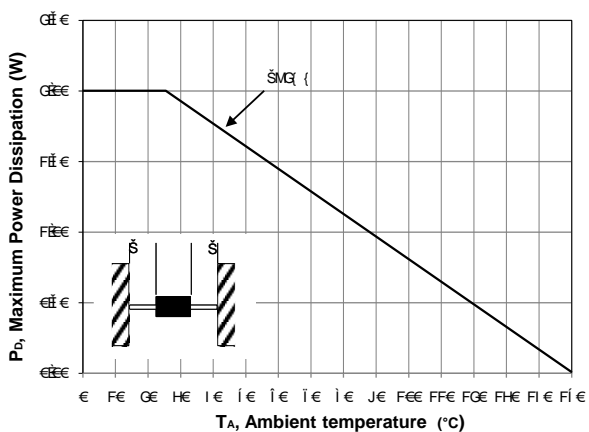


FIGURE 8. TYPICAL THERMAL RESISTANCE



2EZ6.8~2EZ51

Part No_packing code_Version

2EZ6.8_AY_00001
 2EZ6.8_AY_10001
 2EZ6.8_B0_00001
 2EZ6.8_B0_10001
 2EZ6.8_R2_00001
 2EZ6.8_R2_10001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



2EZ6.8~2EZ51

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panjit\(强茂\)](#)