



SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


VOLTAGE 40 Volt CURRENT 2 Ampere


FEATURES


- Surface mount package ideally suited for autonatic insertion
- Low power loss, high efficieucy
- Low forward voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

- Case: SOD-123FL, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0006 ounces, 0.0173 grams
- · Polarity: Color band denotes cathode end
- Marking: R4





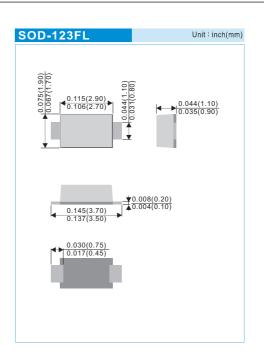

ABSOLUTE RATINGS(T_x=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNITS
Reverse Voltage	V _R	40	V
Peak Reversr Voltage	V_{RRM}	40	V
Average Rectified Current	I _{F(AV)}	2	А
Non-repetitive Peak Forward Surge Current at t=8.3ms	I _{FSM}	50	Α

ELECTRICAL AND THERMAL CHARACTERISTICS(T_x=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNITS
Minimum Reverse Breakdown Voltage at I _R =500μA	V _R	40	V
Maximum Forward Voltage at I _F =2.0A	V _F	0.45	V
Reverse Leakage Current at V _{RRM}	I _R	500	μΑ
Typical Thermal Resistance, Junction to Ambient (Note 1)	R _{eJA}	R _{eJA} 250	
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-50 to +125	°C

Note.1 Mounted on PCB with minimum pad layout.





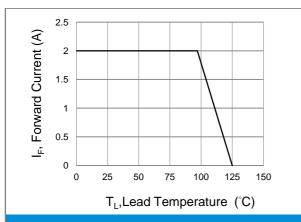


Fig.1 Forward Current Derating Curve

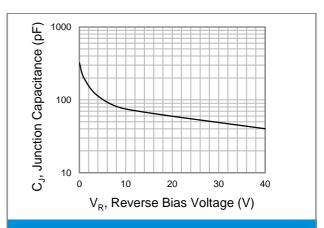


Fig.2 Typical Junction Capacitance

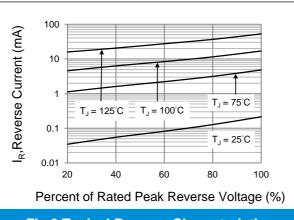
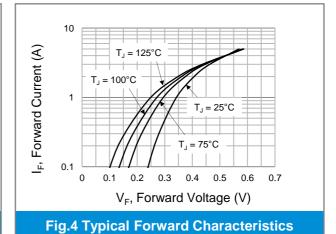


Fig.3 Typical Reverse Characteristics

50

40

30




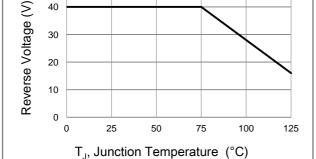


Fig.5 Operating Temperature Derating Curve





MOUNTING PAD LAYOUT

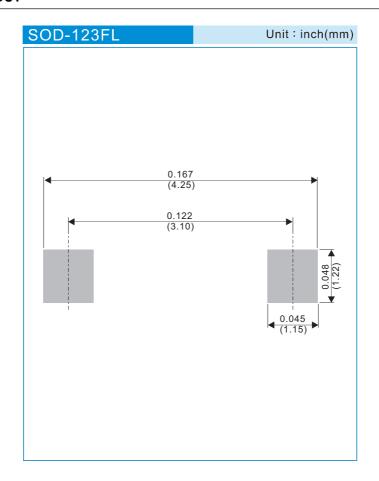

ORDER INFORMATION

· Packing information

T/R - 10K per 13" plastic Reel

T/R - 3K per 7" plastic Reel






Part No_packing code_Version

SS2040LL_R1_00001 SS2040LL_R2_00001

For example:

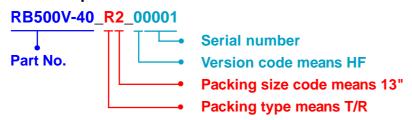

Packing Code XX			Version Code XXXXX			
Packing type	1st Code	Packing size code	2 nd Code	HF or RoHS	1st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	s	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

单击下面可查看定价,库存,交付和生命周期等信息

>>Panjit(强茂)