



PJSD03W-AU SERIES

SINGLE LINE TVS DIODE FOR ESD PROTECTION PORTABLE ELECTRONICS

VOLTAGE

3~36 Volt

POWER

350 Watt

SOD-323



Unit : inch(mm)

FEATURES

- 350 Watts peak pulses power (tp=8/20μs)
- Small package for use in portable electronics
- Suitable replacement for MLV'S in ESD protection applications
- Low clamping voltage and leakage current
- IEC 61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- Acquire quality system certificate : TS16949
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

APPLICATIONS

- Case : SOD-323 plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Polarity : Color band cathode
- Apporx. Weight : 0.0001 ounce, 0.0041 gram

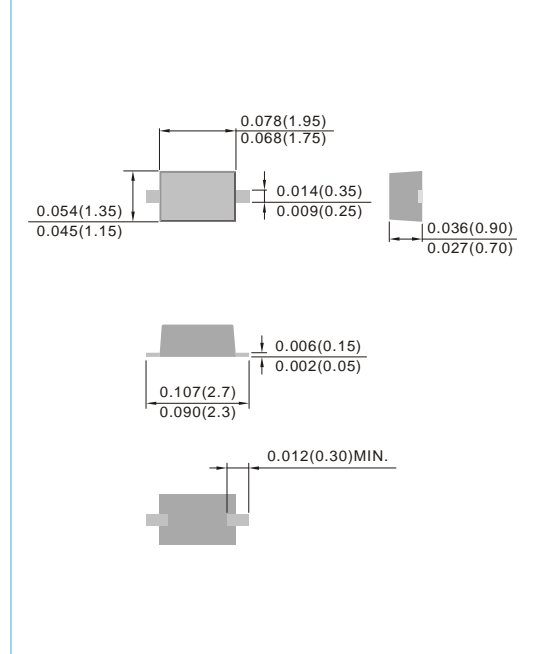

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATING

| Rating | Symbol | Value | Units |
|-------------------------------|------------------|------------|-------|
| Peak Pulse Power (tp=8/20 μs) | P _{PK} | 350 | W |
| ESD Voltage | V _{ESD} | 25 | KV |
| Operating Temperature | T _J | -50 to 150 | °C |
| Storage Temperature | T _{STG} | -50 to 150 | °C |



PJSD03W-AU SERIES

| PJSD03W-AU Marking 03W | | | | | | |
|---------------------------------|-----------|------------------|------|---------|------|---------|
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 3.0 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 4 | - | 5.0 | V |
| Reverse Leakage Current | I_R | $V_R=3.0V$ | - | - | 125 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 6.5 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 450 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 150 | - | pF |
| PJSD05W-AU Marking 05W | | | | | | |
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 5 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 6 | - | 7.2 | V |
| Reverse Leakage Current | I_R | $V_R=5V$ | - | - | 10 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 9.8 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 300 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 100 | - | pF |
| PJSD08W-AU Marking 08W | | | | | | |
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 8 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 8.5 | - | 10 | V |
| Reverse Leakage Current | I_R | $V_R=8V$ | - | - | 10 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 13.4 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 150 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 80 | - | pF |
| PJSD12W-AU Marking 12W | | | | | | |
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 12 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 13.3 | - | 15 | V |
| Reverse Leakage Current | I_R | $V_R=12V$ | - | - | 1 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 19 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 130 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 50 | - | pF |







PJSD03W-AU SERIES

| PJSD15W-AU Marking 15W | | | | | | |
|---------------------------------|-----------|------------------|------|---------|------|---------|
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 15 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 16.7 | - | 20 | V |
| Reverse Leakage Current | I_R | $V_R=15V$ | - | - | 1 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 24 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 120 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 30 | - | pF |
| PJSD24W-AU Marking 24W | | | | | | |
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 24 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 26.6 | - | 30 | V |
| Reverse Leakage Current | I_R | $V_R=24V$ | - | - | 1 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 43 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 80 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 10 | - | pF |
| PJSD36W-AU Marking 36W | | | | | | |
| Parameter | Symbol | Conditions | Min. | Typical | Max. | Units |
| Reverse Stand-Off Voltage | V_{RWM} | - | - | - | 36 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_{BR}=1mA$ | 39.9 | - | 45 | V |
| Reverse Leakage Current | I_R | $V_R=36V$ | - | - | 1 | μA |
| Clamping Voltage(8/20 μs) | V_C | $I_{PP}=1A$ | - | - | 60 | V |
| Off State Junction Capacitance | C_J | 0Vdc Bias=f=1MHz | - | 30 | - | pF |
| Off State Junction Capacitance | C_J | 5Vdc Bias=f=1MHz | - | 1 | - | pF |



PJSD03W-AU SERIES

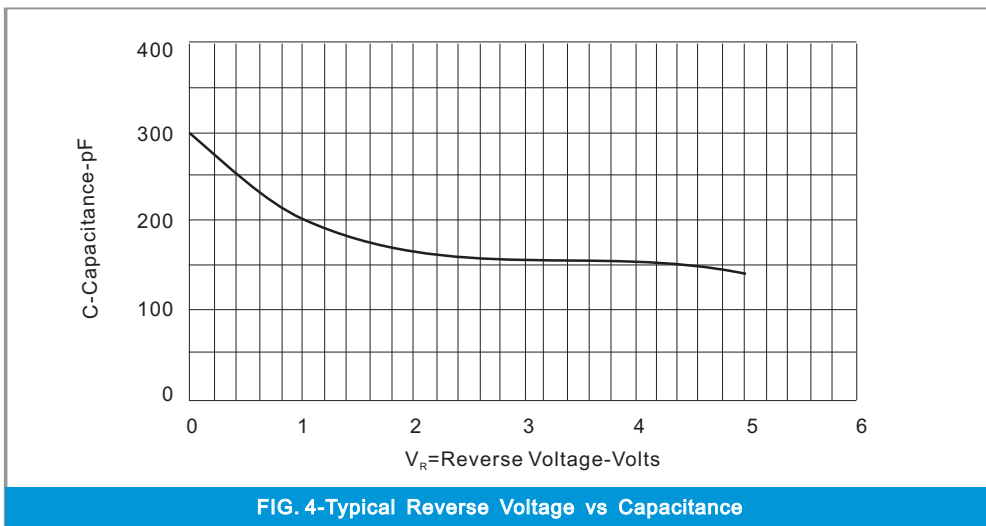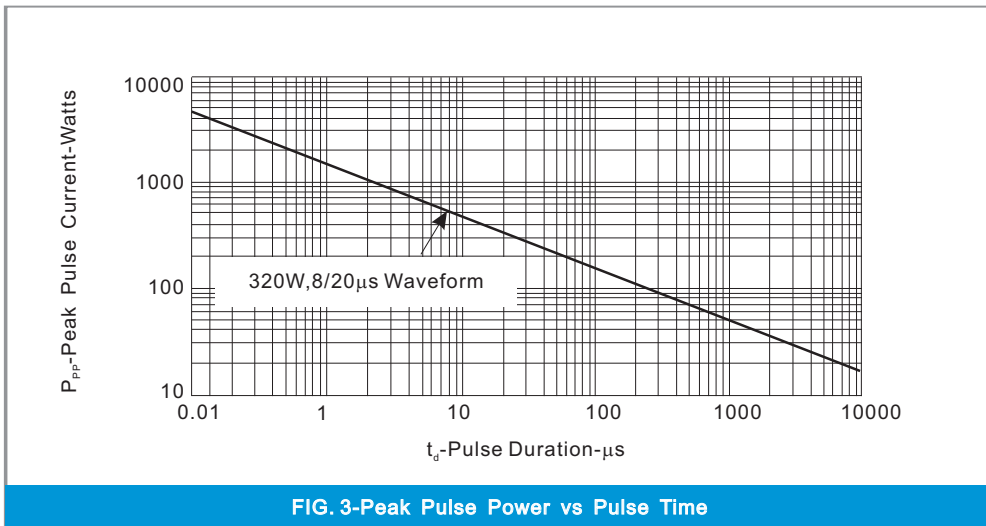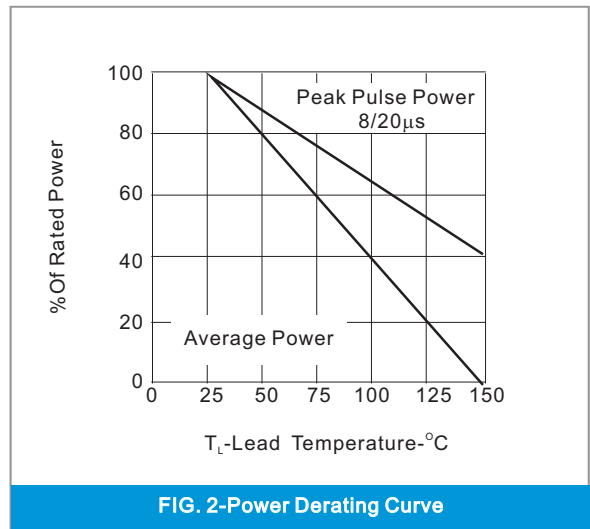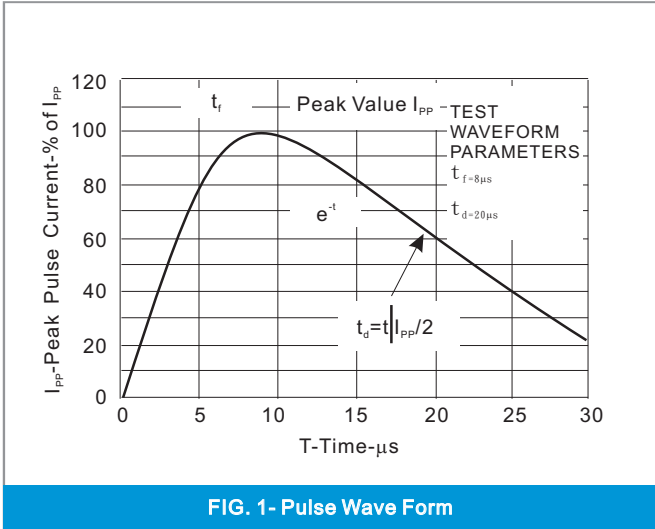




PJSD03W-AU SERIES

MOUNTING PAD LAYOUT

SOD-323

Unit : inch(mm)

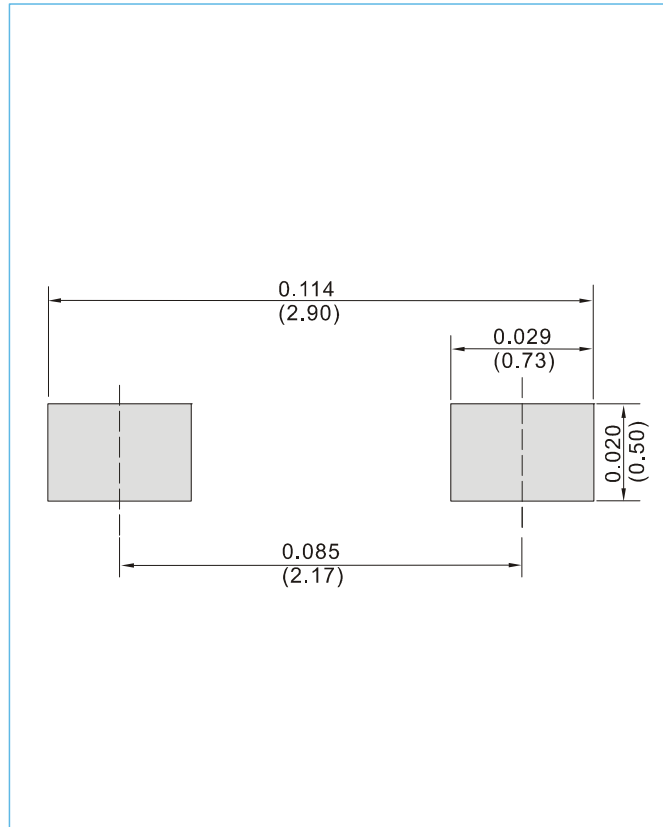

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel



PJSD03W-AU SERIES


Part No_packing code_Version

PJSD03W-AU_R1_000A1

PJSD03W-AU_R2_000A1

For example :

RB500V-40_R2_00001

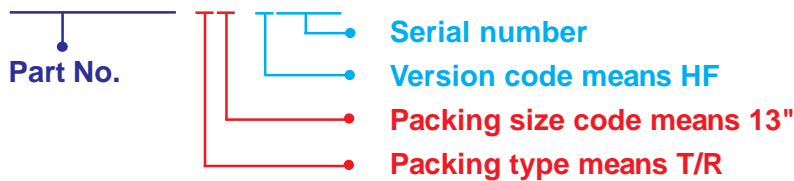

| Packing Code XX | | | | Version Code XXXXX | | |
|--------------------------------------|----------------------|----------------------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| Tape and Ammunition Box (T/B) | A | N/A | 0 | HF | 0 | serial number |
| Tape and Reel (T/R) | R | 7" | 1 | RoHS | 1 | serial number |
| Bulk Packing (B/P) | B | 13" | 2 | | | |
| Tube Packing (T/P) | T | 26mm | X | | | |
| Tape and Reel (Right Oriented) (TRR) | S | 52mm | Y | | | |
| Tape and Reel (Left Oriented) (TRL) | L | PANASERT T/B CATHODE UP (PBCU) | U | | | |
| FORMING | F | PANASERT T/B CATHODE DOWN (PBCD) | D | | | |



PJSD03W-AU SERIES

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panjit\(强茂\)](#)