



DATA SHEET

GBU8A thru GBU8K

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

VOLTAGE 50 to 800 Volts **POWER** 8.0 Amperes

GBU Unit:(mm)


Recongized File #E228882

FEATURES

- Plastic material has Underwriters Laboratory Flammability Classification 94V-O
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

MECHANICAL DATA

Case: Reliable low cost construction utilizing molded plastic technique
 Terminals: Leads solderable per MIL-STD-202G,
 Method 208
 Mounting position: Any
 Mounting torque: 5 in. lb. Max.
 Weight: 0.15 ounce, 4.0 grams

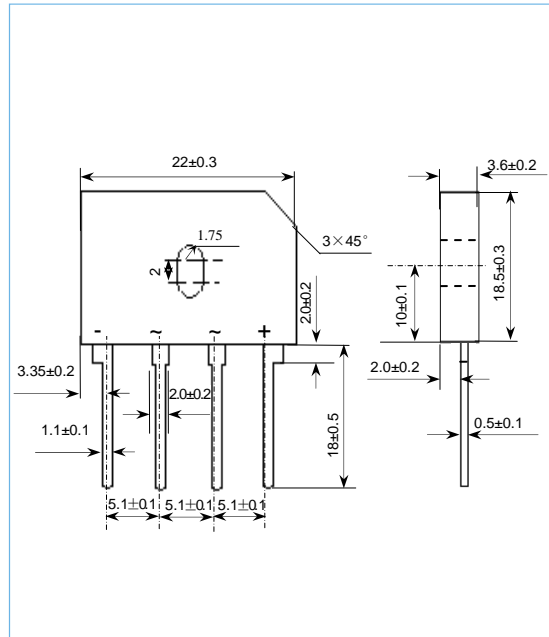

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.
 For Capacitive load derate current by 20%.

PARAMETER	SYMBOL	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current at $T_C=100^\circ C$ at $T_A=45^\circ C$	$I_{F(AV)}$	8.0 6.0							A
I ² t Rating for fusing (t<8.3ms)	I ² t	166							A ² sec
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200							Apk
Maximum Instantaneous Forward Voltage Drop per element at 4.0A	V_F	1.0							Vpk
Maximum Reverse Leakage Current at Rated @ $T_A=25^\circ C$ Dc Blocking Voltage @ $T_A=100^\circ C$	I_R	5.0 500							uA
Typical Thermal Resistance per leg (Note 2) (Note 3)	$R_{\theta_{JA}}$ $R_{\theta_{JC}}$	23 5							°C/W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150							°C

NOTES:

1. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.
2. Units Mounted in free air, no heatsink, P.C.B at 0.375"(9.5mm) lead length with 0.5 x 0.5"(12 x 12mm)copper pads.
3. Units Mounted on a 2.6 x 1.4" x 0.06" thick (6.5 x 3.5 x 0.15cm) AL plate.



RATING AND CHARACTERISTIC CURVES

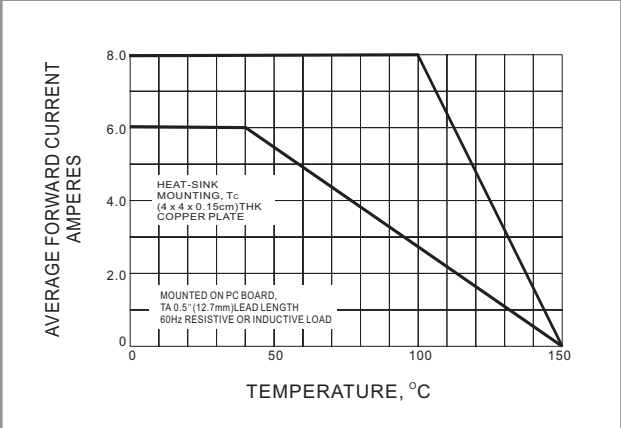


Fig.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

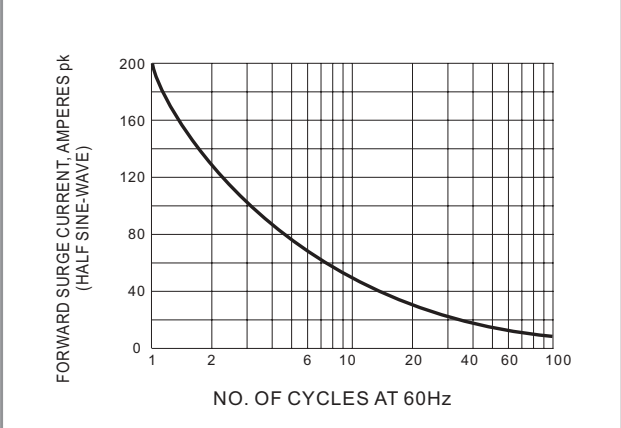


Fig.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

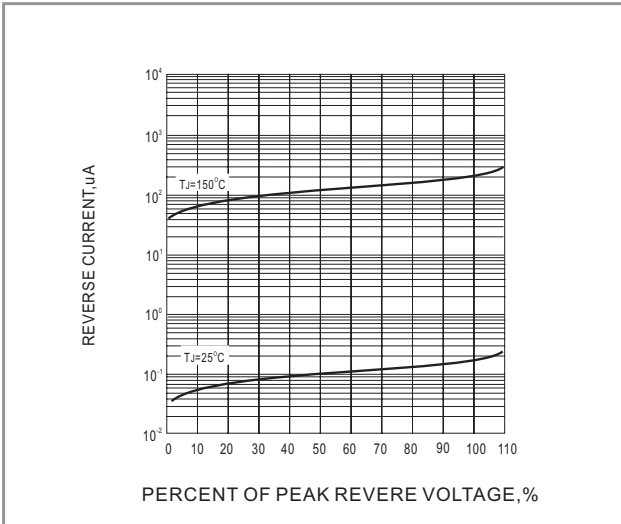


Fig.3 - TYPICAL REVERSE CHARACTERISTICS

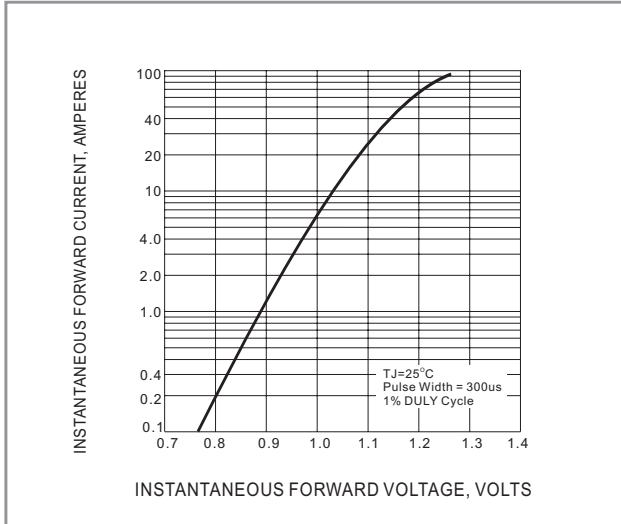


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER ELEMENT

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panjit\(强茂\)](#)