



SWITCHING DIODES

VOLTAGE 120~250 Volt POWER 500 mWatt

FEATURES

- · Fast switching Speed
- · Electrically Identical to Standerd JEDEC
- · High Conductance
- Axial lead Package Ideally Suited for Automatic Insertion
- · Lead free in compliance with EU RoHS 2.0


MECHANICAL DATA

- Case: Molded Glass DO-35
- Terminals: Solderable per MIL-STD-750, Method 2026
- · Approx. Weight: 0.0047 ounces, 0.132 grams
- Ordering information : Suffix : " -35 " to order DO-35 Package
- Packing information

B - 2K per Bulk box

T/R - 10K per 15" plastic Reel

T/B - 5K per horiz. tape & Ammo box

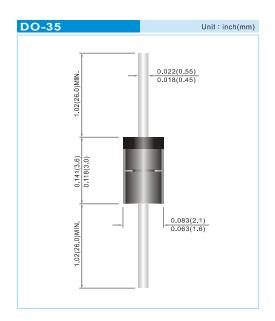

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TJ = 25°C unless otherwise noted)

PARAMETER	SYMBOL	BAV19	BAV20	BAV21	UNITS
Reverse Voltage	V _R	100	150	200	V
Peak Reverse Voltage	V _{RM}	120	200	250	V
Rectified Current (Average), Half Wave Rectification with Resistive Load andf <u>></u> =50Hz	I _{F(AV)}		mA		
Peak Forward Surge Current,1s	I _{FSM}		А		
Power Dissipation Derate Above 25°C	P _{tot}		mW		
Maximum Forward Voltage at 0.1A	V _F		V		
Maximum DC Reverse Current at Rated DC Blocking Voltage T _J =25°C	I _R	0.1			μА
Typical Junction Capacitance (Notes1)	C	3			pF
Maximum Reverse Recovery (Notes2)	t _{rr}	50			ns
Typical Thermal Resistance	$R_{_{\theta JA}}$	350			°C / W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150			°C

NOTE:

- 1. CJ at VR=0, f=1MHZ
- 2. From IF=30mA to IR=-3mA, VR=6Volts, RL=100 Ω

October 13,2017-REV.04 PAGE . 1





RATING AND CHARACTERISTIC CURVES

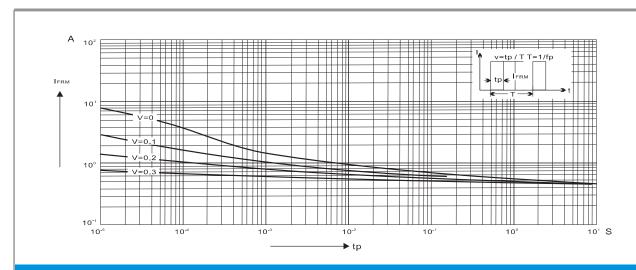


Fig.1 ADMISSIBLE REPETITIVE PEAK FORWARD CURRENT VERSUS PULSE DURATION

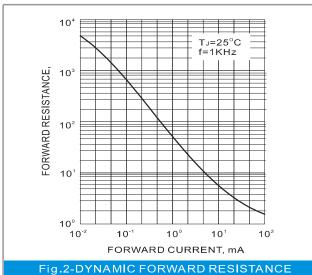


Fig.2-DYNAMIC FORWARD RESISTANCE VERSUS FORWARD CURRENT

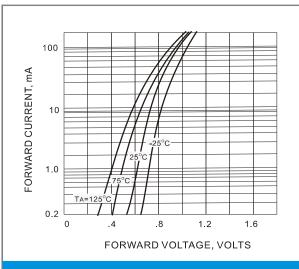


Fig.2 FORWARD CHARACTERISTICS


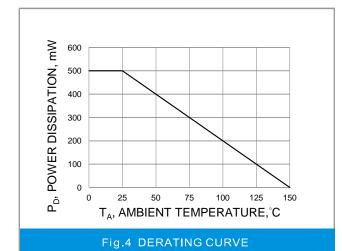


Fig.5 TYPICAL JUNCTION CAPACITANCE





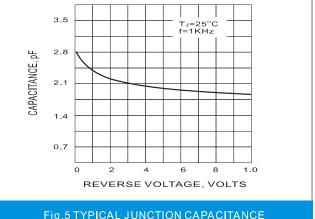

Part No_packing code_Version

BAV19_AX_10001 BAV19_AY_10001 BAV19_R2_10001 BAV19_B0_10001

For example:



Packing Code XX				Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code	
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number	
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number	
Bulk Packing (B/P)	В	13"	2				
Tube Packing (T/P)	Т	26mm	X				
Tape and Reel (Right Oriented) (TRR)	8	52mm	Y				
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U				
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D				





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

单击下面可查看定价,库存,交付和生命周期等信息

>>Panjit(强茂)