



BC846AW-AU ~ BC850CW-AU

NPN GENERAL PURPOSE TRANSISTORS

VOLTAGE 30/45/65 Volt **POWER** 250 mWatt


SOT-323 Unit : inch(mm)

FEATURES

- General purpose amplifier applications
- NPN epitaxial silicon, planar design
- Collector current IC = 100mA
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

- Case: SOT-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0001 ounce, 0.005 gram

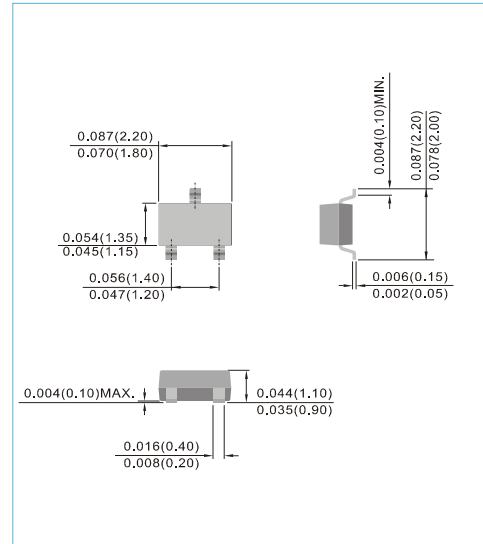

| Device Marking: | | | | |
|-----------------|----------------|----------------|----------------|----------------|
| BC846AW-AU=46A | BC847AW-AU=47A | BC848AW-AU=48A | | |
| BC846BW-AU=46B | BC847BW-AU=47B | BC848BW-AU=48B | BC849BW-AU=49B | BC850BW-AU=50B |
| | BC847CW-AU=47C | BC848CW-AU=48C | BC849CW-AU=49C | BC850CW-AU=50C |

ABSOLUTE RATINGS

| Parameter | Symbol | Value | Units |
|--------------------------------|------------------|----------------------|-------|
| Collector - Emitter Voltage | V _{CEO} | BC846W-AU | 65 |
| | | BC847W-AU, BC850W-AU | 45 |
| | | BC848W-AU, BC849W-AU | 30 |
| Collector - Base Voltage | V _{CBO} | BC846W-AU | 80 |
| | | BC847W-AU, BC850W-AU | 50 |
| | | BC848W-AU, BC849W-AU | 30 |
| Emitter - Base Voltage | V _{EBO} | BC846W-AU | 6 |
| | | BC847W-AU, BC850W-AU | 6 |
| | | BC848W-AU, BC849W-AU | 5 |
| Collector Current - Continuous | I _C | 100 | mA |

THERMAL CHARACTERISTICS

| Parameter | Symbol | Value | Units |
|--------------------------------|------------------|------------|-------|
| Max Power Dissipation (Note 1) | P _{TOT} | 250 | mW |
| Typical thermal Resistance | R _{θJA} | 500 | °C/W |
| | R _{θJC} | 100 | |
| Junction Temperature | T _J | -55 to 150 | °C |
| Storage Temperature | T _{STG} | -55 to 150 | °C |

Note 1: Transistor mounted on FR-5 board 1.0 x 0.75 x 0.062 in.



BC846AW-AU ~ BC850CW-AU

ELECTRICAL CHARACTERISTICS

| Parameter | Symbol | Test Condition | MIN. | TYP. | MAX. | Units |
|---|---------------|--|-------------------|-------------------|-------------------|---------------|
| Collector - Emitter Breakdown Voltage BC846AW-AU,BW-AU BC847AW-AU/BW-AU/CW-AU,BC850BW-AU/CW-AU BC848AW-AU/BW-AU/CW-AU,BC849BW-AU/CW-AU | $V_{(BR)CEO}$ | $I_C=10mA, I_B=0$ | 65 45 30 | - | - | V |
| Collector - Base Breakdown Voltage BC846AW-AU,BW-AU BC847AW-AU/BW-AU/CW-AU,BC850BW-AU/CW-AU BC848AW-AU/BW-AU/CW-AU,BC849BW-AU/CW-AU | $V_{(BR)CBO}$ | $I_C=10\mu A, I_E=0$ | 80 50 30 | - | - | V |
| Emitter - Base Breakdown Voltage BC846AW-AU,BW-AU BC847AW-AU/BW-AU/CW-AU,BC850BW-AU/CW-AU BC848AW-AU/BW-AU/CW-AU,BC849BW-AU/CW-AU | $V_{(BR)EBO}$ | $I_E=1\mu A, I_C=0$ | 6 6 5 | - | - | V |
| Emitter-Base Cutoff Current | I_{EBO} | $V_{EB}=5$ | - | - | 100 | nA |
| Collector-Base Cutoff Current | I_{CBO} | $V_{CB}=30V, I_E=0$ $V_{CB}=30V, I_E=0, T_J=150^{\circ}C$ | - | - | 15 5 | nA μA |
| DC Current Gain BC846~BC848 Suffix "AW-AU" BC846~BC850 Suffix "BW-AU" BC847~BC850 Suffix "CW-AU" | h_{FE} | $I_C=10\mu A, V_{CE}=5V$ | - | 90 150 270 | - | - |
| DC Current Gain BC846~BC848 Suffix "AW-AU" BC846~BC850 Suffix "BW-AU" BC847~BC850 Suffix "CW-AU" | h_{FE} | $I_C=2mA, V_{CE}=5V$ | 110 200 420 | 180 290 520 | 220 450 800 | - |
| Collector - Emitter Saturation Voltage | $V_{CE(SAT)}$ | $I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5.0mA$ | - | - | 0.25 0.6 | V |
| Base - Emitter Saturation Voltage | $V_{BE(SAT)}$ | $I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5mA$ | - | 0.7 0.9 | - | V |
| Base - Emitter Voltage | $V_{BE(ON)}$ | $I_C=2mA, V_{CE}=5V$ $I_C=10mA, V_{CE}=5V$ | 0.58 - | 0.66 - | 0.7 0.77 | V |
| Collector - Base Capacitance | C_{CBO} | $V_{CB}=10V, I_E=0, f=1MHz$ | - | - | 4.5 | pF |




Fig.34



BC846AW-AU ~ BC850CW-AU

ELECTRICAL CHARACTERISTICS CURVE (BC846AW-AU, BAC847AW-AU, BC848AW-AU)

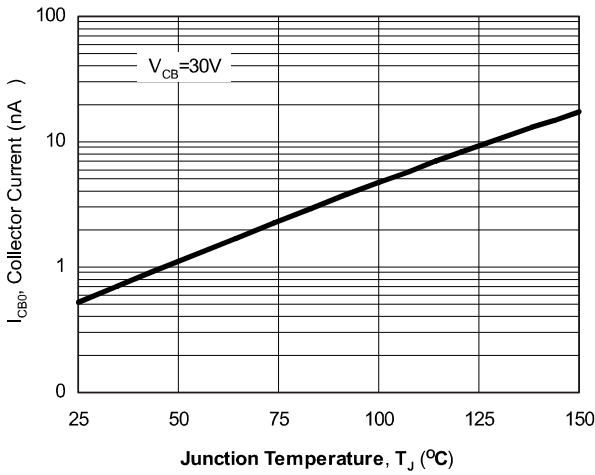


Fig.1 Typical I_{CBO} vs. Junction Temperature

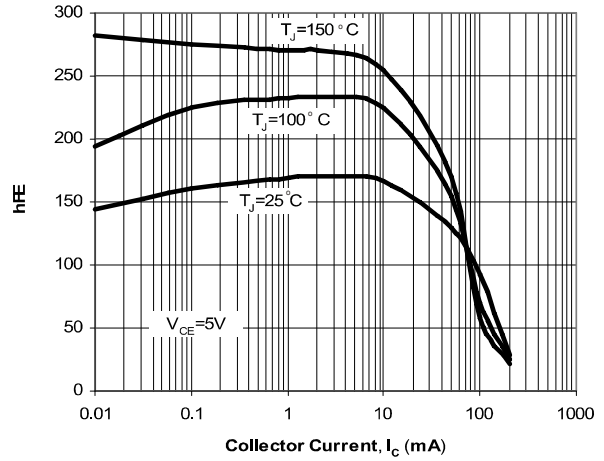


Fig.2 Typical h_{FE} vs. Collector Current

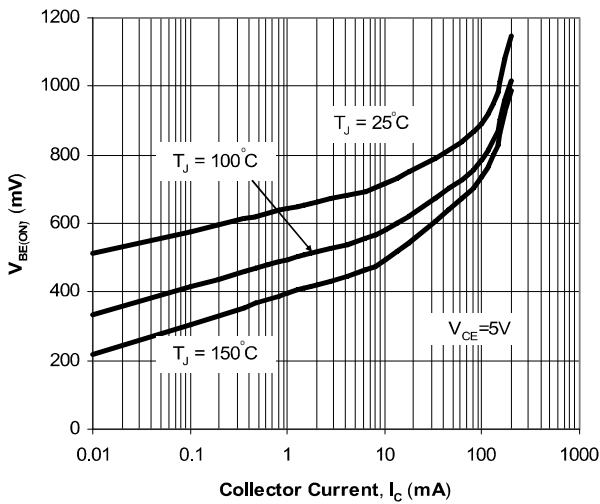


Fig.3 Typical $V_{BE(ON)}$ vs. Collector Current

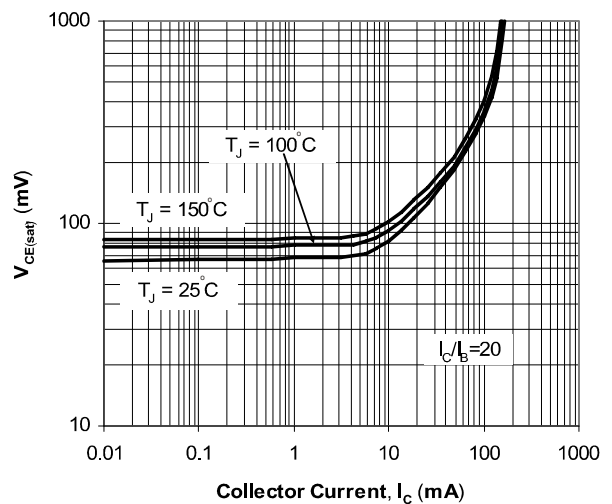


Fig.4 Typical $V_{CE(SAT)}$ vs. Collector Current

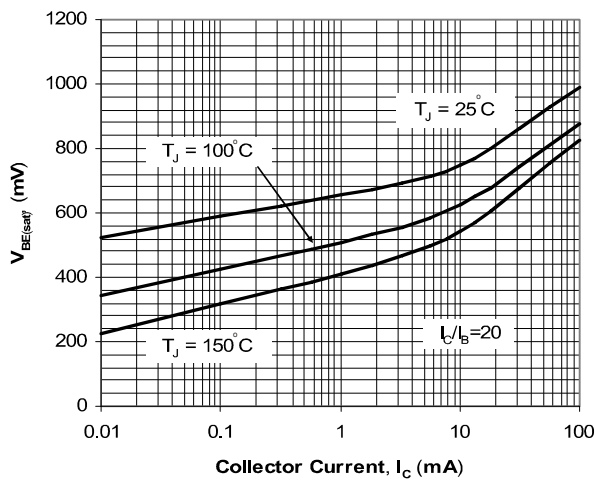


Fig.5 Typical $V_{BE(SAT)}$ vs. Collector Current

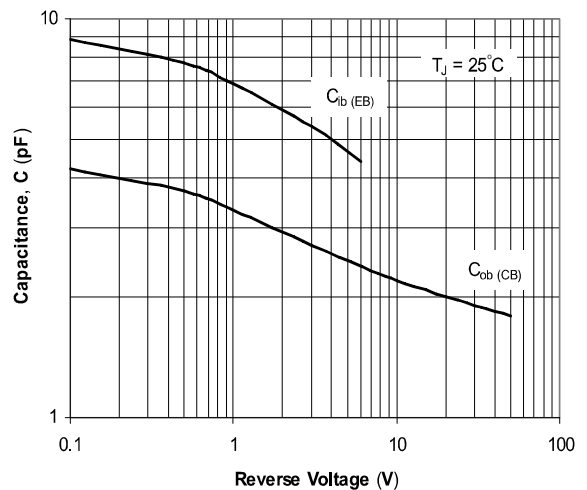


Fig.6 Typical Capacitances vs. Reverse Voltage



BC846AW-AU ~ BC850CW-AU

ELECTRICAL CHARACTERISTICS CURVE (BC846BW-AU, BAC847BW-AU, BC848BW-AU, BC849BW-AU) (BC850BW-AU)

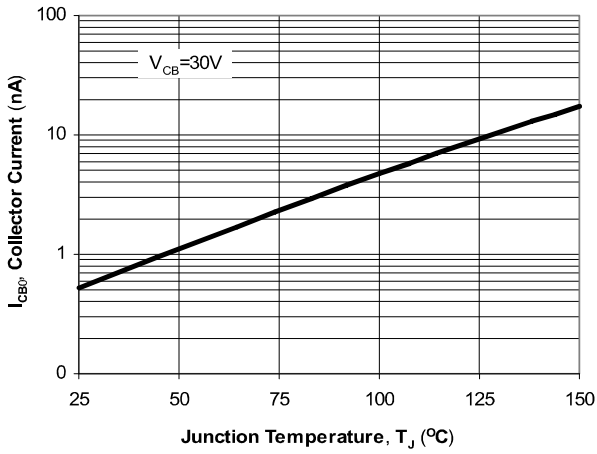


Fig.1 Typical I_{CBO} vs. Junction Temperature

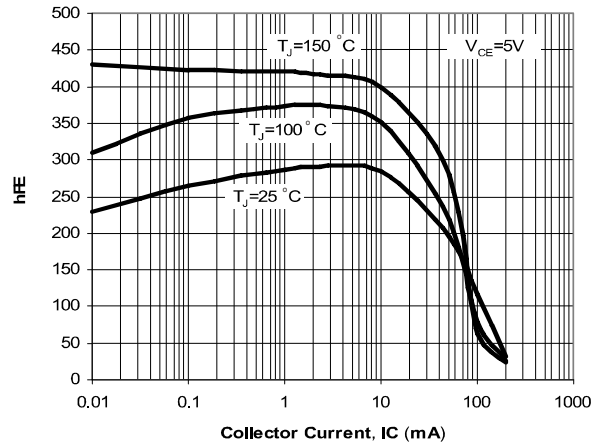


Fig.2 Typical h_{FE} vs. Collector Current

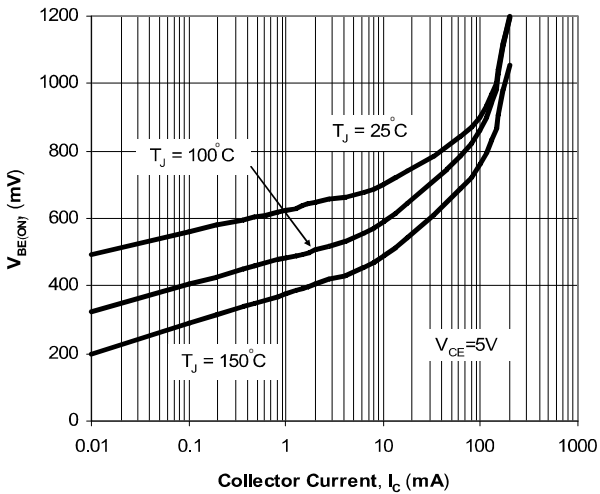


Fig.3 Typical $V_{BE(ON)}$ vs. Collector Current

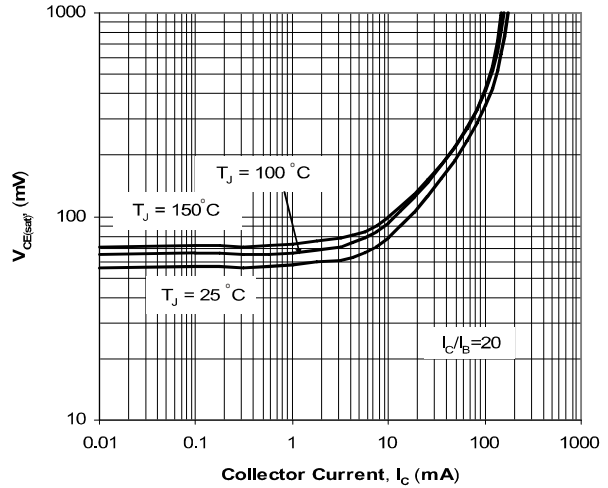


Fig.4 Typical $V_{CE(SAT)}$ vs. Collector Current

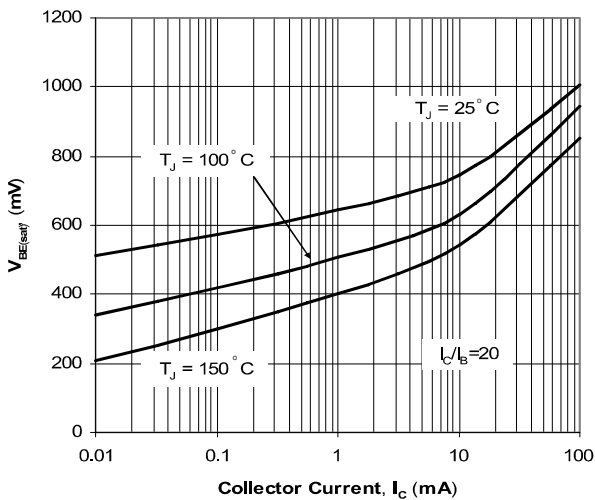


Fig.5 Typical $V_{BE(SAT)}$ vs. Collector Current

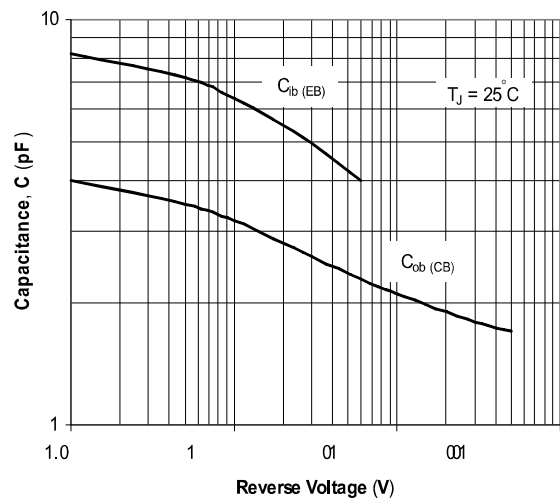


Fig.6 Typical Capacitances vs. Reverse Voltage



BC846AW-AU ~ BC850CW-AU

ELECTRICAL CHARACTERISTICS CURVE (BAC847CW-AU,BC848CW-AU,BC849CW-AU,BC850CW-AU)

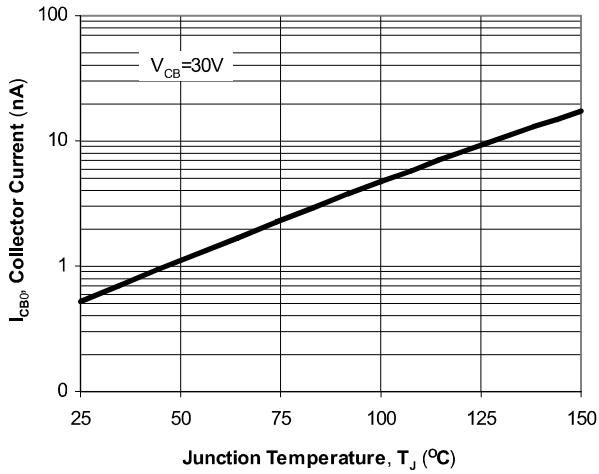


Fig. 1 Typical I_{CBO} vs. Junction Temperature

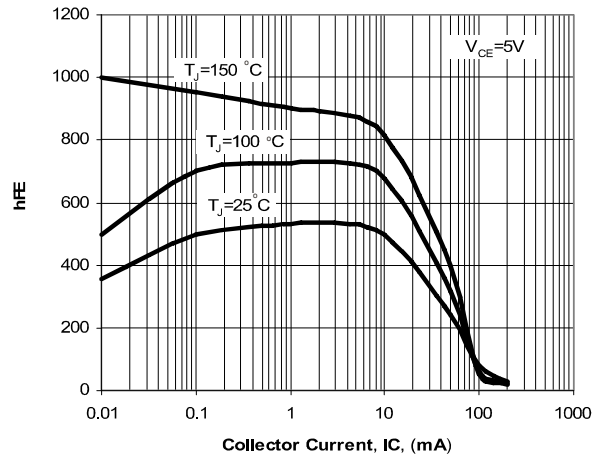


Fig. 2 Typical h_{FE} vs. Collector Current

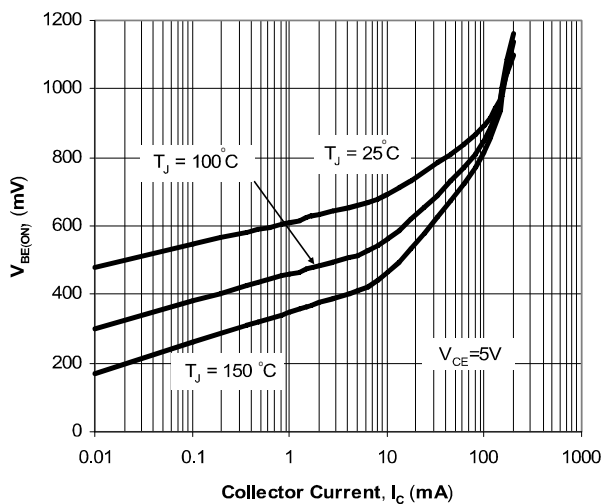


Fig. 3 Typical $V_{BE(ON)}$ vs. Collector Current

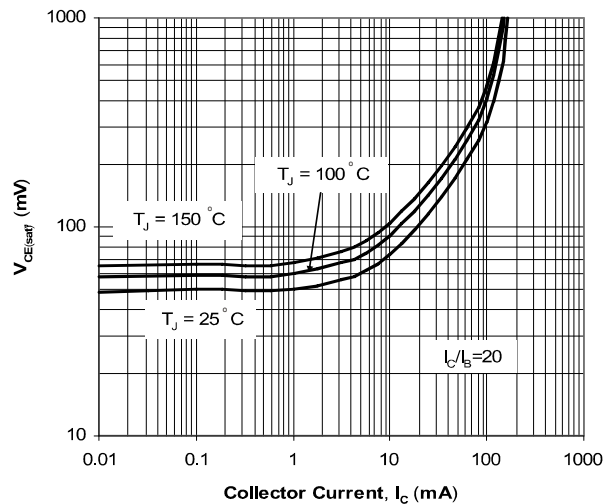


Fig. 4 Typical $V_{CE(SAT)}$ vs. Collector Current

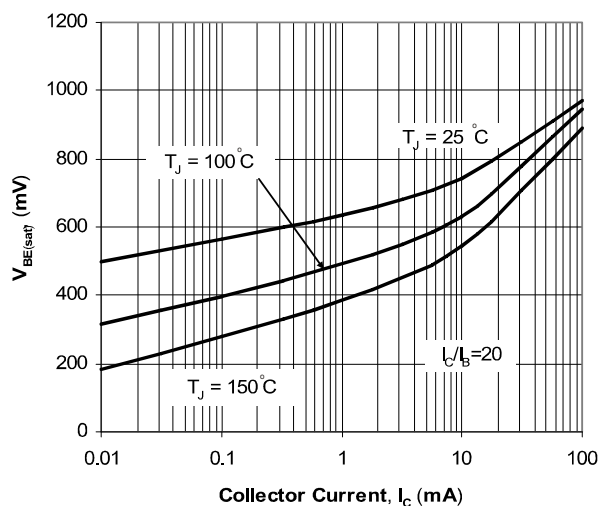


Fig. 5 Typical $V_{BE(SAT)}$ vs. Collector Current

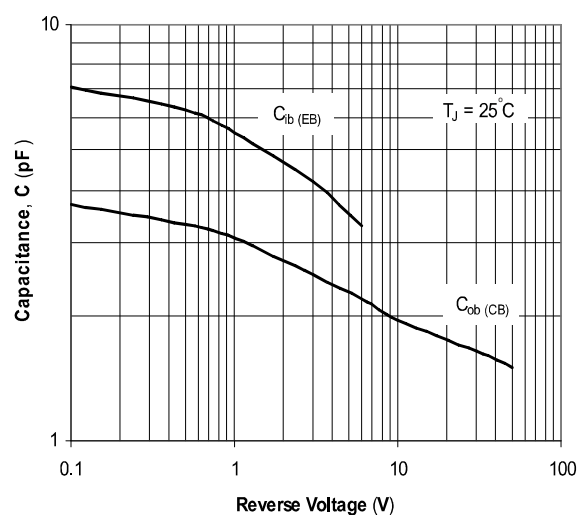


Fig. 6 Typical Capacitances vs. Reverse Voltage




BC846AW-AU ~ BC850CW-AU

MOUNTING PAD LAYOUT

SOT-323

Unit : inch(mm)

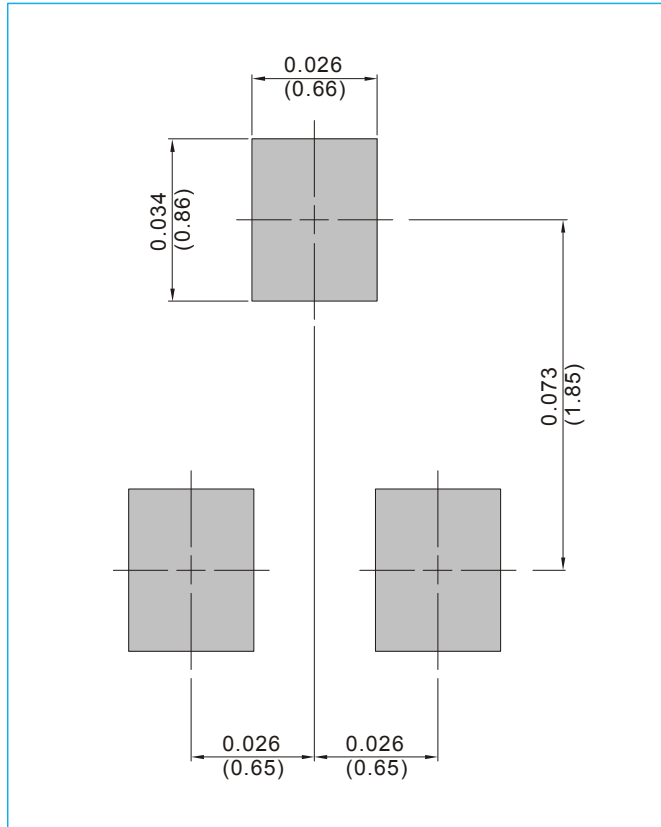

ORDER INFORMATION

- Packing information
T/R - 12K per 13" plastic Reel
T/R - 3K per 7" plastic Reel



BC846AW-AU ~ BC850CW-AU


Part No_packing code_Version

BC846AW-AU_R1_000A1

BC846AW-AU_R2_000A1

For example :

RB500V-40_R2_00001

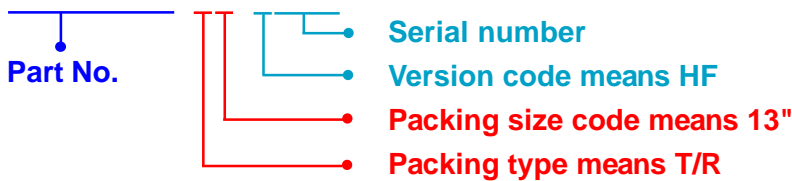

| Packing Code XX | | | | Version Code XXXXX | | |
|--------------------------------------|----------------------|----------------------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| Tape and Ammunition Box (T/B) | A | N/A | 0 | HF | 0 | serial number |
| Tape and Reel (T/R) | R | 7" | 1 | RoHS | 1 | serial number |
| Bulk Packing (B/P) | B | 13" | 2 | | | |
| Tube Packing (T/P) | T | 26mm | X | | | |
| Tape and Reel (Right Oriented) (TRR) | S | 52mm | Y | | | |
| Tape and Reel (Left Oriented) (TRL) | L | PANASERT T/B CATHODE UP (PBCU) | U | | | |
| FORMING | F | PANASERT T/B CATHODE DOWN (PBCD) | D | | | |



BC846AW-AU ~ BC850CW-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panjit\(强茂\)](#)