



#### **SURFACE MOUNT SWITCHING DIODES**

VOLTAGE 100 Volt POWER 250mWatt

#### **FEATURES**

- Fast switching Speed.
- Electrically Identical to Standard JEDEC
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion
- Acquire quality system certificate: TS16949
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)


#### **MECHANICAL DATA**

Case: SOT-23 plastic case.

Terminals: Solderable per MIL-STD-750, Method 2026

Standard packaging: 8mm tape

Approx weight: 0.0003 ounces, 0.0084 grams




#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TJ = 25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNITS
Marking Code		A2	
Reverse Voltage	VR	75	V
Peak Reverse Voltage	VRM	100	V
RMS Voltage	Vrms	50	V
Maximum DC Blocking Voltage	Vdc	75	V
Maximum Average Forward Current at TA=25°C	lav	150	mA
Peak Forward Surge Current, 1μs	IFSM	4	А
Power Dissipation Derate Above 25°C	Ртот	250	mW
Maximum Forward Voltage	VF	0.715@0.001A 0.855@0.01A 1.0@ 0.05A 1.25@0.15A	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T <sub>J</sub> =25°C	IR	0.025@20V 2.5@75V	μА
Junction Capacitance (Notes1)	СJ	1.5	pF
Maximum Reverse Recovery Time (Notes2)	Trr	4.0	ns
Typical Thermal Resistance	RөJA	357	°C / W
Storage Temperature Range	TJ	-55 to +150	°C

#### NOTE:

1. CJ at VR=0, f=1MHZ


2.From IF=10mA to IR=1mA, VR=6Volts, RL=100 $\Omega$ 



June 27,2014-REV.03 PAGE . 1










FIG. 1-TYPICAL FORWARD CHARACTERISTIC





FIG. 3 POWER DERATING CURVE





#### **MOUNTING PAD LAYOUT**

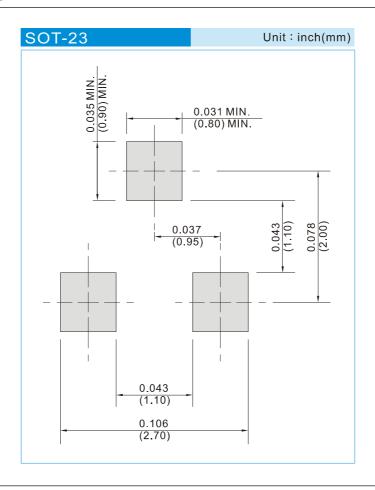

#### **ORDER INFORMATION**

• Packing information

T/R - 12K per 13" plastic Reel

T/R - 3K per 7" plastic Reel





## Part No\_packing code\_Version

MMBD4148-AU\_R1\_000A1 MMBD4148-AU\_R2\_000A1

# For example :



Packing Code XX			Version Code XXXXX			
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			





### **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
  of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
   Customers are responsible in comprehending the suitable use in particular applications.
   Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

单击下面可查看定价,库存,交付和生命周期等信息

>>Panjit(强茂)