

Panel feed-through terminal block - HDFKV 50-VP/Z - 0717212

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel feed-through terminal block, Connection method: Screw connection, Bolt connection, Load current : 150 A, Cross section: 16 mm² - 50 mm², AWG 6 - 1/0, Connection direction of the conductor to plug-in direction: 90 °, Width: 18.8 mm, Color: gray

Product Features

- Easy grouping with engagement pin versions
- Both terminal halves can be easily assembled by simply snapping them together
- Molded versions ensure maximum tightness of seal
- Touch-proof insulating housing in a new design
- Universal screw connection with screw locking
- Automatic compensation of the panel thickness via the snap principle integrated in the insulation housing
-



Key commercial data

| | |
|------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 10 pc |
| Custom tariff number | 85369010 |
| Country of origin | Greece |

Technical data

General

| | |
|-----------------------------------------|-------|
| Number of levels | 1 |
| Number of connections | 2 |
| Color | gray |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |
| Maximum load current | 150 A |
| Rated surge voltage | 8 kV |
| Pollution degree | 3 |

Panel feed-through terminal block - HDFKV 50-VP/Z - 0717212

Technical data

General

| | |
|----------------------------------|---------------|
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I_N | 150 A |
| Nominal voltage U_N | 690 V |
| Open side panel | nein |
| Number of positions | 1 |

Dimensions

| | |
|-----------------|---------------|
| Width | 18.8 mm |
| Length | 90 mm |
| Plate thickness | 1 mm ... 6 mm |

Connection data

| | |
|-----------------------------------------------------------------------------------------|--------------------|
| Note | Terminal sleeve |
| Connection side | Level 1 ext. 1 |
| Connection method | Screw connection |
| Conductor cross section solid min. | 16 mm ² |
| Conductor cross section solid max. | 50 mm ² |
| Conductor cross section flexible min. | 16 mm ² |
| Conductor cross section flexible max. | 50 mm ² |
| Conductor cross section AWG/kcmil min. | 6 |
| Conductor cross section AWG/kcmil max | 1/0 |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 10 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 50 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve min. | 10 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve max. | 50 mm ² |
| 2 conductors with same cross section, solid min. | 6 mm ² |
| 2 conductors with same cross section, solid max. | 16 mm ² |
| 2 conductors with same cross section, stranded min. | 10 mm ² |
| 2 conductors with same cross section, stranded max. | 16 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 6 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 16 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 6 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 10 mm ² |
| Stripping length | 24 mm |

Panel feed-through terminal block - HDFKV 50-VP/Z - 0717212

Technical data

Connection data

| | |
|---------------------------|-----------------|
| Internal cylindrical gage | B10 |
| Screw thread | M6 |
| Tightening torque, min | 6 Nm |
| Tightening torque max | 8 Nm |
| Connection side | Level 1 int. 1 |
| Connection method | Bolt connection |
| Screw thread | M8 |
| Tightening torque, min | 12 Nm |
| Tightening torque max | 15 Nm |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141131 |
| eCl@ss 4.1 | 27141131 |
| eCl@ss 5.0 | 27141134 |
| eCl@ss 5.1 | 27141134 |
| eCl@ss 6.0 | 27141134 |
| eCl@ss 7.0 | 27141134 |
| eCl@ss 8.0 | 27141134 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001283 |
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |
| ETIM 5.0 | EC001283 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Approvals

Panel feed-through terminal block - HDFKV 50-VP/Z - 0717212

Approvals

Approvals

CSA / UL Recognized / PRS / EAC

Ex Approvals

Approvals submitted

Approval details

| | | | |
|--------------------------------|-------|-------|-------|
| CSA | | | |
| | | B | C |
| mm ² /AWG/kcmil | 6 | 6-1/0 | 6-1/0 |
| Nominal current I _N | 125 A | 125 A | 125 A |
| Nominal voltage U _N | 600 V | 600 V | 600 V |

| | | |
|--------------------------------|-------|-------|
| UL Recognized | | |
| | B | C |
| mm ² /AWG/kcmil | 6-2/0 | 6-2/0 |
| Nominal current I _N | 170 A | 170 A |
| Nominal voltage U _N | 600 V | 600 V |


PRS

EAC


Drawings

Panel feed-through terminal block - HDFKV 50-VP/Z - 0717212

Dimensional drawing

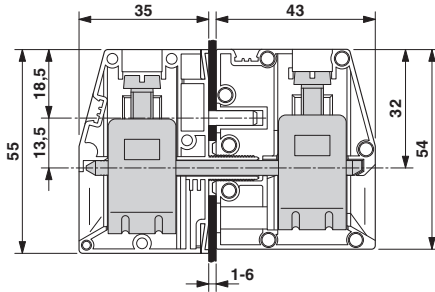

Dimensional drawing

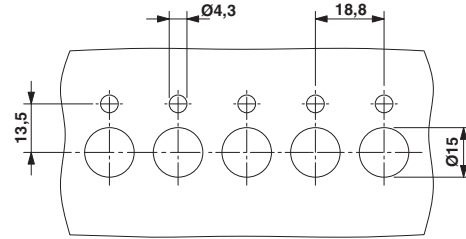

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)