


## SFL (2,8-0,8)F48

Order No.: 2285315

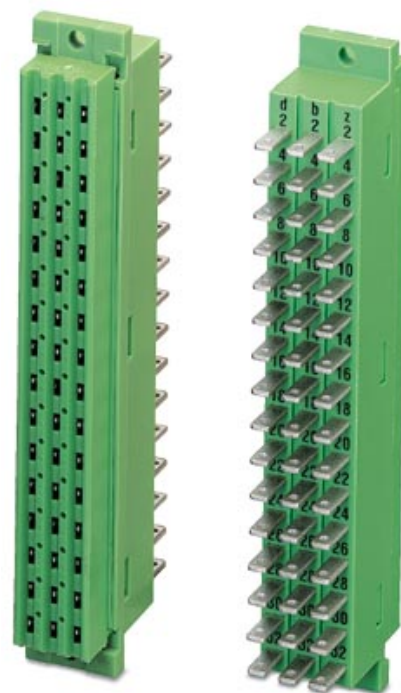

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285315>

Flat connector socket, Number of positions: 48, Pitch: 0 mm, Color:  
green

### Commercial data

|                          |                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------|
| GTIN (EAN)               | 4 017918 055912  |
| sales group              | E310                                                                                                |
| Pack                     | 10 pcs.                                                                                             |
| Customs tariff           | 85369010                                                                                            |
| Catalog page information | Page 279 (CC-2002)                                                                                  |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

#### Technical data

##### Dimensions / positions

|                     |         |
|---------------------|---------|
| Length              | 14.8 mm |
| Height              | 28.6 mm |
| Width               | 95 mm   |
| Pitch               | 0 mm    |
| Number of positions | 48      |
| Hole diameter       | 2.8 mm  |

##### Technical data

|                                    |               |
|------------------------------------|---------------|
| Range of articles                  | SFL (2,8-0,8) |
| Insulating material group          | II            |
| Rated surge voltage (III/3)        | 2.5 kV        |
| Insulating material                | PA-F          |
| Inflammability class acc. to UL 94 | HB            |

#### Certificates / Approvals



Certification


GOST

#### Accessories

| Item                   | Designation | Description                                                                                  |
|------------------------|-------------|----------------------------------------------------------------------------------------------|
| <b>Cable/conductor</b> |             |                                                                                              |
| 1406700                | PT/FS 2,8   | Plastic sheath, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves |

## Diagrams/Drawings

### Dimensioned drawing

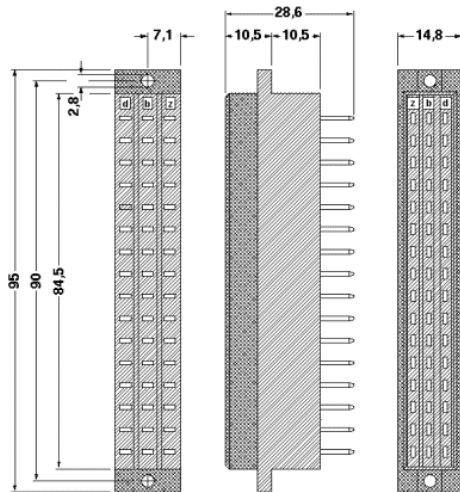

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)