

## Sensor/Actuator cable - SAC-8P- 5,0-800/M12FS - 1445318

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator cable, 8-pos., special TPE halogen-free, welding sputter-resistant, highly flexible, gray RAL 7001, free cable end to angled M12 socket, A-coded, cable length: 5 m

as in the figure, but with a gray conductor



### Key commercial data

Packing unit	1 1
Minimum order quantity	50 1
Custom tariff number	85444290
Country of origin	Poland

### Classifications

#### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27279218
eCl@ss 7.0	27279218
eCl@ss 8.0	27279218

#### ETIM

ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

#### UNSPSC

UNSPSC 6.01	31251501
-------------	----------

# Sensor/Actuator cable - SAC-8P- 5,0-800/M12FS - 1445318


## Classifications

### UNSPSC

UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501


## Drawings

Schematic diagram




Pin assignment M12 socket, 8-pos., A-coded, view female side

Cable cross section




PUR, halogen-free, highly stranded, resistant to welding sparks, gray [800]

Dimensioned drawing

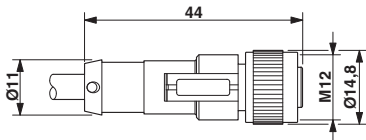

M12 x 1 socket, straight

Circuit diagram



Contact assignment of the M12 socket

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)