


FK-MPT 0,5/ 6-3,5

Order No.: 1891108

The figure shows a 10-position version of the product

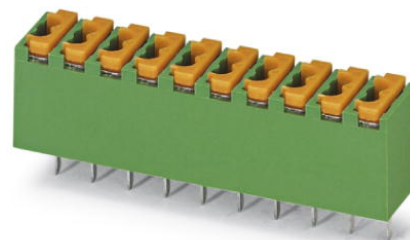

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1891108>

PC terminal block, Nominal current: 4 A, Nom. voltage: 160 V, Pitch: 3.5 mm, Number of positions: 6, Type of connection: Spring-cage conn., Mounting: Soldering, Conductor/PCB connection direction: 90 °, Color: green

Commercial data

GTIN (EAN)	 4 017918 169626
Note	Made-to-order
sales group	E411
Pack	50 pcs.
Customs tariff	85366990
Catalog page information	Page 451 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	7 mm
Pitch	3.5 mm
Dimension a	17.5 mm

Number of positions	6
Pin dimensions	0,4 x 0,9 mm
Hole diameter	1 mm

Technical data

Range of articles	FK-MPT 0,5/..-V
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal cross section	0.5 mm ²
Maximum load current	4 A (with 0.5 mm ² conductor cross section)
Insulating material	PBT
Inflammability class acc. to UL 94	V0
Stripping length	6.5 mm
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	4 A
Nominal voltage, UL/CUL Use Group D	300 V
Nominal current, UL/CUL Use Group D	4 A

Connection data

Conductor cross section solid min.	0.12 mm ²
Conductor cross section solid max.	0.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	20
Minimum AWG according to UL/CUL	28
Maximum AWG according to UL/CUL	20

Certificates / Approvals



Certification

CCA, CUL, GOST, SEV, UL

Accessories

Item	Designation	Description
General		
1905382	FK-MPT 0,5/ 6-IC-3,5	Header, Nominal current: 3 A, Rated voltage (III/2): 250 V, Number of positions: 6, Pitch: 3.5 mm, Color: black, Metal surface: Sn, Assembly: Soldering, The touch-protected basic strip, serves to accommodate the FK-MPT 0,5 PCB terminal block.
1905531	FK-MPT 0,5/ 6-ICV-3,5	Header, Nominal current: 3 A, Rated voltage (III/2): 250 V, Number of positions: 6, Pitch: 3.5 mm, Color: black, Metal surface: Sn, Assembly: Soldering, The touch-protected basic strip, serves to accommodate the FK-MPT 0,5 PCB terminal block.

Tools


1204504	SZF 0-0,4X2,5	Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip
---------	---------------	--

Additional products


Item	Designation	Description
General		
1905382	FK-MPT 0,5/ 6-IC-3,5	Header, Nominal current: 3 A, Rated voltage (III/2): 250 V, Number of positions: 6, Pitch: 3.5 mm, Color: black, Metal surface: Sn, Assembly: Soldering, The touch-protected basic strip, serves to accommodate the FK-MPT 0,5 PCB terminal block.
1905531	FK-MPT 0,5/ 6-ICV-3,5	Header, Nominal current: 3 A, Rated voltage (III/2): 250 V, Number of positions: 6, Pitch: 3.5 mm, Color: black, Metal surface: Sn, Assembly: Soldering, The touch-protected basic strip, serves to accommodate the FK-MPT 0,5 PCB terminal block.

Diagrams/Drawings


Drilling plan/solder pad geometry

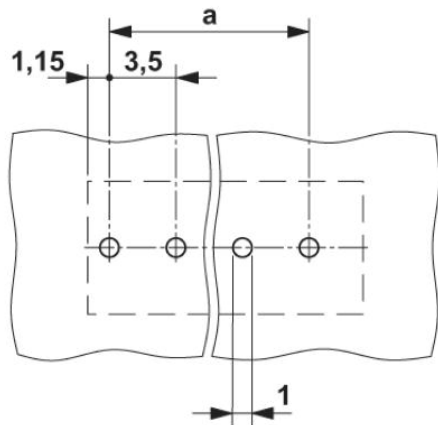

Diagram

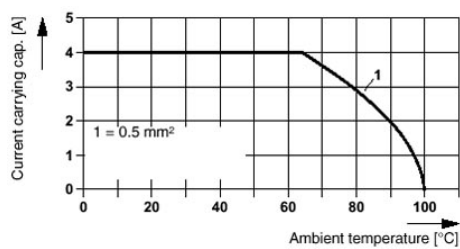

Dimensioned drawing

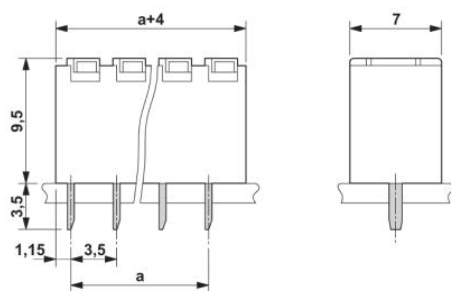

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)