

Component housing - HS LC-H-D2/ R2XC1-2,54 - 2202316

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fiber optics can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed), Color: transparent



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	100 STK
Custom tariff number	90019000
Country of origin	Tunisia

Technical data

General

Housing type	Fiber optics
Housing material	PC
Color	transparent

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

Dimensions

Pitch	2.54 mm
-------	---------

Technical data

Flammability rating according to UL 94	HB
Number of positions	2

Standards and Regulations

Component housing - HS LC-H-D2/ R2XC1-2,54 - 2202316


Technical data

Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Drawings

Dimensional drawing

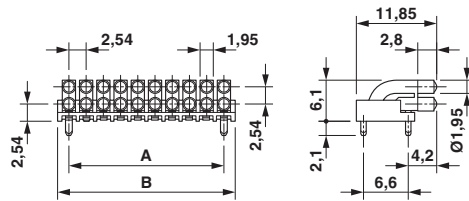

Details on positioning inside the electronics housing can be found in the download area under "Design-In"

Classifications

eCl@ss

eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 5.0	EC001031
----------	----------

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)