


# ST-REL4-SW 24/21-21


Order No.: 2825539

The illustration shows version ST-REL 4-SG 48/21-21

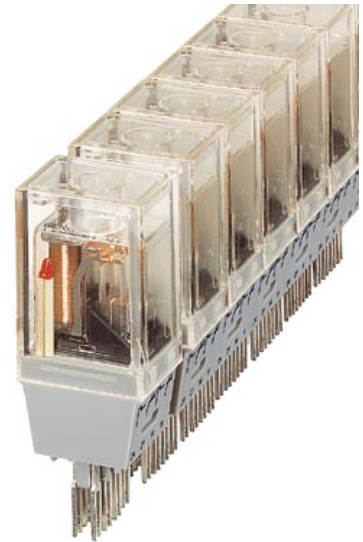

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2825539>

Relay connector, equipped with Siemens KAMMRELAIS ®, contacts (Ag): medium loads, 2 PDT, input voltage 24 V AC, with light indicator, can be plugged onto basic termination blocks

| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 077808 |
| Note                     | Made-to-order  |
| sales group              | G014   |
| Pack                     | 10 pcs.  |
| Customs tariff           | 85364190   |
| Catalog page information | Page 85 (IF-2002)  |

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data                            |                          |
|---|--------------------------|
| <b>Coil side</b>                          |                          |
| Nominal input voltage $U_N$               | 24 V AC                  |
| Input voltage range in reference to $U_N$ | 0.8 ... 1.1              |
| Nominal input current at $U_{IN}$         | 55 mA                    |
| Typical response time                     | 4 ms ... 15 ms (with AC) |

|                            |                          |
|----------------------------|--------------------------|
| Typical release time range | 4 ms ... 15 ms (with AC) |
| Operating voltage display  | Yes                      |

**Contact side**

|                                       |   |
|---------------------------------------|---|
| Contact type                          | Single contact, 2-PDT   |
| Contact material                      | Silver (Ag), gold-flashed   |
| Maximum switching voltage             | 250 V AC/DC   |
| Maximum inrush current                | 5 A   |
| Limiting continuous current           | 5 A   |
| Interrupting rating (ohmic load) max. | 120 W (at 24 V DC)<br>60 W (for 48 V DC)<br>50 W (for 60 V DC)<br>50 W (for 110 V DC)<br>70 W (for 220 V DC)<br>500 VA (for 250 V AC) |

**General data**

|  |  |
|--|--|
| Width                                    | 27 mm  |
| Height                                   | 33 mm  |
| Depth                                    | 66.5 mm  |
| Test voltage relay winding/relay contact | 1 kV AC (50 Hz, 1 min.)  |
| Test voltage PDT/PDT                     | 1 kV AC (50 Hz, 1 min.)  |
| Ambient temperature (operation)          | -20 °C ... 60 °C   |
| Ambient temperature (storage/transport)  | -20 °C ... 70 °C   |
| Operating mode                           | 100% operating factor  |
| Mechanical service life                  | Approx. 10 <sup>7</sup> cycles (approx. 10 <sup>6</sup> with AC relay)   |
| Standards/regulations                    | DIN VDE 0110b, Gr. C for 250 V DC<br>DIN VDE 0160 (in relevant parts)<br>DIN VDE 0110b, Gr. C for 250 V DC<br>DIN VDE 0160 (in relevant parts) |

**Certificates / Approvals**



Certification


GOST

**Additional products**

| Item           | Designation  | Description   |
|----------------|--------------|---|
| <b>General</b> |              |   |
| 2777056        | UDK-RELG 4   | Basic termination blocks with test connection on both sides and double connections with the same potential for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos. |
| 2820149        | URELG 4      | Basic termination blocks with screw connection for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos.   |
| 2820712        | URELG 4-PMTK | Basic termination blocks with test connection on both sides and knife disconnection for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos.                        |
| 2829920        | ZFK-RELG 4   | Basic termination blocks with spring-cage connection for NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos.   |

**Diagrams/Drawings**

Circuit diagram

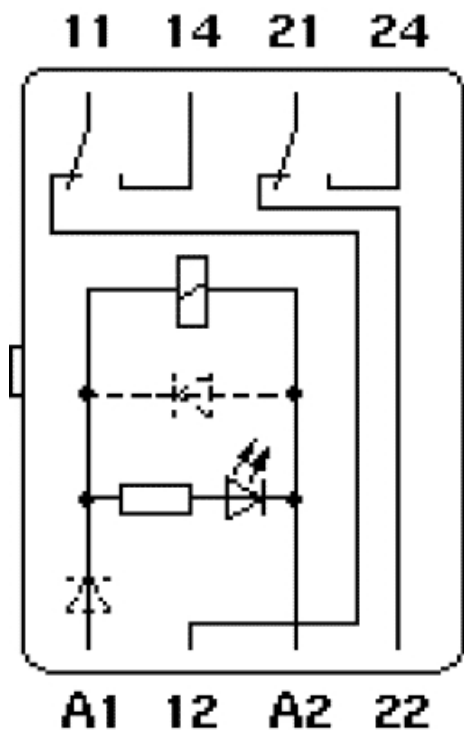

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)