


## Cable sleeve - CES-SRG-BK-8 - 0801625

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Small, slotted cable sleeves suitable for cables with a diameter of 7 ... 8 mm, material: NBR

### Product Description

Slotted sleeves for accommodating pre-assembled cables and lines with a diameter of 7 ... 8 mm, can be used in CES sealing frames. When fitted, the sleeves also ensure strain relief according to DIN EN 50262.



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 10 pc    |
| Weight per Piece (excluding packing) | 8.0 g    |
| Custom tariff number                 | 40169300 |
| Country of origin                    | Taiwan   |

### Technical data

#### Dimensions

|                         |                  |
|-------------------------|------------------|
| External cable diameter | 1x 7 mm ... 8 mm |
| Length                  | 29.5 mm          |
| Width                   | 19.5 mm          |
| Height                  | 17 mm            |

#### Ambient conditions

|                                 |   |
|---------------------------------|---|
| Degree of protection            | IP54 (for sealing frames with screw locking. IP44 sealing frames with locking latch.) |
| Ambient temperature (operation) | -40 °C ... 125 °C (static)  |

#### General

|                     |  |
|---------------------|--|
| Product description | Slotted sleeves for accommodating pre-assembled cables and lines with a diameter of 7 ... 8 mm, can be used in CES sealing frames. When fitted, the sleeves also ensure strain relief according to DIN EN 50262. |
|---------------------|--|

# Cable sleeve - CES-SRG-BK-8 - 0801625

## Technical data

### General

|                   |       |
|-------------------|-------|
| No. of conductors | 1     |
| Material          | NBR   |
| Color             | black |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27081002 |
| eCl@ss 4.1 | 27081002 |
| eCl@ss 5.0 | 27081002 |
| eCl@ss 5.1 | 27081002 |
| eCl@ss 6.0 | 27081002 |
| eCl@ss 7.0 | 27081002 |
| eCl@ss 8.0 | 27069220 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000879 |
| ETIM 4.0 | EC000451 |
| ETIM 5.0 | EC000451 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212109 |
| UNSPSC 7.0901 | 39121708 |
| UNSPSC 11     | 39121708 |
| UNSPSC 12.01  | 39121708 |
| UNSPSC 13.2   | 39121708 |

## Approvals

### Approvals

---

Approvals

GL

---

Ex Approvals

---

## Cable sleeve - CES-SRG-BK-8 - 0801625

### Approvals

Approvals submitted


---

### Approval details

GL

### Drawings

Dimensional drawing

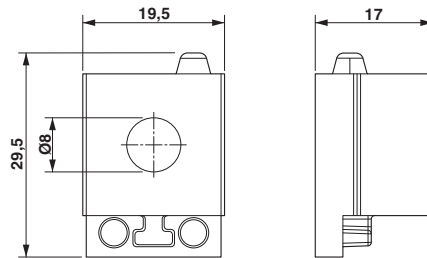

Dimensional drawing

---

Phoenix Contact 2015 © - all rights reserved  
<http://www.phoenixcontact.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)