


HC-B 6-TMB-100/O1STM20S-EUA

Order No.: 1604191



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604191>

HEAVYCON ADVANCE for increased environmental requirements, sleeve housing B6, with bayonet locking, height 100 mm, with 1xM20 thread, lateral cable outlet

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 947873 |
| Note | Made-to-order |
| sales group | D201 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 476 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|---------------------|--|
| General data | |
| Note | For contact inserts HC-B6, BB10, DD24, M |
| Design | B6 |
| Height | 100 mm |
| Width | 57 mm |


| | |
|---------------------------------|--|
| Length | 92 mm |
| Housing type | Sleeve housings |
| Locking type | Bayonet locking |
| Cable exit | Lateral |
| Type of the screw connection | 1x M20 |
| Degree of protection | IP65/67 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Die-cast aluminum, corrosion resistant |
| Housing surface material | Powder-coated, black |
| Seal material | Viton |
| Material lock | High-grade steel |
| Material grip body interlock | PA-GF |
| Length of the assembly cutout | 52 mm |
| Width of the assembly cutout | 35 mm |

Accessories

| Item | Designation | Description |
|-----------------|--------------------|--|
| Assembly | | |
| 1604641 | HC-B-BF | Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking |
| General | | |
| 1690930 | HC-B 6-TMB-SD-IP65 | HEAVYCON ADVANCE IP65 protective cover B6, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm |
| 1604654 | HC-B-BF-SET | Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers |

Diagrams/Drawings

Dimensioned drawing

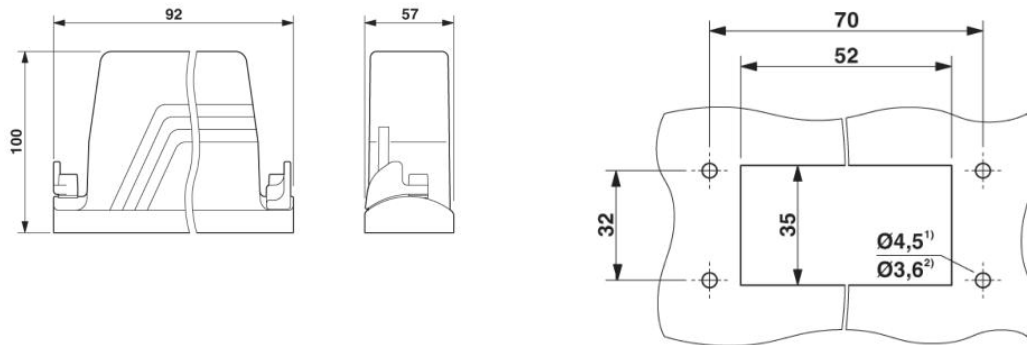

Mounting cutout

¹⁾ When M4 screws are used

²⁾ When self-tapping Torx screws are used
(Torx20, M4)

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)