

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



Lower part of housing, housing closed, fully assembled, with integrated functional earth ground contact, and metal foot catch

Product Features

- ▼ Tool-free mounting
- ✓ Large assembly area
- Recessed labeling areas
- Inflammability class V0 according to UL 94
- Fast mounting on DIN rails according to EN 60715
- Material and part identification embossed on the housing (recyclability)
- Cost savings thanks to easy device production
- Functional earth ground contact (EMC) integrated in the housing base
- Metal foot catch
- Optional BUS connection integrated in the housing, for either parallel or serial contacting



Key commercial data

Packing unit	11
GTIN	4 017918 126551
Weight per Piece (excluding packing)	44.61 GRM
Custom tariff number	85472000
Country of origin	Germany

Technical data

General

05.11.2013 Page 1 / 9



Technical data

General

Housing type	Component housing
Housing material	Polyamide
Color	green

Ambient conditions

Ambient temperature (operation)	-40 °C 105 °C
---------------------------------	---------------

Dimensions

Length	99 mm
Constructional height	114.5 mm
Width	17.5 mm

Technical data

Inflammability class according to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	4.9 W 8.9 W
Number of positions	12

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501

05.11.2013 Page 2 / 9



Classifications

UNSPSC

UNSPSC 13.2	31261501
Approvals	
Approvals	
Approvals	
UL Recognized	
Ex Approvals	
Approvals submitted	
Approval details	
UL Recognized \$\)	

Accessories

Accessories

Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

Coding profile - CP-MSTB - 1734634



Coding profile, is inserted into the slot on the plug or inverted header, red insulating material

05.11.2013 Page 3 / 9



Accessories

Component housing center part

Electronic housing - ME 35 UTM - 2908265



Intermediate element for modular extension of the volume of the housing in the pitch. The open intermediate element is 17.5 mm wide

Electronic housing - ME 35 UTMG - 2908275



Intermediate element for modular extension of the volume of the housing in the pitch. The closed intermediate element is 17.5 mm wide.

Electronic housing - ME 35 UTMG - 2908275



Intermediate element for modular extension of the volume of the housing in the pitch. The closed intermediate element is 17.5 mm wide.

Filler plug

Electronic housing - ME B-17,5 MSTBO GN - 2906869



Filler plugs, for unoccupied terminal points



Accessories

Electronic housing - ME B-17,5 MKDSO GN - 2906885



Filler plugs, for unoccupied terminal points

Ground contact

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Mounting material

Components of electronic housing - ME-SAS - 2853899



Shield connection clamp for printed circuit terminal block

Electronic housing - ME LPZS - 2906911



PCB stop, for soldering onto PCB



Accessories

Electronic housing - ME MF 17,5 - 2908281





Electronic housing - ME LPZS - 2906911



PCB stop, for soldering onto PCB


Electronic housing - ME MF 17,5 - 2908281


Metal foot catch, for intermediate elements.



PCB

Electronic housing - ME LP - 2906908







Accessories

Electronic housing - ME 17,5 OT-MSTBO SET - 2907431

Housing upper part, complete with COMBICON headers and screw connectors for full mounting of components. 12-pos., housing width: 17.5 mm



Electronic housing - ME 17,5 OT-MSTBO GN - 2906827



Upper part of housing, for COMBICON connection, double-level

Electronic housing - ME 17,5 OT-MKDSO SET - 2907460





Electronic housing - ME 17,5 OT-MKDSO GN - 2906843




Housing upper part, for printed circuit terminal block connection

Drawings



Dimensioned drawing


Dimensioned drawing



Inner housing dimensions, electronic housing ME 22.5 \dots

Dimensions of the electronic housing ME... with double-level upper part


Dimensioned drawing



Dimensions of the electronic housing ME... with double-level upper part



Dimensioned drawing

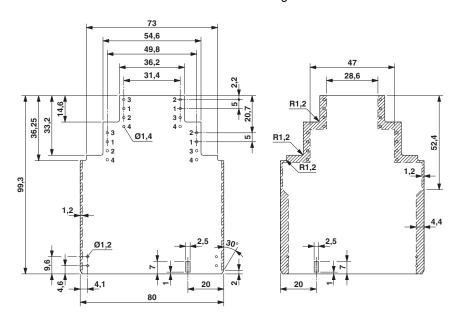

Dimensional drawing of the ME... printed circuit board if the double level upper part is used

© Phoenix Contact 2013 - all rights reserved http://www.phoenixcontact.com

单击下面可查看定价,库存,交付和生命周期等信息

>>Phoenix Contact(菲尼克斯)