

Sensor/Actuator cable - SAC-4P- 1,5-PVC/M12FS - 1544976

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 4-position, PVC, Black RAL 9005, Free cable end, on Socket straight M12, A-coded, Cable length: 1.5 m



Key commercial data

| | |
|--------------------------------------|----------|
| Packing unit | 1 1 |
| Weight per Piece (excluding packing) | 67.5 GRM |
| Custom tariff number | 85444290 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--|-------|
| Length of cable | 1.5 m |
| Stripping length of the free conductor end | 50 mm |

Ambient conditions

| | |
|----------------------|------|
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |

General

| | |
|------------------------|--------------|
| Rated current at 40°C | 4 A |
| Rated voltage | 250 V |
| Number of positions | 4 |
| Contact resistance | ≤ 5 mΩ |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Status display | No |
| Surge voltage category | II |

Sensor/Actuator cable - SAC-4P- 1,5-PVC/M12FS - 1544976

Technical data

General

| | |
|-----------------------------|-------|
| Pollution degree | 3 |
| Insertion/withdrawal cycles | ≥ 100 |

Material

| | |
|---|---|
| Inflammability class according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Cable

| | |
|------------------------------------|--------------------------------|
| Cable type | PVC black |
| Cable abbreviation | LiYY |
| Conductor cross section | 0.34 mm ² |
| AWG signal line | 22 |
| Conductor structure signal line | 42x 0.10 mm |
| Core diameter including insulation | 1.52 mm ±0.02 mm |
| Thickness, insulation | ≥ 0.23 mm (Core insulation) |
| | ≥ 0.76 mm (Outer cable sheath) |
| Wire colors | brown, white, blue, black |
| Overall twist | 4 wires, twisted |
| External sheath, color | Black RAL 9005 |
| External cable diameter | 5.20 mm |
| Cable weight | 43 kg/km |
| Outer sheath, material | PVC |
| Material conductor insulation | PVC |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 100 MΩ*km |
| Conductor resistance | max. 57.3 Ω/km |
| Nominal voltage, cable | 300 V |
| Test voltage, cable | 2500 V |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
|------------|----------|

Sensor/Actuator cable - SAC-4P- 1,5-PVC/M12FS - 1544976

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approvals submitted

Approval details

Sensor/Actuator cable - SAC-4P- 1,5-PVC/M12FS - 1544976

Approvals


| | |
|--------------------|-------|
| UL Listed | |
| Nominal current IN | 4 A |
| Nominal voltage UN | 300 V |

| | |
|--------------------|-------|
| cUL Listed | |
| Nominal current IN | 4 A |
| Nominal voltage UN | 300 V |

| | |
|--------------|--|
| cULus Listed | |
|--------------|--|


Drawings

Schematic diagram



Pin assignment M12 socket, 4-pos., A-coded, view female side


Cable cross section



PVC black [PVC]

Sensor/Actuator cable - SAC-4P- 1,5-PVC/M12FS - 1544976

Dimensioned drawing

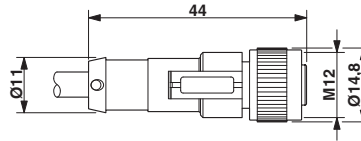

M12 x 1 socket, straight

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)