

System connectors - FLKM 50/4-FLK14/PA-S135 - 2288590

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapter, for Siemens SIMATIC® S5-135U, 4 x 8 channels can be connected

The illustration shows versions
FLKM 50-PA-S135/P and FLKM
50/4-FLK14/PA-S135



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 057114
Weight per Piece (excluding packing)	255.8 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	< 50 V AC
	60 V DC
Max. permissible current	0.5 A (per path)
	8 A (per connection, supply via separate power supply)
Max. permissible total current	3 A (per Byte, for supply via connector)
Channels which can be connected	32
Connection type, connector	Flat-ribbon cable connector in acc. with IEC 60603-13
Number of connectors	4
No. of positions, connector	14
Number of positions	50
Mounting position	any

System connectors - FLKM 50/4-FLK14/PA-S135 - 2288590

Technical data

General

Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Pollution degree	2
Surge voltage category	II

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242208

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC002584

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

System connectors - FLKM 50/4-FLK14/PA-S135 - 2288590

Approvals

Approvals

GOST

Ex Approvals


Approvals submitted

Approval details

GOST 

Drawings

Circuit diagram

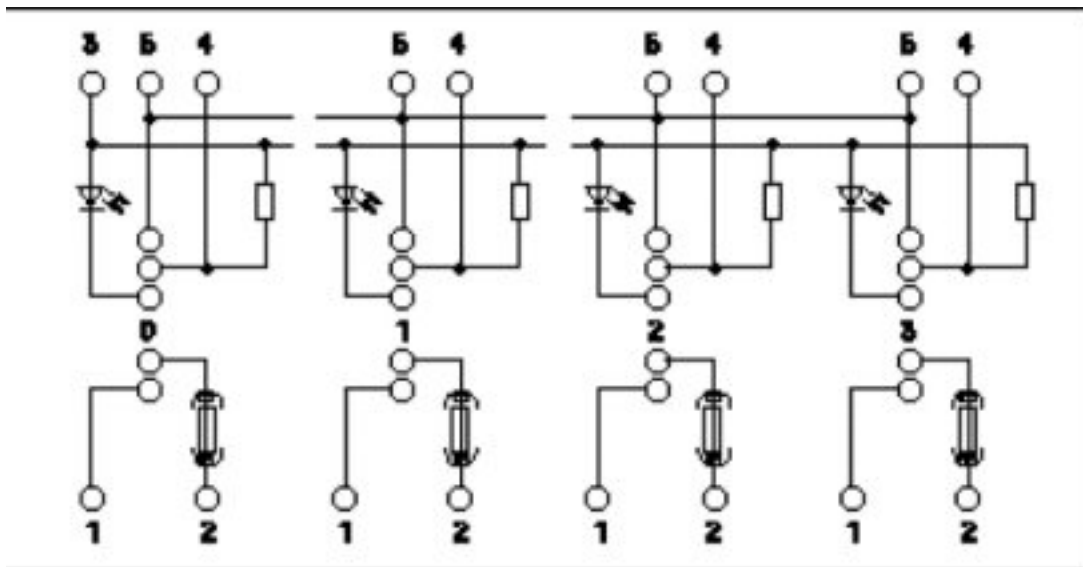

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)