

## Base strip - IPCV 16/ 5-GF-10,16 - 1969807

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 76 A, Rated voltage (III/2): 1000 V, Number of positions: 5, Pitch: 10.16 mm, Color: green, Contact surface: Silver, Assembly: Soldering

The figure shows a 5-pos. version of the product

### Product Features

- ✓ Integrated double steel spring
- ✓ CS-IPC 16/6 for anti-rotation protection during assembly
- ✓ Inverted vertical IPC 16 headers for implementing a touch-proof PCB output or a PCB/PCB connection (in combination with PC 6-16 base strips)



### Key commercial data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| Minimum order quantity               | 50 pc                                                                                                   |
| GTIN                                 | <br>4 017918 946814 |
| Weight per Piece (excluding packing) | 23.22 GRM                                                                                               |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Poland                                                                                                  |

### Technical data

#### Dimensions

|                |           |
|----------------|-----------|
| Length         | 13.6 mm   |
| Pitch          | 10.16 mm  |
| Dimension a    | 40.64 mm  |
| Pin dimensions | 0,8 x 1,2 |
| Pin spacing    | 10.16 mm  |
| Hole diameter  | 1.7 mm    |

## Base strip - IPCV 16/ 5-GF-10,16 - 1969807

### Technical data

#### General

|                                         |               |
|-----------------------------------------|---------------|
| Range of articles                       | IPCV 16/..-GF |
| Insulating material group               | I             |
| Rated surge voltage (III/3)             | 8 kV          |
| Rated surge voltage (III/2)             | 8 kV          |
| Rated surge voltage (II/2)              | 8 kV          |
| Rated voltage (III/3)                   | 1000 V        |
| Rated voltage (III/2)                   | 1000 V        |
| Rated voltage (II/2)                    | 1000 V        |
| Nominal current $I_N$                   | 76 A          |
| Maximum load current                    | 76 A          |
| Insulating material                     | PA            |
| Inflammability class according to UL 94 | V0            |
| Color                                   | green         |
| Number of positions                     | 5             |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

## Base strip - IPCV 16/ 5-GF-10,16 - 1969807

### Approvals

#### Approvals

#### Approvals

UL Recognized / SEV / cUL Recognized / CCA / GOST / GOST / cULus Recognized

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                                  |       |       |       |
|--------------------------------------------------------------------------------------------------|-------|-------|-------|
| UL Recognized  |       |       |       |
|                                                                                                  | B     | C     | D     |
| Nominal current I <sub>N</sub>                                                                   | 66 A  | 66 A  | 5 A   |
| Nominal voltage U <sub>N</sub>                                                                   | 300 V | 300 V | 600 V |

|                                |        |
|--------------------------------|--------|
| SEV                            |        |
|                                |        |
| Nominal current I <sub>N</sub> | 76 A   |
| Nominal voltage U <sub>N</sub> | 1000 V |

|                                                                                                    |       |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|-------|
| cUL Recognized  |       |       |       |
|                                                                                                    | B     | C     | D     |
| Nominal current I <sub>N</sub>                                                                     | 66 A  | 66 A  | 5 A   |
| Nominal voltage U <sub>N</sub>                                                                     | 300 V | 300 V | 600 V |

|                                |        |
|--------------------------------|--------|
| CCA                            |        |
|                                |        |
| Nominal current I <sub>N</sub> | 76 A   |
| Nominal voltage U <sub>N</sub> | 1000 V |

## Base strip - IPCV 16/ 5-GF-10,16 - 1969807

### Approvals


GOST 

GOST 

cULus Recognized 


### Drawings

Drilling diagram

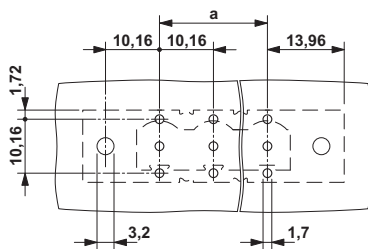

The illustration shows the 3-pos. version

Dimensioned drawing

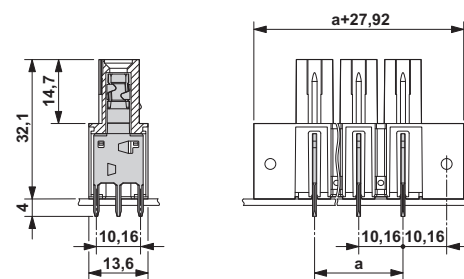

The illustration shows the 3-pos. version

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)