

Front adapters - FLKM 14-PA-INLINE/DIO8 - 2900889

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

VARIOFACE front adapter for Inline HD modules, for transferring 8 digital signals.



Key commercial data

Packing unit	1 pc
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	< 50 V DC
Max. permissible current	1 A (per path)
Channels which can be connected	8
Connection type, connector	IDC/FLK pin strip (2.54 mm)
Number of connectors	1
No. of positions, connector	14
Mounting position	any
Standards/regulations	DIN EN 50178
	IEC 60664
	IEC 62103

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Supported controller

Controller	PHOENIX CONTACT Inline
- suitable I/O card	IB IL 24 DO8/HD-PAC

Front adapters - FLKM 14-PA-INLINE/DIO8 - 2900889

Technical data

Supported controller

	IB IL 24 DI8/HD-PAC
--	---------------------

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27261206
eCl@ss 7.0	27440201
eCl@ss 8.0	27440201

ETIM


ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC000237
ETIM 5.0	EC002584

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

Drawings

Circuit diagram

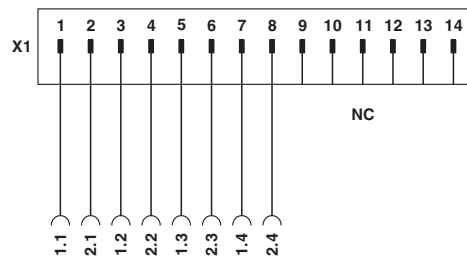

Connection scheme for FLKM 14-PA-INLINE/DIO8

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)