

EMC filter - NEF 1- 1 - 2794123

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Mains interference filter, with universal foot for mounting on NS 32 and NS 35/7.5, nominal current: 1 A

Why buy this product

- DIN rail module
- For single-phase circuits



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 072810
Weight per Piece (excluding packing)	95.16 g
Custom tariff number	85363010
Country of origin	Germany

Technical data

Dimensions

Height	79.4 mm
Width	25 mm
Depth	84.15 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 100 °C (HMF)
---------------------------------	-------------------------

General

Housing material	PA
------------------	----

EMC filter - NEF 1- 1 - 2794123

Technical data


General

Flammability rating according to UL 94	V-2
Color	black
Standards for clearances and creepage distances	IEC 60664-1
	VDE 0110-1
Type	Rail-mountable module, one-piece
Mounting type	DIN rail: 35 mm
Number of positions	2
Direction of action	1L-N & N-PE

Protective circuit, filter

Discharge resistance	1 MΩ
----------------------	------

Drawings

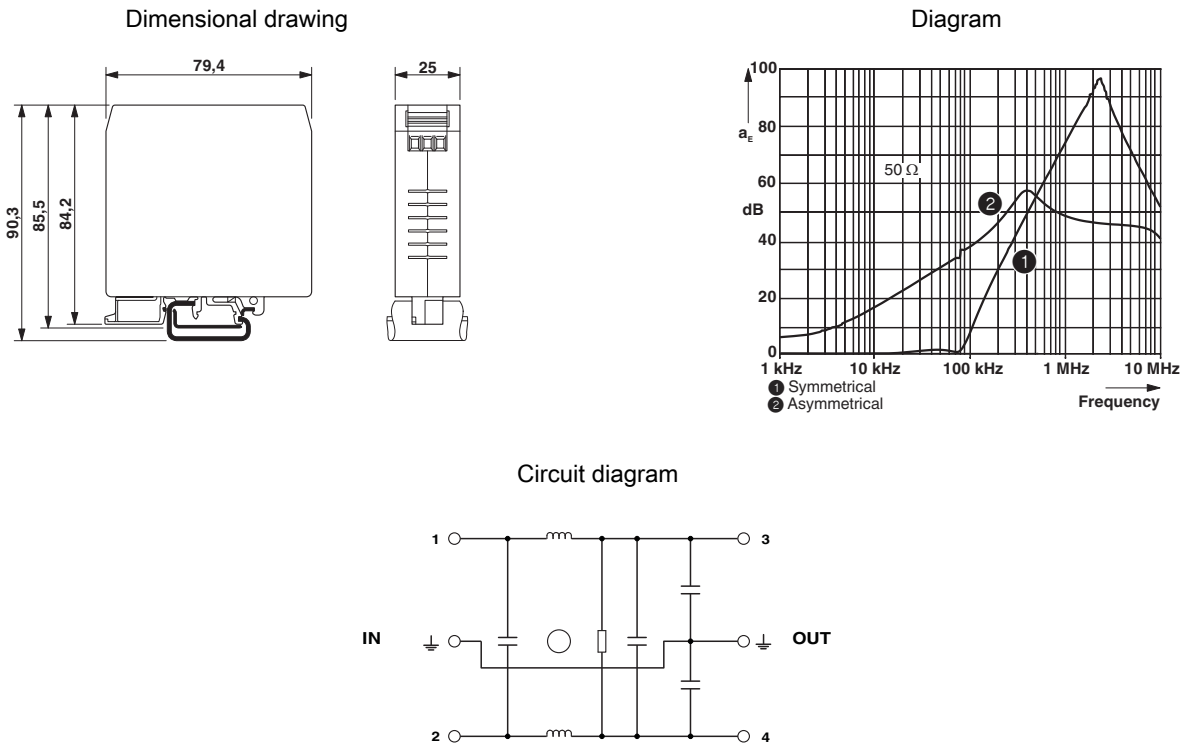

Classifications

eCl@ss

eCl@ss 4.0	27140201
------------	----------

EMC filter - NEF 1- 1 - 2794123

Classifications

eCl@ss

eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130806
eCl@ss 7.0	27130806
eCl@ss 8.0	27130806
eCl@ss 9.0	27130806

ETIM

ETIM 2.0	EC000942
ETIM 3.0	EC000942
ETIM 4.0	EC000942
ETIM 5.0	EC000942

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

UL Recognized / VDE Zeichengenehmigung / EAC / EAC

Ex Approvals

Approvals submitted

Approval details

EMC filter - NEF 1- 1 - 2794123

Approvals

UL Recognized 	
mm²/AWG/kcmil	22-12
Nominal current I _N	1 A
Nominal voltage U _N	250 V

VDE Zeichengenehmigung 	
mm²/AWG/kcmil	2.5
Nominal current I _N	1 A
Nominal voltage U _N	250 V

EAC

EAC

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)