

## Surge protection device - SYS N4X 120/240HLD - 2800716

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Indoor/outdoor lightning arrester and TVSS system for 120/208-240 V

### Product description

Combination lightning arrester and TVSS for 120/208-240 V. Components are housed in an IP66/NEMA 4X cabinet.



### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Weight per Piece (excluding packing) | 1.0 GRM  |
| Custom tariff number                 | 85363090 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

|        |        |
|--------|--------|
| Height | 500 mm |
| Width  | 400 mm |
| Depth  | 210 mm |

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Degree of protection            | IP66 / NEMA 4X   |
| Ambient temperature (operation) | -40 °C ... 80 °C |

#### General

|                                |                          |
|--------------------------------|--------------------------|
| NEMA power supply system       | 120/240 V High-Leg Delta |
| Housing material               | Stainless steel          |
| Mounting type                  | Surface/Wall mounting    |
| Surge protection fault message | Remote indicator contact |

#### Protective circuit

# Surge protection device - SYS N4X 120/240HLD - 2800716

## Technical data

### Protective circuit

|                                                                  |                  |
|------------------------------------------------------------------|------------------|
| IEC test classification                                          | I + II           |
| EN type                                                          | T1               |
| Nominal voltage $U_N$                                            | < 240 V          |
| Maximum continuous operating voltage $U_C$                       | 275 V AC         |
| Impulse discharge current (10/350) $\mu$ s charge                | 25 As            |
| Impulse discharge current (10/350) $\mu$ s, peak value $I_{imp}$ | 50 kA (per mode) |
| Response time                                                    | $\leq 25$ ns     |
| Follow current quenching capacity $I_f$                          | 50 kA            |

### Connection, protective circuit

|                                        |                    |
|----------------------------------------|--------------------|
| Connection method                      | Screw connection   |
| Conductor cross section stranded min.  | 16 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 35 mm <sup>2</sup> |
| Conductor cross section solid min.     | 10 mm <sup>2</sup> |
| Conductor cross section solid max.     | 50 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 6                  |
| Conductor cross section AWG/kcmil max  | 1                  |

### Remote indicator contact

|                                        |                      |
|----------------------------------------|----------------------|
| Connection method                      | Screw connection     |
| Conductor cross section stranded min.  | 0.14 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 1.5 mm <sup>2</sup>  |
| Conductor cross section solid min.     | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.     | 1.5 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min. | 28                   |
| Conductor cross section AWG/kcmil max  | 16                   |

### NEMA / UL data

|                                                               |        |
|---------------------------------------------------------------|--------|
| UL type                                                       | type 2 |
| Nominal discharge current $I_n$ (without reference direction) | 20 kA  |
| Maximum Surge Current per Phase                               | 50 kA  |
| Short-circuit current rating (SCCR)                           | 50 kA  |

### Standards and Regulations

|                       |                                             |
|-----------------------|---------------------------------------------|
| Standards/regulations | UL 1449 3 <sup>rd</sup> edition, Sept. 2009 |
|                       | IEC 60643-1                                 |
|                       | EN 61643-11                                 |
|                       | CAN/CSA-C22.2 No. 8                         |

## Surge protection device - SYS N4X 120/240HLD - 2800716

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27140201 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130805 |
| eCl@ss 7.0 | 27130805 |
| eCl@ss 8.0 | 27130805 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000942 |
| ETIM 4.0 | EC000941 |
| ETIM 5.0 | EC000941 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |
| UNSPSC 13.2   | 39121620 |

### Approvals

#### Approvals

---

Approvals

ETLus / cETL / cETLus

---

Ex Approvals

---

Approvals submitted

---

#### Approval details

|       |
|-------|
| ETLus |
|-------|

## Surge protection device - SYS N4X 120/240HLD - 2800716


### Approvals

cETL

cETLus

### Drawings

Circuit diagram

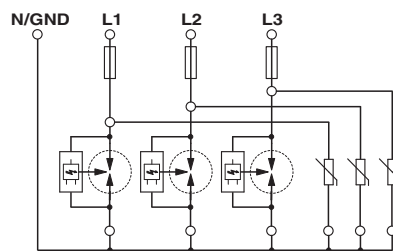

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)