

Support bracket - AB-SK-D TOP - 3062100

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Support bracket, Bracket for busbars, set every 20 cm, Length: 155.8 mm, Width: 5.2 mm, Color: gray



Product Features

- ✓ For mounting SK and SKS shield connection clamps
- ✓ Can be labeled with zack marker strip and KLM terminal strip markers
- ✓ Compact design with 5.2 mm pitch
- ✓ Parking option for bridges and plugs
- ✓ The 3 x 10 mm rail can be mounted in the supports vertically, horizontally, and at a 45° angle for optimum conductor placement
- ✓ For user-friendly shield connection, especially for single and multi-level terminal blocks and devices with a front connection



Key commercial data

Packing unit	1 PCE
Minimum order quantity	10 PCE
Weight per Piece (excluding packing)	32.0 GRM
Custom tariff number	85472000
Country of origin	China

Technical data

Dimensions

Length (b)	155.8 mm
Width (a)	5.2 mm

General

Color	gray
Inflammability class according to UL 94	V0
Material	PA

Support bracket - AB-SK-D TOP - 3062100

Classifications

eCl@ss

eCl@ss 4.0	23150301
eCl@ss 4.1	23150301
eCl@ss 5.0	27141143
eCl@ss 5.1	27141143
eCl@ss 6.0	27400607
eCl@ss 7.0	27400607
eCl@ss 8.0	27400607

ETIM


ETIM 2.0	EC000761
ETIM 3.0	EC000761
ETIM 4.0	EC000483
ETIM 5.0	EC001166

UNSPSC

UNSPSC 6.01	30212109
UNSPSC 7.0901	39121708
UNSPSC 11	39121708
UNSPSC 12.01	39121708
UNSPSC 13.2	39121708

Drawings

Dimensioned drawing

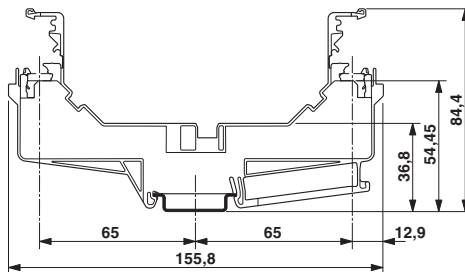

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)