

Power distributor - VS-PPC-J-4X-1227 - 1405387

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Power H distributor, 4 x MSTB contact inserts, metal housing, without mounting screws



Power H distributor

Product description

Power H distributor



Key commercial data

Packing unit	1 PCE
GTIN	 4 046356 419918
Custom tariff number	85444290
Country of origin	GERMANY

Technical data

Mechanical characteristics

Number of positions	5
Number of slots	4
Ambient temperature (operation)	-40 °C ... 70 °C

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Degree of protection	IP65/67

Material data

Housing material	Zinc die-cast
------------------	---------------

Electrical characteristics

Rated voltage (III/3)	24 V
-----------------------	------

Power distributor - VS-PPC-J-4X-1227 - 1405387

Technical data

Electrical characteristics

Rated current	16 A
---------------	------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440312

ETIM

ETIM 3.0	EC000374
ETIM 4.0	EC000374
ETIM 5.0	EC000374

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Accessories

Additional products

Assembly adapters - VS-PPC-J-M - 1405390




Mounting foot for the power H distributors, plastic


Drawings

Power distributor - VS-PPC-J-4X-1227 - 1405387

Dimensioned drawing

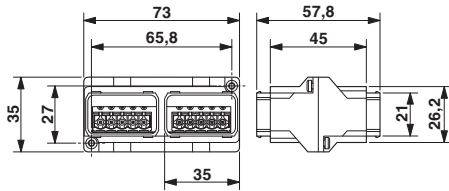

Circuit diagram



单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)