


# CN-LAMBDA/4-5.9-SB

Order No.: 2800023



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2800023>

Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces. Connection: N connectors male/female connector

Commercial data	
GTIN (EAN)	4  046356 410083
sales group	J401
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 171 (TT-2009)

### Product notes

WEEE/RoHS-compliant since:  
04/09/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Housing material	Brass (CuZn)
Color	nickel
Total surge current (8/20) $\mu$ s	60 kA
Total surge current (10/350) $\mu$ s	20 kA

Ambient temperature (operation)	-40 °C ... 90 °C
Mounting type	Connection-specific intermediate plugging
Design	Attachment plug
Degree of protection	IP68
Direction of action	Line-Shield/Earth Ground
Width	26.10 mm
Height	65.00 mm
Length	38.00 mm
<b>Protective circuit</b>	
IEC category	C2
	C3
	D1
VDE requirement class	C2
	C3
	D1
Nominal current $I_N$	5 A (25°C)
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Earth)	50 kA
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Shield)	50 kA
Total surge current (8/20) $\mu$ s	60 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Earth)	60 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Shield)	60 kA
Lightning test current (10/350) $\mu$ s, peak value $I_{imp}$	$\leq 20$ kA
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 11$ V (6 kV/3 kA)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Shield) spike	$\leq 11$ V (6 kV/3 kA)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) static	$\leq 11$ V (6 kV/3 kA)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Shield) static	$\leq 11$ V (6 kV/3 kA)
Protection level $U_P$ (Core-Earth)	$\leq 11$ V (6 kV/3 kA)
Protection level $U_P$ (Core-Shield)	$\leq 11$ V (6 kV/3 kA)
Input attenuation aE, asym.	Typ. 0.05 dB ( $\leq 0.15$ dB)
Frequency range	2.4 GHz ... 5.9 GHz

Standing wave ratio SWR in a 50 Ω system	Typ. 1.1 (≤ 1.20 (2.4 GHz...5.9 GHz))
Permissible HF power P <sub>max.</sub> at SWR=xx (50 Ohm system)	≤ 500 W
	≤ 4 kW (peak)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
	D1 (2.5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Shield)	C2 (10 kV/5 kA)
	D1 (2.5 kA)

#### Connection data

Type of connection	N Connector
Connection type IN	N connector, male
Connection type OUT	N connector, female

#### Connection, protective circuit

Standards/regulations	IEC 61643-21
-----------------------	--------------

#### Certificates / Approvals



Certification GOST

#### Accessories

Item	Designation	Description
<b>Assembly</b>		
2818135	CN-UB/MP	Tongue for attaching the CN-UB..., to housing panels, for example.
2803137	CN-UB/MP-90DEG-50	Angled bracket for individually fixing CN-UB... to housing panels, for example.

**Additional products**


Item	Designation	Description
------	-------------	-------------

**Assembly**

2818135	CN-UB/MP	Tongue for attaching the CN-UB..., to housing panels, for example.
---------	----------	--

**Diagrams/Drawings**

Circuit diagram

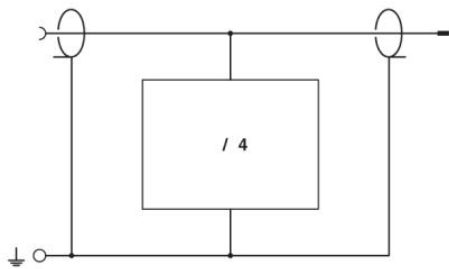

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)