


## QC 0,5/14-STF-3,81

Order No.: 1897665

The figure shows a 10-position version of the product

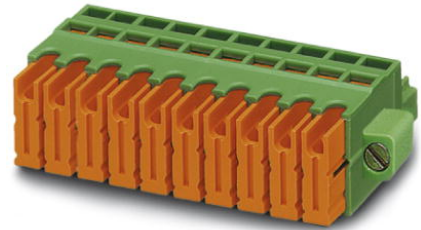

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1897665>

Plug component, Nominal current: 6 A, Nom. voltage: 320 V, Pitch:  
3.81 mm, Number of positions: 14, Connection type: Insulation  
displacement connection QUICKON, Color: green

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918165161      |
| Pack                     | 50 pcs.            |
| Customs tariff           | 85366990           |
| Weight/Piece             | 0.01286 KG         |
| Catalog page information | Page 157 (CC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

|                     |          |
|---------------------|----------|
| Pitch               | 3.81 mm  |
| Dimension a         | 49.53 mm |
| Number of positions | 14       |

#### Technical data

|                                    |                                                        |
|------------------------------------|--------------------------------------------------------|
| Insulating material group          | I                                                      |
| Rated surge voltage (III/3)        | 2.5 kV                                                 |
| Rated surge voltage (III/2)        | 2.5 kV                                                 |
| Rated surge voltage (II/2)         | 2.5 kV                                                 |
| Rated voltage (III/2)              | 320 V                                                  |
| Rated voltage (II/2)               | 630 V                                                  |
| Connection in acc. with standard   | EN-VDE                                                 |
| Nominal current $I_N$              | 6 A                                                    |
| Nominal voltage $U_N$              | 320 V                                                  |
| Nominal cross section              | 0.5 mm <sup>2</sup>                                    |
| Maximum load current               | 6 A (with 0.5 mm <sup>2</sup> conductor cross section) |
| Insulating material                | PA                                                     |
| Inflammability class acc. to UL 94 | V0                                                     |

#### Connection data

|                                        |                      |
|----------------------------------------|----------------------|
| Conductor cross section stranded min.  | 0.34 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 0.5 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min. | 22                   |
| Conductor cross section AWG/kcmil max  | 20                   |

#### Certificates / Approvals



Certification

CB, CUL, GOST, UL, VDE-PZI

#### CUL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 6 A   |
| AWG/kcmil             | 24-20 |

#### UL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 6 A   |
| AWG/kcmil             | 24-20 |

#### Accessories

| Item           | Designation              | Description                                                                                                                                                                  |
|----------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Marking</b> |                          |                                                                                                                                                                              |
| 0804109        | SK 3,81/2,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 140 terminal blocks |
| <b>Tools</b>   |                          |                                                                                                                                                                              |
| 1205202        | SZS 0,4X2,0              | Screwdriver, bladed, matches all screw terminal blocks up to 1.5 mm <sup>2</sup> connection cross section, blade width: 2.5 mm, without approvals                            |


#### Additional products

| Item           | Designation           | Description                                                                                                                                                      |
|----------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>General</b> |                       |                                                                                                                                                                  |
| 1829455        | DFK-MC 1,5/14-GF-3,81 | Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Direct mounting |
| 1897063        | EMC 1,5/14-GF-3,81    | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Press-in                                     |
| 1879405        | EMCV 1,5/14-GF-3,81   | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Press-in                                     |
| 1858154        | IMC 1,5/14-STGF-3,81  | Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Connection type: Screw connection, Color: green              |
| 1827981        | MC 1,5/14-GF-3,81     | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering                                    |
| 1843046        | MCD 1,5/14-G1F-3,81   | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering                                    |
| 1830224        | MCD 1,5/14-GF-3,81    | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering                                    |
| 1842885        | MCDV 1,5/14-G1F-3,81  | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering                                    |
| 1830376        | MCDV 1,5/14-GF-3,81   | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering                                    |
| 1830716        | MCV 1,5/14-GF-3,81    | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering                                    |
| 1832992        | MCVK 1,5/14-GF-3,81   | Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Assembly: DIN rail, Color: green                             |

|         |                      |                                                                                                                                             |
|---------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 1833140 | MCVU 1,5/14-GFD-3,81 | Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Assembly: Direct mounting, Color: green |
| 1827541 | SMC 1,5/14-GF-3,81   | Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 14, Color: green, Assembly: Soldering               |

Diagrams/Drawings

Dimensioned drawing

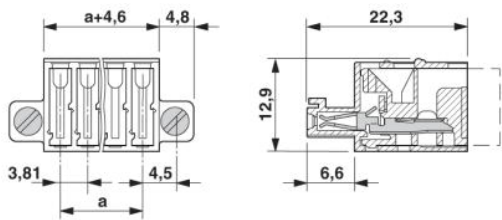

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)