


PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Accessories, Number of positions: 4, Pitch: 2.4 mm, Mounting: PCB connector



Why buy this product

- Corner connection for implementing complex arrangements of flexible LED printed-circuit boards
- Easy connection of flexible LED printed-circuit boards
- Minimal heating during operation
- UL-approved materials

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	20 STK
Weight per Piece (excluding packing)	0.500 g
Custom tariff number	85340019
Country of origin	Netherlands

Technical data


Environmental Product Compliance

China RoHS	No hazardous substances above threshold values
------------	--

Drawings

PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516

Dimensional drawing

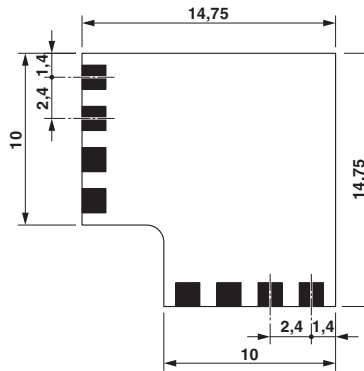

Classifications

eCl@ss

eCl@ss 5.1	27141190
eCl@ss 6.0	27260704
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002637

Accessories

Additional products

Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 2, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, Length of the punched-on cables: 500 mm, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 4-BB-10-H - 1707563



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516

Accessories

Printed-circuit board connector - PTF 0,3/ 4-WB-10-H - 1707565



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, Length of the punched-on cables: 500 mm, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)