

Printed-circuit board connector - PTSM 0,5/ 5-HHI1-2,5-THR R32 - 1810816

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 2.5 mm, Color: black, Contact surface: Tin, Assembly: Taped SMD/THT/THR components

The figure shows a 3-pos. version of the product



Key commercial data

| | |
|------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 500 pc |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|-------------|--------|
| Pitch | 2.5 mm |
| Dimension a | 10 mm |

General

| | |
|-----------------------------|---------------------|
| Range of articles | PTSM 0,5/..-HHI-THR |
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2) | 2.5 kV |
| Rated voltage (III/3) | 63 V |
| Rated voltage (III/2) | 160 V |
| Rated voltage (II/2) | 200 V |
| Nominal current I_N | 6 A |
| Maximum load current | 6 A |
| Insulating material | LCP |

Printed-circuit board connector - PTSM 0,5/ 5-HHI1-2,5-THR R32 - 1810816

Technical data

General

| | |
|---|-------|
| Inflammability class according to UL 94 | V0 |
| Color | black |
| Number of positions | 5 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002637 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

Approvals

Approvals

Approvals

GOST / UL Recognized

Ex Approvals

Printed-circuit board connector - PTSM 0,5/ 5-HHI1-2,5-THR R32 - 1810816

Approvals

Approvals submitted

Approval details


GOST

UL Recognized


| | |
|--------------------------------|-------|
| | B |
| Nominal current I _N | 5 A |
| Nominal voltage U _N | 150 V |

Drawings

Drilling diagram



Dimensioned drawing

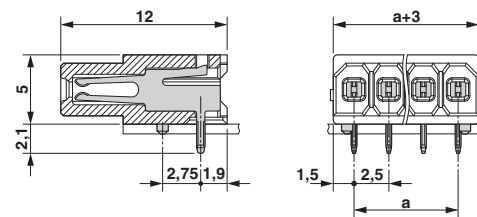

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)