

Coupler connector - CA-12M1N8A9503 - 1620002

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Coupling connector, straight, shielded: yes, SPEEDCON locking, M23, Number of positions: 12, Type of contact: Male connector, Crimp connection, Cable diameter: 6 mm ... 10 mm



Key Commercial Data

| | |
|----------------------|----------|
| Packing unit | 1 pc |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

Temperature range

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

Data of the insulating body

| | |
|---|--|
| Note | Order information Order crimp contacts Ø 1 mm separately |
| Coding | N |
| Insulator material | PA 66 |
| Contact connection method | Crimp connection |
| Type of contacts | Male connector |
| Number of positions | 12 |
| Contact diameter of power contacts | 1 mm |
| Nominal current per power contact at 25°C | 8 A |
| Nominal voltage, power contact | 150 V |
| Overvoltage category | III |
| Degree of pollution | 3 |

Housing data

| | |
|------------------|--|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking | SPEEDCON locking |

Coupler connector - CA-12M1N8A9503 - 1620002

Technical data

Housing data

| | |
|--|------|
| Degree of protection (when plugged in) | IP67 |
| Thread type | M23 |

Cable seal data

| | |
|---------------------|-------|
| Min. cable diameter | 6 mm |
| Max. cable diameter | 10 mm |
| Sealing material | FPM |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 272607xx |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260702 |
| eCl@ss 7.0 | 27440102 |
| eCl@ss 8.0 | 27440102 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002635 |
| ETIM 5.0 | EC002635 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 43201404 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC

Coupler connector - CA-12M1N8A9503 - 1620002

Approvals

Ex Approvals

Approvals submitted

Approval details

UL Recognized

cUL Recognized

EAC


Drawings

Schematic diagram



Contact chamber numbering (view of plug-in side), standard pin

Dimensional drawing

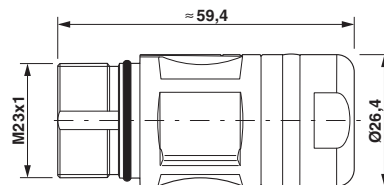

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)